

SANDEN STYLE — COMPRESSORS

TROUBLE SHOOTING CHART

SYMPTOM	PROBLEM DIAGNOSIS AND INSPECTION	CAUSE AND REMEDY REPAIR OR REPLACE			
LACK OF COOLING - (Smooth Running Compressor)					
Unusually high suction pressure with unusually low discharge pressure	1. Perform a valve plate test	Broken head or block gasket Broken or deformed reed valve Foreign substance under the reed valve or gasket			
Unusually low suction and discharge pressure	1. Check for low refrig. charge 2. Leak check compressor 3. Leak check and diagnose system (see service manual)	Shaft seal leak Cylinder head leak Gasket leak Oil filter plug leak Cracked cylinder block			
LACK OF COOLING - (Rough Running Compressor)					
Intermittent or Inoperative	1. Check belt tension 2. Check clutch air gap 3. Check clutch volts, amps, and coil lead wire	Adjust air gap Broken lead wire Clutch coil defect - internal System ground - see manual			
Rough Running	4. Perform shaft turning smoothness test	Compressor failure - internal			
UNUSUAL NOISE NOTE: Noises may be caused by components other than the compressor; however, it is normal to generate some noise.					
Clutch Engaged	1. Check compressor mounting 2. Check other engine parts 3. Check for intermittent or slipping clutch 4. Check for proper refrig.charge 5. Check clutch bearing 6. Oil level - insufficient 7. Shaft turning smoothness test 8. Remove valve plate and inspect	Loose belt, bracket or bolts Water or air pump, alt, timing belt Adjust air gap Defective coil Recharge and recheck Replace rotor / armature assm. Restore to proper level Compressor failure - internal Broken discharge valve reed or retainer Broken suction valve reed Broken gasket			
Clutch Disengaging or "Chattering"	1. Check air gap	Adjust air gap Defective clutch pulley or front plate			
BELT TENSION SPECIFICATIONS (recommended for maximum clutch bearing life)					
Grooves	Belt Wdth	Tension (lbs.)	Grooves	Grv Wdth	Tension(lbs.)
1 or 2	1/2"	121 ± 5	6 Multi	1/8"	180 ± 5
1 variable	1/2" / 9/16"	132 ± 5	7 Multi	1/8"	210 ± 5
1	5/8"	132 ± 5	8 Multi	1/8"	240 ± 5
			10 Multi	1/8"	300 ± 5
(Tolerance ± 4.95 lb; multi grooves based on 30 lb per groove)					

COMPRESSORS — SANDEN

Compressor Identification

R12 Compressors


SD 5 10 HD

Sanden _____
 Number of Cylinders _____
 Approx. Displacement (cu.in.) _____
 Heavy Duty Clutch _____

R134a Compressors

SD 7 H 15 HD

Sanden _____
 Number of Cylinders _____
 Port Location (H if on head, B if on Block) _____
 Approx. Displacement (cubic centimeters/10) _____
 Heavy Duty Clutch (HD) Sealed Heavy Duty (SHD) _____

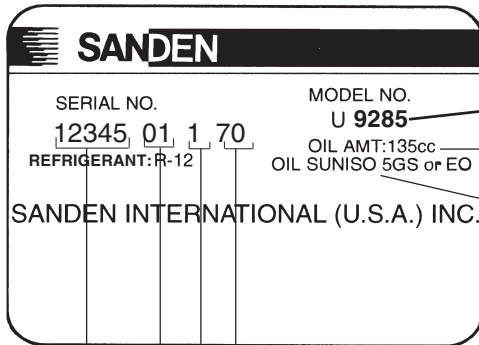

Serial Number _____
 Month of Manufacture _____
 Year of Manufacture _____
 Country Code _____


00-06 Japan
 70-79 USA
 80-89 Singapore

Part Number

Lubricant Amount

Lubricant Type

Year of Manufacture (first digit)
 Month of manufacture (last digit)
 Jan-Sept.: 1-9
 Oct.: X
 Nov.: Y
 Dec.: Z

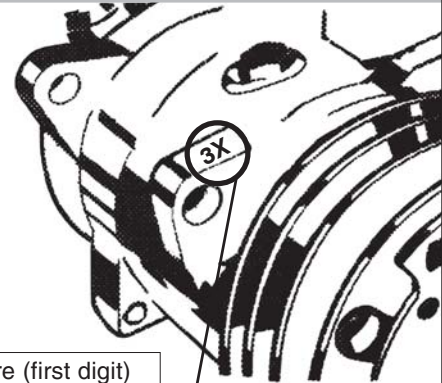

Compressor Specifications


MODEL	CYL.	REFRIG.	DISPL. CU IN (cc)	WEIGHT lbs.	NOTE	OIL TYPE	FACTORY OIL CHARGE cc.	ROTATION
SD 508, HD	5	R12	8.4 (138)	17.1	see note 2	Mineral	175 ± 15cc	CW / CCW
SD 510, HD	5	R12	9.8 (161)	16.5	see note 2	Mineral	135 ± 15 cc	CW Only
SD 5H14, HD	5	R134a	8.4 (138)	17.2	see note 2	PAG SP-15	210 ± 10 cc	CW / CCW
SD 709	7	R12	7.9 (130)	15.2	see note 2	Mineral	135 ± 15 cc	CW Only
SD 7H15HD	7	R134a	9.5 (155)	15.2	see note 1 and 2	PAG SP-15	300 ± 10 cc	CW Only
SD 7H15SHD	7	R134a	9.5 (155)	17.6	see note 1 and 2	PAG SP-15	300 ± 10 cc	CW Only

NOTE 1: Since 2005 most Sanden compressors have enough oil for the entire system. Check Sanden label for oil amount. Refer to Sanden compressor visual section pages 244 through 255 for oil capacity.

NOTE 2: Provided that no major oil loss occurred in the system, add the following amount of oil for each component.

- a.) Receiver Drier 1 oz.
- b.) Accumulator 1 oz. Plus same amount drained from old unit
- c.) Condenser 1 oz.
- d.) Evaporator 2 oz.
- e.) Hose None (all hoses replaced add 1 oz. total)
- f.) System Flushed add 1 -2 oz. extra to the system

Acceptable Mounting Angles



R134a PAG SP15 Oil



SP15 replaces SP20

and is completely interchangeable. Mixing PAGs is acceptable and will not void the warranty.

8248 8.45 oz.

Used when servicing Sanden Compressors in systems that are charged with R134a. For use with SD 5H14, 7H15 Compressors.

8166

Dipstick - Sanden oil level checker



Selecting The Correct Sanden Compressor

There are several different ways to choose the correct Sanden replacement compressor.

Application - refer to the application section looking up application by Make, Year and Model and select the compressor needed. If it is not listed in the application section then...

Part Number Description:

1. Locate the Identification Tag on the compressor body - the "Model No." found in the upper right corner is the Sanden "Part Number" needed.
2. Refer to the chart on page 234. The chart is listed in ascending order by the Sanden part numbers along with our corresponding number and the compressors characteristics or specifications.
3. Verify the compressor using the visual photo section. Part numbers are listed by our part number in ascending order.

1.

2.

COMPRESSORS — SANDEN												
Listed in ascending order by Sanden Number												
SANDEN NUMBER	CLUTCH CYL HD	COMP. CYL HD	MODEL	REFR	HEAD	POS	SIZE	FITTING	PULLEY DIA mm	GRV	CON. LEAD WIRE	
4505	5714	5655	5625	SDH14HD	R134a	FL	VERT	3/4x7/8	EAR	132	2	24V BULLET
4508	5712	5659	5625	SDH14	R134a	FL	VERT	3/4x7/8	EAR	132	2	12V BULLET
4509	5765	5657	5625	SDH14	R134a	FL	VERT	3/4x7/8	EAR	132	2	12V AMPAD000-1
4510	5759	5657	5625	SDH14HD	R134a	FL	VERT	3/4x7/8	EAR	132	2	12V AMPAD000-1
4511	5719	5659	5625	SDH14HD	R134a	C	VERT	1"14	EAR	158	1	12V BULLET
4512	5760	5657	5625	SDH14	R134a	M	HORIZ	1"14	EAR	132	2	12V AMPAD000-1
4514	5737	5659	5625	SDH14	R134a	FL	VERT	3/4x7/8	EAR	119	PV7	12V AMPAD000-1
4515	5715	5659	5625	SDH14HD	R134a	FL	VERT	3/4x7/8	EAR	158	1	12V BULLET
4516	5769	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4518	5762	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4519	5762	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4520	5714	5651	5625	SDH14HD	R134a	FL	VERT	3/4x7/8	EAR	132	1	12V BULLET
4528	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4537	5731	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4538	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4539	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4540	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4541	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4542	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4543	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4544	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4545	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4546	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4547	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4548	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4549	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4550	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4551	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4552	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4553	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4554	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4555	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4556	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4557	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4558	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4559	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4560	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4561	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4562	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4563	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4564	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4565	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4566	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4567	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4568	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4569	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4570	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4571	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4572	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4573	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4574	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4575	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4576	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4577	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4578	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4579	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4580	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4581	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4582	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4583	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4584	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4585	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4586	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4587	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4588	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4589	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4590	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4591	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4592	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4593	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4594	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4595	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4596	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4597	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4598	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4599	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4600	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4601	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4602	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4603	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4604	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4605	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4606	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4607	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4608	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4609	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4610	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4611	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4612	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4613	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4614	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4615	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4616	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4617	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4618	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4619	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4620	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4621	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4622	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4623	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4624	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4625	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8	EAR	132	2	12V BULLET
4626	5739	5659	5625	SDH14HD	R134a	K	HORIZ	3/4x7/8				

COMPRESSORS — SANDEN

Rear Head and Identification (Listed alphabetically by Style)

Style B  5628 Vertical Flare 3/4" x 7/8" SD508,510 Compressor with R12 Charging Ports	Style C  5634 Vertical Tube-O'ring 1" x 14 SD5H14 Compressor w/o Charging Ports	Style CB / CBA  5627 Vertical Tube-O'ring 1" x 14 7H13, 7H15 Compressor w/o Charging Ports	Style FC  5620 Vertical O'ring 3/4" x 7/8" 7H14 Compressor w/o Charging Ports
Style FG  5621 Vertical O'ring 3/4" x 7/8" SD505, 507, 510 Compressors with R12 Charging Ports	Style FL  5625 Vertical O'ring 3/4" x 7/8" 5H14 Compressor w/o Charging Ports	Style GH  NOT AVAILABLE Horizontal Tab Freightliner Slimline Connections	Style GK  5602 Horizontal Pad 3/4" x 7/8" SD7H15 Compressor with Pressure Relief Valve
Style GQ  NOT AVAILABLE Lateral Pad 3/4" x 7/8" SD7H15 w' Press Relief Valve	Style GSA  NOT AVAILABLE Lateral Pad Kenworth, Peterbilt	Style JD  5626 Vertical O'ring 3/4" x 7/8" 7H13, 7H15 Compressor w/o Charging Ports	Style JDA  5601 Vertical O'ring 3/4" x 7/8" SD7H15 Compressor with Pressure Relief Valve
Style K  5643 Horizontal O'ring 3/4" x 7/8" SD5H14 Compressor w/o Charging Ports	Style KC  5638C (Thick Head) Horizontal O'ring 3/4" x 7/8" SD7H15 Compressor	Style KCA  NOT AVAILABLE Horizontal O'ring 3/4" x 7/8" SD7H15 Compressor	Style KG  5638G (Thin Head) Horizontal O'ring 3/4" x 7/8" SD7H15 Compressor

Style M  5631 Horizontal O'ring 1" x 14 SD508, 5H14 Compressor w/o Charging Ports	Style MD / MDA  5632 Horizontal Tube-O'ring 1" x 14 SD708, 7H15 Compressor w/o Charging Ports	Style MJ / MJA  5603 Horizontal Tube-O 1" x 14 SD7H15 Compressor with Pressure Relief Valve	Style N  5622 Vertical Tube-O'ring 1" x 14 SD505,508, 510 Compressor with R12 Charging Ports	
Style PK  NOT AVAILABLE Side Pad 7H15SHD	Style Q  5630 Horizontal GM Pad SD508, 510, 5H14 w/o Charging Ports	Style QC  NOT AVAILABLE SD7H15 Compressor 3/8" x 24" Bolt Holes	Style QD  5635 Horizontal GM Pad M10x1.25 7H13, 7H15, 7H15HD w/o Charging Ports	
Style QH  5624 Horizontal GM Pad Type SD508, 510 Compressor with PVT Port	Style QM  NOT AVAILABLE Horizontal GM Pad Type SD510HD Compressor	Style SJ  NOT AVAILABLE Horizontal Special Pad SD7H15 Compressor	Style UB  5629 Vertical Pad M10 x 1.23 Bolt SD508, 5H14 Compressor w/o Charging Ports	Style UD  5637 Horizontal Pad M10 x 1.25 Bolt SD5H14 Compressor w/o Charging Ports
Style UK  5639 Vertical Pad M10 x 1.25 Bolt SD7H15, 7H15HD Comp w/o Charging Ports	Style WH  NOT AVAILABLE Vertical Pad (Ford/Sterling) SD7H15 w/o charging port	Style WJ  NOT AVAILABLE Vertical Pad (Ford/Sterling) SD7H15 w/o charging port	Style WV  NOT AVAILABLE Horizontal Tab 3/4" x 7/8" SD7H15 Volvo with Pressure Relief Valve	Style 4418  NOT AVAILABLE Vertical Pad 7H15SHD

COMPRESSORS — SANDEN

Listed in ascended order by Sanden Number

SANDEN# NUMBER	AIRSOURCE COMPR	NUMBERS CLUTCH	HEAD	MODEL	HEAD	FITTING POS	SIZE	MOUNT	PULLEY DIA.mm	GRV	VOLT	WIRE END	SHAFT
4018	SD 4018	—	—	7H15HD	spc'l	VERT	PAD	DIR	126	PV10	12V	2MP	—
4019	SD 4019	—	—	SD7E	GH	HORIZ	PAD	DIR	119	PV6	12V	2MP	—
4020	SD 4020	—	—	SD7E	GH	HORIZ	PAD	DIR	119	PV8	12V	2MP	—
4021	SD 4021	—	—	SD7E	GK	HORIZ	34x7/8	DIR	119	PV8	12V	2	—
4024	SD 4024	NS	—	7H15SHDC	GQ	LATER'L	PAD	DIR	119	PV8	24V	2MP	—
4025	5322	NS	—	7H15SHDC	WH	VERT	PAD	DIR	119	PV8	12V	3FRD	—
4027	SD 4027	—	—	7H15HD	GV			DIR	125	PV6	12V	—	—
4028	SD 4028	—	—	7H15HD	GV			DIR	119	PV8	12V	—	—
4034	5306	—	—	SD7E FLX	GV	HORIZ	GM metric	DIR	119	PV10	12V	2MP	KEY
4039	5362	5164	—	7H15HD	GH	HORIZ	PAD	DIR	125	PV6	12V	2MP	KEY
4040	5366	5164	—	7H15HD	GQ	LATER'L	PAD	DIR	125	PV6	12V	2MP	KEY
4041	5373	5138	—	7H15HD	GQ	LATER'L	PAD	EAR	125	2	12V	2MP	KEY
4042	5365	5137	—		GQ	LATER'L	PAD	DIR	119	PV8	12V	2MP	KEY
4047	SD 4047	—	—	7H15HD	—	—	—	—	—	—	—	—	—
4051	SD 4051	—	—	SD7E FLX	GV	HORIZ	GM metric	DIR	126	PV12	24V	1	—
4052	SD 4052	—	—	SD7E FLX	GV	HORIZ	GM metric	DIR	125	2	24V	1	KEY
4066	SD 4066	—	—	SD7E FLX	GV	HORIZ	GM metric	DIR	119	PV8	24V	1	KEY
4070	SD 4070	—	—	7H15E	JDA			DIR	126	PV12	12V		
4083	SD 4083	—	—	7H15	WH	SPC'L	Spc'l Pad	DIR	119	PV8	12V	2MP	
4085	5387S	—	—	7H15SHDC	WV	SPC'L	Spc'l Pad	DIR	125	PV6	12V		
4087	SD 4087	—	—	7H15SHDC	GSA			DIR	126	PV7	12V	2MP	
4088	SD 4088	—	—	7H15SHDC	MDA			DIR	126	PV12	12V	2MP	
4269	5749A	—	—	7H15HD	KG	HORIZ	3/4x7/8	EAR	132	2	24V	1	KEY
4271	5752A	—	—	7H15HD	JD	VERT	3/4x7/8	EAR	132	2	24V	1P	KEY
4272	5412A	—	—	7H15	KG	HORIZ	3/4x7/8	EAR	132	2	12V	1	KEY
4300	5304	—	5632	7H15SHD	MD	HORIZ	1"-14	DIR LNG	152	PV8	24V	1P	KEY
4301	5316	5120	—	7H15SHD	GK	HORIZ	H-PAD	DIR LNG	132	PV8	24V	2CAT	KEY
4302	5318	—	—	7H15SHD	GK	HORIZ	H-PAD	DIR LNG	152	PV8	24V	2CAT	KEY
4303	5322	5174	—	7H15HD	WH	SPC'L	Spc'l Pad	DIR LNG	119	PV8	12V	2FRD	KEY
4304	5370E	—	—	SD7E	GH	SPC'L	Spc'l Pad	DIR LNG	125	PV6	12V	2FRD	KEY
4305	5323	5122	—	7H15HD	WJ	SPC'L	Spc'l Pad	EAR	119	PV8	12V	2FRD	KEY
4306	5394	5116	—	7H15	KCA	HORIZ	3/4x7/8	DIR LNG	132	2	12V	2MP	KEY
4307	5403	5137	—	7H15HD	WJ	VERT	PAD	DIR	119	PV8	12V	2MP	KEY
4308	SD 4308	—	—	7H15	GV			EAR		2	12V		
4314	5395	5137	—	7H15SHDC	spc'l	DIR	PAD	DIR	119	PV8	12V	2MP	KEY
4325	SD 4325	—	—	7H15HD	JD	VERT	3/4x7/8	DIR	132	2	24V	1P	KEY
4326	5404	NS	—	7H15SSHD	WV	HORIZ	PAD	DIR	180	PV8	12V	2MP	—
4342	5410	—	—	7H15				DIR	119	PV8	12V		
4347	5400	—	—	SD7E	spc'l	VERT	PAD	DIR	119	PV10	12V	2MP	—
4352	5333S	NS	—	7H15SHDC	GH	HORIZ	PAD	DIR	119	PV8	12V	2MP	—
4362	5710	—	—	7H15HD	—	—	—	DIR	119	7	12V	2	—
4368	5365S	NS	—	7H15SHDC	GQ	VERT	PAD	DIR	119	PV8	12V	2MP	—
4370	5402	NS	—	7H15SHD	GQ	LATER'L	PAD	DIR	126	PV12	12V	2MP	—
4376	5362S	NS	—	7H15SHDC	GSA	—	—	DIR	125	PV6	12V	2MP	—
4377	5366S	NS	—	7H15SHDC	GQ	LATER'L	PAD	DIR	125	PV6	12V	2MP	—
4378	SD 4378	NS	—	7H15SHDC	spc'l	VERT	PAD	DIR	126	PV12	12V	2MP	—
4379	SD 4379	NS	—	7H15SHDC	GSA	VERT	PAD	DIR	126	PV7	12V	2MP	—
4381	SD 4381	NS	—	7H15SHDC	MDA	HORIZ	1"-14	DIR	126	PV12	12V	2MP	—
4382	SD 4382	—	—	SD7E	GWA	HORIZ	PAD	DIR	119	PV6	12V	2MP	—
4383	5373	NS	—	7H15SHDC	GQ	LATER'L	PAD	EAR	125	2	12V	2MP	—
4384	SD 4384	NS	—	7H15SHD	GQ	LATER'L	PAD	DIR	126	PV10	12V	2MP	—
4391	5707S	NS	—	7H15SHDC	KCA	HORIZ	3/4x7/8	DIR	119	PV8	12V	2MP	—
4392	5363S	NS	—	7H15SHDC	JDA	VERT	3/4x7/8	EAR	125	2	12V	2MP	—
4397	5701	—	—	7H15	SJA			DIR	130	PV7	12V		
4396	5700	—	—	7H15	QC	—	—	DIR	—	PV7	12V	2	—
4398	5406	NS	—	7H15SHD	GSA	VERT	PAD	DIR	123	PV8	12V	2MP	—
4400	5409			7H15				DIR	120	PV8	12V		

NOTE: Refer notes and abbreviations on page 241.

SANDEN — COMPRESSORS

Listed in ascended order by Sanden Number (continued)

SANDEN# NUMBER	AIRSOURCE COMPR	NUMBERS CLUTCH	HEAD	MODEL	HEAD	FITTING POS	SIZE	MOUNT	PULLEY DIA.mm	GRV	VOLT	WIRE END	SHAFT
4401	5288E	-		SD7E FLX	GV	HORIZ	GM metric	DIR	125	2	12V	1B/P	-
4440	5887	-	5638G	7H15HD	KG	HORIZ	3/4x7/8	DIR	119	PV8	12V	2MP	KEY
4407	SD 4407	-	-	7H15SHD	spc'l	VERT	PAD	DIR	126	PV10	12V	2MP	KEY
4408	SD 4408	NS	-	7H15SHDC	GSA	VERT	PAD	EAR	125	PV6	12V	2MP	-
4410	SD 4410	NS	-	7H15SHDC	WJ	VERT	PAD	DIR	119	PV8	12V	2MP	-
4412	SD 4412	NS	-	7H15SHDC	MDA	HORIZ	1"-14	DIR	126	PV10	12V	2MP	-
4417	5333	5137	-	7H15HD	GH	HORIZ	H-PAD	DIR LNG	119	PV8	12V	2MP	KEY
4418	5393	5177	-	7H15	MJA	HORIZ	1"-14	DIR LNG	119	PV8	12V	2MP	KEY
4419	5288	5138	-	7H15-FLX	GV	HORIZ	GM metric	DIR LNG	125	2	12V	1B/P	KEY
4420	5285	5137	-	7H15-FLX	GV	HORIZ	GM metric	DIR LNG	119	PV8	12V	1B/P	KEY
4421	5331	5137	-	7H15HD	MDA	HORIZ	1"-14	DIR	119	PV8	12V	2MP	KEY
4422	5322	5174	-	7H15HD	WH	SPC'L	Spcl Pad	DIR LNG	119	PV8	12V	2FRD	KEY
4423	5370	4423-9931	-	7H15HD	-	SPC'L	Spcl Pad	DIR LNG	125	PV6	12V	2FRD	KEY
4424	5362	5164	-	7H15HD	-	VERT	PAD	DIR	125	PV6	12V	2MP	KEY
4425	5366	5164	-	7H15HD	GQ	LATER'L	3/4x7/8	DIR	125	PV6	12V	2MP	KEY
4426	5373	5138	-	7H15	GQ	LATER'L	3/4x7/8	EAR	125	2	12V	2MP	KEY
4427	5323	5122	-	7H15HD	WJ	SPC'L	Spcl Pad	EAR	119	PV8	12V	2FRD	KEY
4428	5394	5116	-	7H15	KCA	HORIZ	3/4x7/8	DIR LNG	132	2	12V	2MP	KEY
4429	5336	5116	-	7H15HD	GH	HORIZ	H-PAD	EAR	132	2	12V	2MP	KEY
4430	5334	5164	-	7H15HD	GH	HORIZ	H-PAD	DIR LNG	125	PV6	12V	2MP	KEY
4431	5326	5137	-	7H15HD	MDA	HORIZ	1"-14	EAR	119	PV8	12V	2MP	KEY
4432	5365	5137	-	7H15HD	GQ	LATER'L	3/4x7/8	DIR	119	PV8	12V	3MP	KEY
4433	5363	5138	-	7H15HD	JDA	VERT	3/4x7/8	EAR	125	2	12V	2MP	KEY
4434	5290	5116	-	7H15-FLX	GV	HORIZ	GM metric	EAR	132	2	12V	1B/P	KEY
4435	5291	4435-9931	-	7H15-FLX	GV	HORIZ	GM metric	EAR	132	2	24V	1B/P	KEY
4440	SD4440	-	-	7H15HD	GT	HORIZ	GM metric	DIR LNG	130	PV6	12V	2	KEY
4447	5190	-	-	FLX R12	GV	HORIZ	GM metric	EAR	132	2	12V		-
4448	5191	-	-	FLX R12	GV	HORIZ	GM metric	EAR	132	2	24V		-
4453	SD 4495	5068	-	7H15-FLX	GV	HORIZ	GM metric	EAR	119	PV8	12V	1	KEY
4457	5290A	5116	-	7H15-FLX	GV	HORIZ	GM metric	EAR	132	2	12V	1	KEY
4458	5290C	5116	-	7H15-FLX	GV	HORIZ	GM metric	EAR	133	2	12V	1	KEY
4459	5190A	-	-	FLX R12	GV	HORIZ	GM metric	EAR	132	2	12V	1	KEY
4460	5282A	5137	-	7H15-FLX	GV	HORIZ	GM metric	EAR	119	PV8	12V	1B/P	KEY
4467	5299	-	-	7H15HD	UK	SPC'L	Spcl Pad	EAR	128	PV6	12V		-
4468	5391	5119	-	7H15SHD	GK	HORIZ	H-PAD	EAR	138.5	1	24V	1CAT	KEY
4469	5771	5139	-	7H15HD	WJ	SPC'L	Spcl Pad	EAR	132	1	12V	2FRD	KEY
4471	5327	5116	-	7H15HD	MJA	HORIZ	1"-14	EAR	132	2	12V	2MP	KEY
4472	5336	5116	-	7H15HD	GH	HORIZ	H-PAD	EAR	132	2	12V	2MP	KEY
4473	5334	5164	-	7H15HD	GH	HORIZ	H-PAD	DIR LNG	125	PV6	12V	2MP	KEY
4474	5770	5122	-	7H15HD	WH	SPC'L	Spcl Pad	DIR LNG	119	PV8	12V	2FRD	KEY
4475	5330	5168(7) / 5164(8)		7H15	CBA	VERT	1"-14 PRV	DIR	125	PV6	12V	2MP	Spline
4477	5326	5137	-	7H15HD	MJA	HORIZ	1"-14	EAR	119	PV8	12V	2MP	KEY
4478	5300	-	5632	7H15SHD	MD	HORIZ	1"-14	EAR	152	2	12V	1	KEY
4479	5312	4640-9931	-	7H15SHD	GK	HORIZ	H-PAD	EAR	152	1	24V	2CAT	KEY
4480	5314	-	5638C	7H15SHD	KC	HORIZ	3/4x7/8	EAR	138.5	1	12V	2	KEY
4481	5347	-	-	7H15	GWS			DIR	125	PV6	12V		
4482	5331	5176(7) / 5137(8)		7H15	MJA	HORIZ	1"-14	DIR LNG	119	PV8	12V	2MP	KEY
4484	5363	5163	5601	7H15HD	JDA	VERT	3/4x7/8	EAR	125	2	12V	2MP	Spline
4485	5333	-	-	7H15	GH	HORIZ	H-PAD	DIR LNG	119	PV8	12V	2MP	KEY
4486	5322	5174	-	7H15HD	WH	SPC'L	Spcl Pad	DIR LNG	119	PV8	12V	2FRD	Spline
4487	5313	5120	-	7H15SHD	GK	HORIZ	H-PAD	EAR	133	PV8	24V	2CAT	KEY
4488	5328	5116	5601	7H15HD	JDA	VERT	3/4x7/8	EAR	132	2	12V	2MP	KEY
4489	5302	-	5632	7H15SHD	MD	HORIZ	1"-14	EAR	152	2	24V	1	KEY
4490	5383	5165	-	7H15	WV	HORIZ	3/4x7/8	EAR	130	PV8	12V	2MP	KEY
4491	5329	5116	5626	7H15HD	JD	VERT	3/4x7/8	DIR LNG	132	2	12V	2MP	KEY
4492	5345	5168(7) / 5164(8)		7H15HD	MDA	HORIZ	1"-14	DIR LNG	125	PV6	12V	2MP	Spline
4493	5385	5165	-	7H15	WV	HORIZ	3/4x7/8	DIR SHT	130	PV8	12V	2MP	KEY

NOTE: Refer notes and abbreviations on page 241.

COMPRESSORS — SANDEN

Listed in ascended order by Sanden Number (continued)

SANDEN# NUMBER	AIRSOURCE COMPR	NUMBERS CLUTCH	HEAD	MODEL	HEAD	FITTING POS	SIZE	MOUNT	PULLEY DIA.mm	GRV	VOLT	WIRE END	SHAFT
4494	5387	5168	—	7H15HD	WV	HORIZ	3/4x7/8	DIR LNG	125	PV6	12V	2MP	KEY
4495	SD 4495	5137	—	7H15HD	GV	HORIZ	GM metric	EAR	119	PV8	12V	2MP	KEY
4496	5323	5122	—	7H15HD	WJ	SPC'L	Spc'l Pad	EAR	119	PV8	12V	2FRD	KEY
4497	5320	—	—	7H15	SJ	SPC'L	Spc'l Pad	EAR	132	2	12V	2FRD	KEY
4498	5317	—	—	7H15SHD	KCA	HORIZ	3/4x7/8	DIR LNG	132	PV8	12V	2CAT	KEY
4499	5303	—	5632	7H15SHD	MD	HORIZ	1"-14	DIR LNG	152	PV8	12V	1P	KEY
4506	5774	5058	5625	5H14HD	FL	VERT	3/4x7/8	EAR	132	2	24V	1	KEY
4507	5774	5058	5625	5H14	FL	VERT	3/4x7/8	EAR	132	2	24V	1	KEY
4508	5712	5069	5625	5H14	FL	VERT	3/4x7/8	EAR	125	PV10	12V	1	KEY
4509	5785	5057	5625	5H14	FL	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
4510	5785	5057	5625	5H14HD	FL	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
4511	5719	5059	5634	5H14HD	C	VERT	1"-14	EAR	158	1VG	12V	1	KEY
4513	5703	5057	5631	5H14	M	HORIZ	1"-14	EAR	132	2	12V	1	KEY
4514	5737	5060	5625	5H14	FL	VERT	3/4x7/8	EAR	119	PV7	12V	1	KEY
4515	5715	5059	5625	5H14HD	FL	VERT	3/4x7/8	EAR	158	1VG	12V	1	KEY
4516	5775	6521-6210	5625	5H14HD	FL	VERT	3/4x7/8	EAR	158	1VG	24V	1	KEY
4519	5952	4877-9932	—	510SHD	QM	HORIZ	H PAD	EAR	138	1	24V	1	KEY
4521	5291 w/5204	—	—	5H14	M	HORIZ	1"-14	EAR	132	2	24V	—	—
4522	5284 w/5204	5060	—	5H14	M	HORIZ	1"-14	EAR	119	PV7	12V	1	KEY
4523	5284 w/5204	5060	—	5H14	M	HORIZ	1"-14	EAR	119	PV6	12V	1	KEY
4525	5290 w/5203	5057	—	5H14	C	VERT	1"-14	EAR	132	2	12V	—	KEY
4526	SD6670,4526	5069	5631	5H14	M	HORIZ	1"-14	EAR	125	PV10	12V	1	KEY
4527	5291 w/5203	5058	—	5H14HD	C	VERT	1"-14	EAR	132	2	24V	1	KEY
4529	5291 w/5203	5057	—	5H14HD	C	VERT	1"-14	EAR	132	2	12V	—	KEY
4530	5714	5061	5625	5H14HD	FL	VERT	3/4x7/8	EAR	122	1	12V	1	KEY
4531	5284 w/5204	5060	—	5H14	M	HORIZ	1"-14	EAR	119	PV7	12V	1	KEY
4532	5294 w/5201	—	—	5H14	FL	VERT	3/4x7/8	EAR	152	2	24V	—	—
4536	5730	5057	—	5H14HD	KG	HORIZ	3/4x7/8	EAR	132	2	12V	1P	KEY
4537	5731	5058	—	5H14HD	KG	HORIZ	3/4x7/8	EAR	132	2	24V	1	KEY
4538	SD 4538	5116	—	7H15HD	GH	HORIZ	PAD	DIR	132	2	12V	2MP	KEY
4540	SD 4540	5116	—	7H15HD	spc'l	VERT	PAD	DIR	132	2	12V	2MP	KEY
4541	SD 4541	—	—	7H15HD	spc'l	VERT	PAD	DIR	126	PV12	12V	2MP	KEY
4543	5396	NS	—	7H15SHDC	GH	HORIZ	PAD	DIR	140	PV8	12V	2MP	—
4544	5348	5137	—	7H15	GWA	HORIZ	PAD	DIR	119	PV8	12V	2MP	KEY
4545	SD 4545	—	—	SD7E	KF	HORIZ	1-1/16x3/4	DIR	119	PV8	12V	2	—
4546	5347	5164	—	7H15HD	GWA	HORIZ	PAD	DIR	125	PV6	12V	2MP	KEY
4547	5409	—	—	7H15	—	—	—	DIR	120	PV8	12V	—	—
4548	SD 4548	—	—	7H15	WH	VERT	PAD	DIR	119	PV8	12V	—	—
4549	5334S	NS	—	7H15SHDC	GH	HORIZ	PAD	DIR	125	PV6	12V	—	—
4600	SD 4600	—	5626	7H15SHD	JD	VERT	3/4x7/8	EAR	125	PV6	12V	1P	KEY
4602	5772	5121	—	7H15	WH	VERT	PAD (U)	DIR	169	1	12V	2FRD	KEY
46023	5772NC	—	—	7H15	WH	VERT	PAD	DIR	—	—	—	—	—
4603	5771	5139	—	7H15	WJ	SPC'L	3/4x7/8	EAR	132	2	12V	2FRD	KEY
46033	5771NC	—	—	7H15	WJ	HORIZ	PAD	EAR	—	—	—	—	—
4604	5391	5119	—	7H15SHD	GK	HORIZ	H-PAD	EAR	138.5	1	24V	1CAT	KEY
4608	5305	4875-9932	—	7H15SHD	GK	HORIZ	H-PAD	EAR	138	1	12V	1B/P	KEY
4609	5300	—	5632	7H15SHD	MD	HORIZ	1"-14	EAR	152	2	12V	1	KEY
4611	5302	4611-9931	5632	7H15SHD	MD	HORIZ	1"-14	EAR	152	2	24V	1P	KEY
4615	5395	5137	—	7H15HD	spc'l	VERT	PAD	DIR	119	PV8	12V	2MP	KEY
4616	5286E	—	—	SD7E FLX	GV	HORIZ	GM metric	EAR	125	2	12V	1B/P	KEY
4617	5717	—	5632	7H15SHD	MD	HORIZ	1"-14	EAR	152	2	12V	1	KEY
4618	5705	5149	—	7H15	SJA	HORIZ	Spc'l Pad	EAR	119	PV7	12V	2MP	KEY
4626	5726	5064	5626	7H15HD	JD	VERT	3/4x7/8	DIR	132	2	12V	1P	note3
4627	5727	5066	5626	7H15HD	JD	VERT	3/4x7/8	EAR	125	2	12V	1P	KEY
4628	5716	—	5626	7H15	JD	VERT	3/4x7/8	DIR	119	PV6	12V	1	KEY
4637	5740	—	5638C	7H15SHD	KC	HORIZ	3/4x7/8	EAR	133	PV8	12V	1P	KEY
4639	5764	5064	5626	7H15HD	JD	VERT	3/4x7/8	EAR	132	2	12V	1	KEY

NOTE: Refer notes and abbreviations on page 241.

SANDEN — COMPRESSORS

Listed in ascended order by Sanden Number (continued)

SANDEN# NUMBER	AIRSOURCE COMPR	NUMBERS CLUTCH	HEAD	MODEL	HEAD	FITTING POS	SIZE	MOUNT	PULLEY DIA.mm	GRV	VOLT	WIRE END	SHAFT
4640	5312	—	—	7H15SHD	GK	HORIZ	H-PAD	EAR	152	1	24V	2CAT	KEY
4641	5741	5068 (5)	5632	7H15	MD	HORIZ	1"-14	DIR	119	PV6	12V	1	KEY
4643	5725	5064	5627	7H15HD	CB	VERT	1"-14	EAR	132	2	12V	1P	KEY
4644	5764	5064	5601	7H15HD	JDA	VERT	3/4x7/8	EAR	132	2	12V	1P	KEY
4645	5745	5068 (5)	5601	7H15HD	JDA	VERT	3/4x7/8	EAR	119	PV7	12V	1P	KEY
4646	5746	5064	—	7H15HD	MJA	HORIZ	1"-14	EAR	132	2	12V	1	KEY
4647	5764	5064	5601	7H15HD	JDA	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
4652	5752	—	5626	7H15HD	JD	VERT	3/4x7/8	EAR	125	2	24V	1P	KEY
4653	SD 4653	—	5627	7H15	CB	VERT	1"-14	EAR	119	PV6	12V	2FRD	KEY
4654	SD 4654	—	5626	7H15SHD	JD	VERT	3/4x7/8	EAR	152	2	12V	1	KEY
4655	SD 4727	5065	5638C	7H15	KC	HORIZ	3/4x7/8	DIR	119	PV6	12V	1	KEY
4656	5391	5119	—	7H15	GK	HORIZ	3/4x7/8	EAR	138	1	24V	2CAT	KEY
4659	5708	4659-9931	5638C	7H15	KC	HORIZ	3/4x7/8	EAR	130	PV8	12V	1P	KEY
4660	5706	5068	5601	7H15	JDA	VERT	3/4x7/8	EAR	119	PV8	12V	1P	KEY
4661	5314	—	5638C	7H15SHD	KC	HORIZ	3/4x7/8	EAR	138	1	12V	2	KEY
4663	5727	5066	5626	7H15	JD	VERT	3/4x7/8	EAR	125	2	12V	1P	KEY
4664	5764	5064	5626	7H15HD	JD	VERT	3/4x7/8	EAR	132	2	12V	1P	KEY
4665	5745	5068 (5)	5626	7H15HD	JDA	VERT	3/4x7/8	EAR	119	PV7	12V	1P	KEY
4666	5707	5068	5638C	7H15	KC	HORIZ	3/4x7/8	DIR	119	PV8	12V	1P	KEY
4667	5707	5068	5638C	7H15	KC	HORIZ	3/4x7/8	DIR LNG	119	PV8	12V	1P	KEY
4672	5748	5068	—	7H15HD	MDA	HORIZ	1"-14	EAR	119	PV8	12V	1	KEY
4673	SD 4673	—	—	7H15SHD	KC		3/4x7/8	EAR	132	2	12V		
4676	SD 4676	—	—	SD7E	GWA	HORIZ	PAD	DIR	119	PV8	12V	2MP	-
4678	SD 4678	—	—	7H15	JDA			DIR	126	PV12	12V		
4685	SD 4727	5065	5638C	7H15	KC	HORIZ	3/4x7/8	DIR	119	PV6	12V	1	KEY
4687	5325	5164 (8)	—	7H15HD	CBA	VERT	1"-14 PRV	DIR	125	PV6	12V	1WP	KEY
4691	SD 4691	5065	—	7H15	GN	—	—	DIR	119	PV6	12V	1	KEY
4693	SD 4693	—	—	7H15	SJ				120	PV6	12V		
4694	5380	5116	5626	7H15HD	JD	VERT	3/4x7/8	EAR	132	2	12V	2MP	KEY
4695	5329	5116	5601	7H15HD	JDA	VERT	3/4x7/8	DIR	125	2	12V	2MP	KEY
4696	5373	5138	—	7H15	GQ	LATER'L	3/4x7/8	EAR	125	2	12V	2MP	KEY
4698	5321	—	—	7H15SHD	JD	VERT	3/4x7/8	DIR	133	PV8	12V	1WP	KEY
4699	5386	5116	5626	7H15HD	JD	VERT	3/4x7/8	DIR	132	2	12V	2MP	KEY
4700	5381	5165	5638C	7H15	KC	HORIZ	3/4x7/8	EAR	130	PV8	12V	2MP	KEY
4702	SD 4727	5065	5638C	7H15	KC	HORIZ	3/4x7/8	DIR	119	PV6	12V	1	KEY
4704	5320	—	—	7H15	SJ	SPC'L	SpC'l Pad	EAR	132	2	12V	2FRD	KEY
4705	5361	5137	—	7H15HD	GQ	LATER'L	3/4x7/8	EAR	119	PV8	12V	2MP	KEY
4707	5340	5068	—	7H15	QC	HORIZ	GM PAD	EAR	119	PV8	12V	1P	KEY
4708	5341	5066	—	7H15	QC	HORIZ	GM PAD	EAR	125	2	12V	1P	KEY
4709	5412	5066	5638G	7H15	KG	HORIZ	3/4x7/8	EAR	125	2	12V	1	KEY
4710	5413	5068	—	7H15	CB	VERT	1"-14	EAR	119	PV8	12V	1	KEY
4711	5706	5068	5626	7H15	JD	VERT	3/4x7/8	EAR	119	PV8	12V	1P	KEY
4712	5762	5068	5638G	7H15	KG	HORIZ	3/4x7/8	EAR	119	PV8	12V	1	KEY
4713	5363	5138	—	7H15HD	JDA	VERT	3/4x7/8	EAR	125	2	12V	2MP	KEY
4715	5382	5167(7) / 5116(8)	—	7H15	WV	HORIZ	3/4x7/8	DIR	132	2	12V	2MP	note 2
4716	5383	5165	—	7H15	WV	HORIZ	3/4x7/8	EAR	130	PV8	12V	2MP	KEY
4717	5384	5116	—	7H15	WV	HORIZ	3/4x7/8	EAR	132	2	12V	2MP	KEY
4718	5323	5122	—	7H15	WJ	HORIZ	SpC'l Pad	EAR	119	PV8	12V	2FRD	KEY
4720	SD 4720	—	—	SD7E	spc'l	VERT	PAD	DIR	119	PV8	12V	2MP	
4726	5313	5120	—	7H15SHD	GK	HORIZ	H-PAD	EAR	132	PV8	24V	2CAT	KEY
4727	SD 4727	—	5638C	7H15HD	KC	HORIZ	3/4x7/8	DIR	119	PV6	12V	—	—
4730	5770*	—	—	7H15	WH	VERT	PAD (U)	DIR	119	PV8	12V	2FRD	Spline
4731	5362	5168(7) / 5164 (8)	—	7H15HD	GSA	VERT	3/4x7/8	DIR	125	PV6	12V	2MP	Spline
4733	5385	5175	—	7H15	WV	HORIZ	3/4x7/8	DIR	130	PV8	12V	2MP	Spline
4734	5326	5137	—	7H15HD	MJA	HORIZ	1"-14	EAR	119	PV8	12V	2MP	KEY
4735	5327	5116	—	7H15HD	MJA	HORIZ	1"-14	EAR	132	2	12V	2MP	KEY
4736	5328	5116	5601	7H15HD	JDA	VERT	3/4x7/8	EAR	132	2	12V	2MP	KEY

NOTE: Refer notes and abbreviations on page 241.

COMPRESSORS — SANDEN

Listed in ascended order by Sanden Number (continued)

SANDEN# NUMBER	AIRSOURCE COMPR	NUMBERS CLUTCH	HEAD	MODEL	HEAD	FITTING POS	SIZE	MOUNT	PULLEY DIA.mm	GRV	VOLT	WIRE END	SHAFT
4738	SD 4738	—	—	7H15SHD	JD		3/4x7/8	EAR	133	PV8	12V		
4739	5367	5176(7) / 5137(8)	5638G	7H15HD	KG	HORIZ	3/4x7/8	EAR	119	PV8	12V	2MP	Spline
4740	5363	5163 (7) / 5138(8)	5601	7H15HD	JDA	VERT	3/4x7/8	EAR	125	2	12V	2MP	Spline
4741	5309	5132(8)	—	7H15HD	JD	VERT	PAD	EAR	125	2	24V	1	KEY
4742	5749	5132(8)	5638G	7H15HD	KG	HORIZ	3/4x7/8	EAR	125	2	24V	1	KEY
4743	5743	5132(8)	5627	7H15HD	CB	VERT	1"-14	EAR	125	2	24V	1	KEY
4744	5392	5132(8)	5632	7H15HD	MD	HORIZ	1"-14	EAR	125	2	24V	1	KEY
4745	5735	—	5626	7H15HD	JD	VERT	3/4x7/8	EAR	158	1VG	24V	1	KEY
4746	5736	—	5626	7H15HD	JD	VERT	3/4x7/8	EAR	158	1VG	12V	1	KEY
4747	5721	—	5627	7H15HD	CB	VERT	1"-14	EAR	158	1VG	12V	1	KEY
4752	5329	5116	5626	7H15HD	JD	VERT	3/4x7/8	DIR LNG	132	2	12V	2MP	KEY
4753	5355	—	—	7H15	SJ	VERT	PAD	EAR	119	PV8	12V	2FRD	—
4754	5701	—	—	7H15	SJA	VERT	PAD	DIR	130	7	12V	2	—
4756	5330	5168	—	7H15	CBA	VERT	1"-14 PRV	DIR LNG	125	PV6	12V	2MP	Spline
4757	5387	5168	—	7H15HD	WV	HORIZ	3/4x7/8	DIR	125	PV6	12V	2MP	Spline
4759	5365	5176(7) / 5137(8)	—	7H15HD	GQ	LATER'L	3/4x7/8	DIR	119	PV8	12V	2MP	Spline
4761	5345	5168	—	7H15HD	MDA	HORIZ	1"-14	DIR LNG	125	PV6	12V	2MP	Spline
4762	SD 4762	—	—	7H15HD	JD	VERT	3/4x7/8	EAR	123	PV8	24v	1	—
4763	5283 w/5203	—	—	7H15HD	CB	VERT	1"-14	EAR	119	PV8	24V	—	—
4764	5283 w/5204	—	—	7H15HD	MD	HORIZ	1"-14	EAR	119	PV8	24V	—	—
4765	5283 w/5202	5638G	—	7H15HD	KG	HORIZ	3/4x7/8	EAR	119	PV8	24V	—	—
4766	5356	—	—	7H15	SJ	SPC'L	Spc'l Pad	DIR SHT	119	PV8	12V	1FRD	—
4767	5322	—	—	7H15HD	WH	SPC'L	Spc'l Pad	DIR LNG	119	PV8	12V	2FRD	Spline
4768	5303	—	5632	7H15SHD	MD	HORIZ	1"-14	DIR LNG	152	PV8	12V	1P	KEY
4769	5316	5120	—	7H15SHD	GK	HORIZ	H-PAD	DIR LNG	132	PV8	24V	2CAT	KEY
4775	SD 4775	—	—	7H15	GH	HORIZ	PAD	DIR	119	PV8	12V	—	—
4776	5331	5176	—	7H15	MJA	HORIZ	1"-14	DIR LNG	119	PV8	12V	2MP	Spline
4777	5384	5167	—	7H15	WV	HORIZ	3/4x7/8	EAR	132	2	12V	2MP	Spline
4778	5382	5167(7) / 5116 (8)	—	7H15	WV	HORIZ	3/4x7/8	DIR	132	2	12V	2MP	note2
4779	5286 w/5201	—	—	7H15HD	JD	VERT	3/4x7/8	EAR	125	2	12V	1B/P	Spline
4780	5726	—	5626	7H15HD	JD	VERT	3/4x7/8	DIR	132	2	12V	1	Spline
4781	5332	—	5638C	7H15	KC	HORIZ	3/4x7/8	EAR	130	PV8	12V	1P	Spline
4785	SD 4785	—	—	7H15	GF	—	—	DIR	130	PV7	12V	2MP	—
4792	5366	5168(7) / 5164(8)	—	7H15	GQ	LATER'L	3/4x7/8	DIR	125	PV6	12V	2MP	Spline
4793	SD 4793	5164	—	7H15	GWA	—	—	DIR	125	PV6	12V	2MP	KEY
4795	5304	—	5632	7H15SHD	MD	HORIZ	1"-14	DIR LNG	152	PV8	24v	1P	KEY
4800	5285E	—	—	SD7E FLX	GV	HORIZ	GM metric	DIR	119	PV8	12V	1	—
4802	5398	NS	—	7H15SHDC	spc'l	VERT	PAD	DIR	140	PV8	12V	2MP	—
4803	SD 4803	—	—	7H15HD	spc'l	VERT	PAD	DIR	125	PV6	12V	2MP	—
4804	5399	NS	—	7H15SHDC	spc'l	VERT	PAD	DIR	126	PV10	12V	2MP	—
4805	5282E	—	—	SD7E FLX	GV	HORIZ	GM metric	EAR	119	PV8	12V	1	—
4808	5397	NS	—	7H15SHDC	MDA	HORIZ	1"-14	DIR	119	PV8	12V	2MP	—
4810	5370	4810-9931	—	7H15	WJ	SPC'L	Spc'l Pad	DIR LNG	125	PV6	12V	2FRD	Spline
4813	5317	—	—	7H15SHD	KCA	HORIZ	3/4x7/8	DIR LNG	132	PV8	12V	2CAT	KEY
4815	5347	5168	—	7H15	GWA	—	—	DIR	125	PV6	12V	2MP	Spline
4816	5348	5176(7) / 5137(8)	—	7H15	GWA	HORIZ	PAD	DIR	119	PV8	12V	2MP	Spline
4817	SD4817	—	—	7H15	MJA	HORIZ	1"-14	DIR LNG	119	PV8	12V	2FRD	KEY
4818	5333	5137	—	7H15	GH	HORIZ	H-PAD	DIR	119	PV8	12V	2MP	KEY
4819	5334	5164	—	7H15	GH	HORIZ	H-PAD	DIR LNG	125	PV6	12V	2MP	KEY
4820	5335	5137	—	7H15	GH	HORIZ	H-PAD	EAR	119	PV8	12V	2MP	KEY
4821	5336	5116	—	7H15	GH	HORIZ	H-PAD	EAR	132	2	12V	2MP	KEY
4822	5349	5137	5601	7H15	JDA	VERT	3/4x7/8	DIR	119	PV8	12V	2MP	KEY
4823	5390	5175	5638C	7H15	KC	HORIZ	3/4x7/8	DIR SHT	130	PV8	12V	1P	Spline
4825	SD 4825	—	—	7H15	GRA	VERT	PAD	SWING	130	PV6	12V	—	—
4840	5318	—	—	7H15SHD	GK	HORIZ	H-PAD	DIR LNG	152	PV8	24V	2CAT	KEY
4846	SD 4846	—	—	7H15	GF	—	—	DIR	130	PV7	12V	—	—
4848	5333	—	—	7H15	GH	HORIZ	H-PAD	DIR LNG	119	PV8	12V	2MP	KEY

NOTE: Refer notes and abbreviations on page 241.

SANDEN — COMPRESSORS

Listed in ascended order by Sanden Number (continued)

SANDEN# NUMBER	AIRSOURCE COMPR	NUMBERS CLUTCH	HEAD	MODEL	HEAD	FITTING POS	SIZE	MOUNT	PULLEY DIA.mm	GRV	VOLT	WIRE END	SHAFT
4854	SD 4854	—	—	7H15	GZA	—	—	SWING	130	PV6	12V	—	—
4860	5286	5138	—	7H15-FLX	GV	HORIZ	GM metric	EAR	125	2	12V	1B/P	KEY
4862	5287	—	—	7H15-FLX	GV	HORIZ	GM metric	EAR	125	2	24V	1B/P	KEY
4863	5187	—	—	FLX R12	GV	HORIZ	GM metric	EAR	125	2	24V	—	KEY
4864	5282	5137	—	7H15-FLX	GV	HORIZ	GM metric	EAR	119	PV8	12V	1B/P	KEY
4866	5283	4866-9931	—	7H15-FLX	GV	HORIZ	GM metric	EAR	119	PV8	24V	1B/P	KEY
4868	5295	5059	—	7H15-FLX	GV	HORIZ	GM metric	EAR	158	1VG	12V	1B/P	KEY
4869	5195	—	—	FLX R12	GV	HORIZ	GM metric	EAR	158	1VG	12V	—	KEY
4870	5296	—	—	7H15-FLX	GV	HORIZ	GM metric	EAR	158	1VG	24V	1B/P	KEY
4871	5196	—	—	FLX R12	GV	HORIZ	GM metric	EAR	158	1VG	24V	—	KEY
4872	5289	4872-9930	—	7H15-FLX	GV	HORIZ	GM metric	EAR	125	PV10	12V	1B/P	KEY
4873	5189	—	—	FLX R12	GV	HORIZ	GM metric	EAR	125	PV10	12V	—	KEY
4874	5284	4874-9933	—	7H15-FLX	GV	HORIZ	GM metric	EAR	119	PV8	12V	1B/P	KEY
4875	5305	4875-9932	—	7H15HD	GK	HORIZ	H-PAD	EAR	138	1	12V	1B/P	KEY
4877	5293	4877-9932	—	7H15-FLX	GV	HORIZ	H-PAD	EAR	138	1	24V	1B/P	KEY
4878	5193	—	—	FLX PAG	GV	HORIZ	GM metric	EAR	138	1	24V	—	KEY
4881	5294	4881-9930	—	7H15-FLX	GV	HORIZ	GM metric	EAR	152	2	24V	1B/P	KEY
4882	5194	—	—	FLX R12	GV	HORIZ	GM metric	EAR	152	2	24V	—	KEY
4883	5339	5164	5626	7H15	JD	VERT	3/4x7/8	DIR LNG	125	PV6	12V	2MP	KEY
4885	5371	5165	—	7H15	MJA	HORIZ	1"-14	DIR LNG	130	PV8	12V	2MP	KEY
4890	5382	5116	—	7H15	WV	HORIZ	3/4x7/8	DIR	132	2	12V	2MP	KEY
4891	5387	4891-9931	—	7H15	WV	HORIZ	3/4x7/8	DIR LNG	132	2	12V	2MP	—
4892	5385	4892-9931	—	7H15	WV	HORIZ	3/4x7/8	DIR SHT	130	PV8	12V	2MP	KEY
4893	5384	5116	—	7H15	WV	HORIZ	3/4x7/8	EAR	132	2	12V	2MP	KEY
4894	5332	5064 (7)	5626	7H15	JD	VERT	3/4x7/8	DIR	132	2	12V	1	KEY
4895	5332	4895-9931	5638C	7H15	KC	HORIZ	3/4x7/8	EAR	130	PV8	12V	1P	KEY
4896	5727	5066	5626	7H15	JD	VERT	3/4x7/8	EAR	125	2	12V	1P	KEY
4953	SD 4987	—	—	TRS090	—	Body Port	Body Port	BTD	109	PV4	12V	—	—
4969	SD 4969	—	—	TRS090	—	—	—	DIR	111	PV6	12V	—	—
4975	SD 4975	—	—	TRSA09	—	—	—	DIR	101	PV6	12V	—	—
4976	SD 4976	—	—	TRSA09	—	—	—	DIR	103	PV6	12V	—	—
4979	SD 4979	—	—	TRS105	—	—	—	DIR	95	PV7	12V	—	—
4987	SD 4987	—	—	TRS090	—	—	BodyPort	—	109	PV4	12V	—	—
5072	5786	—	5625	5H09	FL	VERT	3/4x7/8	EAR	125	2	12V	1	KEY
5073	5788	—	5625	5H09	FL	VERT	3/4x7/8	EAR	125	2	24V	1	KEY
5077	SD 5077	—	—	5H09	K	—	—	EAR	125	2	12V	1	KEY
5407	5974	5058	5621	508HD	FG	VERT	3/4x7/8	EAR	132	2	24V	1	KEY
5411	5911	5069	5631	508	M	HORIZ	1"-14	EAR	125	PV10	12V	—	KEY
5413	5191 w/5201	—	—	508	FG	VERT	3/4x7/8	EAR	132	2	24V	—	—
5415	5912	5069	5621	508	FG	VERT	3/4x7/8	EAR	125	PV10	12V	1	KEY
5424	5920	5057	5621	508	FG	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
5706	5906	5149	—	510HD	QH	HORIZ	PAD	EAR	119	PV7	12V	2FRD	KEY
57093	5773NC	—	—	510HD	FQ	VERT	3/4x7/8	EAR	—	—	—	—	KEY
5725	5920	5057	—	510HD	B	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
57303	5930NC	—	—	510HD	WF	VERT	PAD	EAR	—	—	—	—	KEY
5740	5902	5066	5632	709	MD	HORIZ	1"-14	EAR	125	2	12V	1	KEY
5746	5914	—	—	7H15HD	FG	VERT	3/4x7/8	EAR	122	1	12V	2FRD	KEY
5747	5975	5059	5621	510HD	FG	VERT	3/4x7/8	EAR	158	1VG	12V	1	KEY
6627	5774	5058	5625	5H14	FL	VERT	3/4x7/8	EAR	132	2	24V	1	KEY
6629	5737	5060	5625	5H14	FL	VERT	3/4x7/8	EAR	119	PV7	12V	1	KEY
6630	5290 w/5202	5057	—	5H14	K	HORIZ	3/4x7/8	EAR	132	2	12V	—	KEY
6631	5703	5057	5631	5H14	M	HORIZ	1"-14	EAR	132	2	12V	1	KEY
6632	5291 w/5204	5058	—	5H14	M	HORIZ	1"-14	EAR	132	2	24V	1	KEY
6634	5731	5058	5643	5H14	KG	HORIZ	3/4x7/8	EAR	132	2	24V	1	KEY
6642	5290 w/5203	5057	—	5H14	C	VERT	1"-14	EAR	132	2	12V	—	KEY
6655	5284 w/5204	5060	—	5H14	M	HORIZ	1"-14	EAR	119	PV7	12V	1	KEY
6656	5712	5069	—	5H14	FL	VERT	3/4x7/8	EAR	125	PV10	12V	1	KEY

NOTE: Refer notes and abbreviations on page 241.

COMPRESSORS — SANDEN

Listed in ascended order by Sanden Number (continued).

SANDEN# NUMBER	AIRSOURCE COMPR	NUMBERS CLUTCH	HEAD	MODEL	HEAD	FITTING POS	SIZE	MOUNT	PULLEY DIA.mm	GRV	VOLT	WIRE END	SHAFT
6664	5785	5057	5625	5H14	FL	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
6665	5774	5058	5625	5H14	FL	VERT	3/4x7/8	EAR	132	2	24V	1	KEY
6667	5291 w/5203	5058	—	5H14	C	VERT	1"-14	EAR	132	2	24V	1	KEY
6670	5289 w/5202	5069	—	5H14	M	HORIZ	1"-14	EAR	125	PV10	12V	1	KEY
6671	5719	5059	5634	5H14	C	VERT	1"-14	EAR	158	1VG	12V	1	KEY
6672	5775	—	5625	5H14	FL	VERT	3/4x7/8	EAR	158	1VG	24V	1	KEY
6673	5715	5059	5625	5H14	FL	VERT	3/4x7/8	EAR	158	1VG	12V	1	KEY
6674	5714	5061	5625	5H14	FL	VERT	3/4x7/8	EAR	122	1	12V	1	KEY
6675	5284 w/5204	5060	—	5H14	M	HORIZ	1"-14	EAR	119	PV6	12V	1	KEY
6676	5290 w/5202	5057	—	5H14	KG	HORIZ	3/4x7/8	EAR	132	2	12V	1P	KEY
6677	5290 w/5203	5057	—	5H14	C	VERT	1"-14	EAR	132	2	12V	—	KEY
6678	5290 w/5203	5057	—	5H14	C	VERT	1"-14	EAR	132	2	12V	—	KEY
6679	5294 w/5201	5625	—	5H14	FL	VERT	3/4x7/8	EAR	152	2	24V	—	—
6680	5291 w/5202	5058	—	5H14	K	HORIZ	3/4x7/8	EAR	132	2	24V	1	KEY
7170	SD 7170	—	—	7B10				SWING	115	2	12V		
7402	5902	5066	5632	709	MD	HORIZ	1"-14	EAR	125	2	12V	1	KEY
7409	5909	5066	5620	709	FC	VERT	3/4x7/8	EAR	125	2	12V	1	KEY
7416	5916	—	5620	709	FC	VERT	3/4x7/8	DIR	119	PV6	12V	1	KEY
7427	5182 w/5203	—	—	709	CB	VERT	1"-14	EAR	119	PV6	12V		—
7492	5182 w/5201	—	—	709	FC	VERT	3/4x7/8	EAR	119	PV8	12V		—
7501	5916	—	5620	709	FC	VERT	3/4x7/8	DIR	119	PV6	12V	1	KEY
7621	5186 w/5201	—	—	7H15	FC	VERT	3/4x7/8	EAR	125	2	12V		—
7712	5913	5065	5632	709	MD	HORIZ	1"-14	DIR	119	PV6	12V		KEY
7803	5704	5138	—	7H15	SJ	SPC'L	Spc'l Pad	EAR	125	2	12V	2MP	KEY
7804	5770	5122	—	7H15HD	WH	SPC'L	Spc'l Pad	DIR LNG	119	PV8	12V	2FRD	KEY
7819	5702	5066	5632	7H15	MD	HORIZ	1"-14	EAR	125	2	12V	1P	KEY
7822	5748	5068	5632	7H15	MD	HORIZ	1"-14	EAR	119	PV8	12V	1	KEY
7864	5284 w/5202	5065	—	7H15	—	—	EAR	119	PV6	12V	1	KEY	
8017	5287 w/5201	—	—	7H15	—	—	EAR	—	—	—	—	KEY	
8025	5284 w/5202	5065	—	7H15	—	—	EAR	119	PV6	12V	1	KEY	
8088	SD 8088	—	—	7H15HD	QC	HORIZ	—	EAR	140	2	12V	1	KEY
8103	5706	5068	5626	7H15	JD	VERT	3/4x7/8	EAR	119	PV8	12V	1	KEY
8104	5764	5064	5626	7H15HD	JD	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
8105	5716	—	5626	7H15	JD	VERT	3/4x7/8	DIR	119	PV6	12V	1	KEY
8107	5391	5119	—	7H15SHD	GK	HORIZ	H-PAD	EAR	138.5	1	24V	1CAT	KEY
8108	5305	4875-9932	—	7H15SHD	GK	HORIZ	3/4x7/8	EAR	138	1	12V	1	KEY
8109	5312	—	—	7H15SHD	GK	HORIZ	H-PAD	EAR	152	1	24V	2CAT	KEY
8114	5715	5059	5625	5H14HD	FL	VERT	3/4x7/8	EAR	158	1VG	12V	1	KEY
8390	5990	5057	—	508	B	VERT	FLARE	EAR	132	2	12V	1	KEY
8396	5194 w/5205	—	5628	508	B	VERT	FLARE	EAR	152	2	24V		—
8399	5999	5057	—	508	B	VERT	FLARE	EAR	132	2	24V	1	KEY
9005	5190 w/5203	—	—	508	C	VERT	1"-14	EAR	132	2	12V		—
9026	5926	5057	5631	508HD	M	HORIZ	1"-14	EAR	132	2	12V	1	KEY
9040	5190 w/5201	—	—	508	FG	VERT	3/4x7/8	EAR	132	2	12V		—
9056	5956	—	—	505	FL	VERT	FLARE	EAR	125	2	12V	1	KEY
9077	5788	—	—	505	E	VERT	FLARE	EAR	125	2	24V		—
9103	5903	5057	—	510HD	B	VERT	FLARE	EAR	132	2	12V	1	KEY
9105	5905	5058	—	510HD	B	VERT	FLARE	EAR	132	2	24V	1	KEY
9112	SD 9112	5059	—	510HD	B	VERT	3/4x7/8	EAR	152	B1	12V	1	KEY
9114	5925	5057	5634	510HD	C	VERT	1"-14	EAR	132	2	12V	1	KEY
9119	5919	5059	5634	510HD	C	VERT	1"-14	EAR	158	1VG	12V	1	KEY
9120	5920	5057	5621	510HD	FG	VERT	3/4x7/8	EAR	132	2	12V	1	KEY
9122	5922	—	5634	510HD	C	VERT	1"-14	EAR	158	1VG	24V	1	KEY
9125	5190 w/5204	—	—	510HD	M	HORIZ	1"-14	EAR	132	2	12V		—
9133	5191 w/5204	—	—	510HD	M	HORIZ	1"-14	EAR	132	2	24V		—
9137	5191 w/5203	—	—	510HD	C	VERT	1"-14	EAR	132	2	24V		—
9143	5191 w/5201	—	—	510HD	FG	VERT	3/4x7/8	EAR	132	2	24V		—

NOTE: Refer notes and abbreviations on page 241.

SANDEN — COMPRESSORS

Listed in ascended order by Sanden Number (continued).

SANDEN# NUMBER	AIRSOURCE NUMBERS COMPR CLUTCH HEAD	MODEL	HEAD	FITTING POS SIZE	MOUNT	PULLEY DIA.mm GRV	VOLT	WIRE END	SHAFT
9263	5190 w/5203 – –	508	N	VERT 1"-14	EAR	132 2	12V		–
9264	5190 w/5204 – –	508	M	HORIZ 1"-14	EAR	132 2	12V		–
9265	5191 w/5204 – –	508	M	HORIZ 1"-14	EAR	132 2	24V		–
9283	5182 w/5205 – –	508	B	VERT FLARE	EAR	119 PV7	12V		–
9285	5985 5057 5621	508	FG	VERT 3/4x7/8	EAR	132 2	12V	1	KEY
9505	5191 w/5203 – –	508HD	C	VERT 1"-14	EAR	132 2	24V		–
9513	5912 5069 –	508	B	VERT 3/4x7/8	EAR	125 PV10	12V	1	KEY
9514	5914 5148 5621	508HD	FG	VERT 3/4x7/8	EAR	122 1	12V	1	KEY
9515	5727 5057 5621	508HD	FG	VERT 3/4x7/8	EAR	132 2	12V	1	KEY
9537	5937 5060 5621	508	FG	VERT 3/4x7/8	EAR	119 PV7	12V	1	KEY
9540	5182 w/5204 – –	508	M	HORIZ 1"-14	EAR	119 PV6	12V		–
9546	5182 w/5203 – –	508	N	VERT 1"-14	EAR	119 PV6	12V		–
9548	5989 5057 –	510HD	QH	HORIZ PAD	EAR	132 2	12V	1	KEY
9563	5989 5057 –	508HD	QH	HORIZ H PAD	EAR	132 2	12V	1	KEY
9565	5182 w/5205 – –	508	B	VERT FLARE	EAR	119 PV6	12V		–
9570	5182 w/5204 – –	508	M	HORIZ 1"-14	EAR	119 PV7	12V		–
9583	5914 5148 5621	508HD	FG	VERT 3/4x7/8	EAR	122 1 OH	12V	1	KEY
9592	5992 5061 5631	508HD	M	HORIZ 1"-14	EAR	122 1	12V	1	KEY
9594	5995NC 5148 –	508	FQ	– –	EAR	122 1 OH	12V	2FRD	KEY
9669	5989 5057 –	508HD	QH	HORIZ PAD	EAR	132 2	12V	1	KEY
9674	5974 5058 5621	510HD	FG	VERT 3/4x7/8	EAR	132 2	24V	1	KEY
9675	5975 5059 5621	510HD	FG	VERT 3/4x7/8	EAR	158 1VG	12V	1	KEY
9676	5976 6521-6210 5621	510HD	FG	VERT 3/4x7/8	EAR	158 1VG	24V	1	KEY
9680	5919 5059 5634	510HD	C	VERT 1"-14	EAR	158 1VG	12V	1P	KEY
9684	5952 4877-9932 –	510HD	QM	HORIZ GM PAD	EAR	138 1	24V	1	KEY
9689	5989 5057 –	510HD	QF	HORIZ H PAD	EAR	132 2	12V	1	KEY
9694	5920 5057 –	510HD	FG	VERT 3/4x7/8	EAR	132 2	12V	1P	KEY
A7VC	5301 – 5632	7H15SHD	MD	HORIZ 1"-14	EAR	152 2	12V	1B	KEY
A9UL	5338 5165 –	7H15HD	MJA	HORIZ 1"-14	EAR	130 PV8	12V		KEY

Notes / Abbreviations:

- * OE Head has PRV, ours does not
- 1) Information — at current time
- 2) 4778 splined (4777-9931 clutch), 4715 keyed (4694-9931 clutch)
- 3) 4626 keyed (4626-9931 clutch), 4780 splined (4780-9931 clutch)
- 4) OE version 2wire Ford connector, Aftermarket is 1wire bullet
- 5) Use 8 groove clutch (5137)
- 6) Universal GM Pad used with manifold
- 7) Splined type clutch
- 8) Keyed type clutch

(–) DESIGNATES CALL FOR AVAILABILITY

DIR LNG = Direct Long; DIR SHT = Direct Short; PRV = Pressure Relief Valve

Abbreviations:

- 1 = single wire bullet connector
- 1B/P = single wire with FLX7 combination bullet/packard conn., can use with 1545 dual harness conn.
- 1P = single wire packard connector
- 1WP = single wire weatherpack connector
- 2CAT = two wire Cat. OE connector
- 2FRD = two wire Ford OE connector
- 2MP = two wire Metropack connector



Tech Tip: When replacing an R12 compressor with an R134a type you will need to do the following:

Since **ALL** R134a compressors do not contain service (schrader) ports needed to hook up manifold gauge hoses for servicing and charging, the additional purchase of R134a service ports are required. (The ports required are compressor specific, relating to the style of head where the A/C hoses are attached). Once the head style is determined, the ports simply are attached to the compressor fittings.

Super Heavy Duty Compressor (SHDC) New Design Features

- New Heavy Duty Design for greater durability and longer service life, twice as long as Standard Models
- Original Equipment on later model, class 8 vehicles: Freightliner, Peterbilt, Volvo and Mack
- Doubles the number of life clutch cycles (1 million)
- Increased Friction Surface Diameter on Clutch Rotor
- Same Wobble Plate design and performance as current SD7 compressors
- Larger Face with a friction lined clutch rotor for better engagement
- Rubber clutch armature replaces and eliminates leaf spring armature
- New Heavy Duty Extra Pure (EP) Steel Bearing in Clutch Rotor
- Increased internal oil flow passages to increase oil flow to lip seal
- Improved Over-Molded Lip Seal, increases the ability to seal when shaft “waggles” during compressor operation
- Improved rear thrust bearing race
- Improved Rod Swage Joint Quality with special alumite coating
- Thermal Fuse added to coil for disengagement of clutch pulley
- Prevents clutch from locking up and throwing accessory drive belt

In most applications, New Super Heavy Duty Compressors will replace the standard models. Check clutch clearance before installing on vehicle.



Standard Models

5333
5334
5362
5363
5365
5366




Super Heavy Duty Models

5333S
5334S
5362S
5363S
5365S
5366S

Super Heavy Duty Compressor (SHDC) Thermal Fuse Design

Thermal Fuse in Clutch Coil

- Placed inside the clutch coil to sensor high heat temperature.
- Function: As the fuse senses extreme heat from clutch slippage, the thermal fuse breaks open. With the open fuse, it will not allow the electrical current to flow to the clutch coil. This function disengages the clutch armature from the clutch pulley and allows the clutch pulley to spin freely acting as an idler pulley.
- The thermal fuse prevents the loss of the accessory drive belt.
- The thermal fuse can't be reset or replaced after breaking open. The compressor must be replaced and normal maintenance to the system must be performed.
- Position of Thermal Fuse is located in the Clutch Coil.

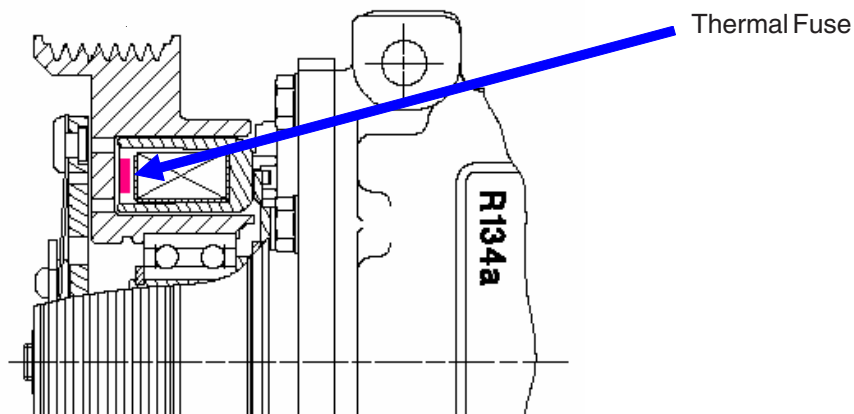

SD7E Enhanced Version Super Duty Compressors

- Wobble Plate design.
- HD Bus, Ag, & Off-Road Applications.
- Drop-in replacement for Seltec TM21 compressor.
- High-flow version of SD7. Comparable to 210cc performance.
- Same external dimensions as current SD7 compressor.
- Direct Mount. Various clutch pulley & Rear head configurations.
- Redesigned suction valve & increased ID Suction & Discharge ports.
- Conforms to existing dual compressor mounts.
- Approved for school bus usage nationwide.



COMPRESSORS — SANDEN STYLE

Listed in ascending order by part number.



5282A	200cc	R134a
Model	Mount	Clutch
FLX w/fitting	Ear	8gr 119mm
Volt	Head	Sanden#
12	GV	4460



5290A	200cc	R134a
Model	Mount	Clutch
FLX w/fitting	Ear	2gr 132mm
Volt	Head	Sanden#
12	GV	4457



5290C	200cc	R134a
Model	Mount	Clutch
FLX w/fitting	Ear	2gr 133mm
Volt	Head	Sanden#
12	GV	4458



5300	240cc	R134a
Model	Mount	Clutch
7H15SHD	Ear	2gr 152mm
Volt	Head	Sanden#
12	MD	4609



5302	285cc	R134a
Model	Mount	Clutch
7H15SHD	Ear	2 gr 152mm
Volt	Head	Sanden#
24	MD	4611



5303	300cc	R134a
Model	Mount	Clutch
7H15SHD	Direct	8gr 152mm
Volt	Head	Sanden#
12	MD	4768



5304	300cc	R134a
Model	Mount	Clutch
7H15SHD	Direct	8gr 152mm
Volt	Head	Sanden#
24	MD	4795



5305	300cc	R134a
Model	Mount	Clutch
7H15SHD	Ear	1gr 138mm
Volt	Head	Sanden#
12	GK	4608/8108



5306	300cc	R134a
Model	Mount	Clutch
FLX7E	Direct	10gr 119mm
Volt	Head	Sanden#
12	GV	4034



5307	240cc	R134a
Model	Mount	Clutch
7H15	Ear	6gr 119mm
Volt	Head	Sanden#
12	CB	4653



5308	190cc	R134a
Model	Mount	Clutch
7H15HD	Ear	2gr 140mm
Volt	Head	Sanden#
12	QC	8088



5309	175cc	R134a
Model	Mount	Clutch
7H15HD	Ear	2gr 125mm
Volt	Head	Sanden#
24	JD	4741




5312	300cc	R134a
Model	Mount	Clutch
7H15SHD	Ear	1gr 152mm
Volt	Head	Sanden#
24	GK	4640/8109



5313	300cc	R134a
Model	Mount	Clutch
7H15SHD	Ear	8gr 132 mm
Volt	Head	Sanden#
24	GK	4726



5314	240cc	R134a
Model	Mount	Clutch
7H15SHD	Ear	1gr 138mm
Volt	Head	Sanden#
12	KC	4661




SANDEN STYLE — COMPRESSORS

Listed in ascending order by part number (continued).

			
5316 300cc R134a	5317 300cc R134a	5318 300cc R134a	5320 300cc R134a
Model Mount Clutch	Model Mount Clutch	Model Mount Clutch	Model Mount Clutch
7H15SHD Direct 8gr 132mm	7H15SHD Direct 8gr 132mm	7H15SHD Direct 8gr 152mm	7H15 Ear 2gr 132mm
Volt Head Sanden#	Volt Head Sanden#	Volt Head Sanden#	Volt Head Sanden#
24 GK 4769	12 KCA 4813	24 GK 4840	12 SJ 4704/4497

			
5321 300cc	5322 300cc R134a	5323 300cc R134a	5325 240cc R134a
Model Mount Clutch	Model Mount Clutch	Model Mount Clutch	Model Mount Clutch
7H15SHD Direct 8gr 133mm	7H15HD Direct 8gr 119mm	7H15HD Ear 8gr 119mm	7H15HD Direct 6gr 125mm
Volt Head O.E.M.#	Volt Head Sanden#	Volt Head Sanden#	Volt Head Sanden#
12 JD 4698	12 WH 4767/4486	12 WJ 4305/4496/4718	12 CBA 4687

			
5326 300cc R134a	5327 240cc R134a	5328 300cc R134a	5329 300cc R134a
Model Mount Clutch	Model Mount Clutch	Model Mount Clutch	Model Mount Clutch
7H15HD Ear 8gr 119mm	7H15HD Ear 2gr 132mm	7H15HD Ear 2gr 132mm	7H15HD Direct 2gr 132mm
Volt Head Sanden#	Volt Head Sanden#	Volt Head Sanden#	Volt Head Sanden#
12 MJA 4734/4477	12 MJA 4735/4471	12 JDA 4736/4488	12 JD 4752/4491

			
5330 300cc R134a	5331 300cc R134a	5332 270cc R134a	
Model Mount Clutch	Model Mount Clutch	Model Mount Clutch	
7H15 Direct 6gr 125mm	7H15 Direct 8gr 119mm	7H15 Ear 8gr 130mm	
Volt Head Sanden#	Volt Head Sanden#	Volt Head Sanden#	
12 CBA 4756/4475	12 MJA 4776/4482	12 KC 4781	

COMPRESSORS — SANDEN STYLE

Listed in ascending order by part number (continued).



5333	300cc	R134a
Model	Mount	Clutch
7H15	Direct	8gr 119mm
Volt	Head	Sanden#
12	GH	4818/4485



5333S	300cc	R134a
Model	Mount	Clutch
7H15SHDC	Direct	8gr 119mm
Volt	Head	Sanden#
12	GH	4075/4352



5334	300cc	R134a
Model	Mount	Clutch
7H15	Direct	6gr 125mm
Volt	Head	Sanden#
12	GH	4819



5334S	300cc	R134a
Model	Mount	Clutch
7H15SHDC	Direct	6gr 125mm
Volt	Head	Sanden#
12	GH	4076/4549



5335	300cc	R134a
Model	Mount	Clutch
7H15	Ear	8 gr 119mm
Volt	Head	Sanden#
12	GH	4820



5336	300cc	R134a
Model	Mount	Clutch
7H15	Ear	2gr 132mm
Volt	Head	Sanden#
12	GH	4821



5339	300cc	R134a
Model	Mount	Clutch
7H15	Dir Lng	6gr 125mm
Volt	Head	Sanden#
12	JD	4883



5340	135cc	R134a
Model	Mount	Clutch
7H15	Ear	8gr 119mm
Volt	Head	Sanden#
12	QC	4707



5341	135cc	R134a
Model	Mount	Clutch
7H15	Ear	2gr 125mm
Volt	Head	Sanden#
12	QC	4708



5345	300cc	R134a
Model	Mount	Clutch
7H15HD	Direct	6gr 125mm
Volt	Head	Sanden#
12	MDA	4761/4492



5347	200cc	R134a
Model	Mount	Clutch
7H15	Direct	6gr 125mm
Volt	Head	Sanden#
12	GWA	4815



5348	200cc	R134a
Model	Mount	Clutch
7H15	Direct	8gr 119mm
Volt	Head	Sanden#
12	GWA	4816/4544



5349	300cc	R134a
Model	Mount	Clutch
7H15	Direct	8gr 119mm
Volt	Head	Sanden#
12	JDA	4822



5355	300cc	R134a
Model	Mount	Clutch
7H15	Ear	8gr 119mm
Volt	Head	Sanden#
12	SJ	4753




5356	300cc	R134a
Model	Mount	Clutch
7H15	Direct	8gr 119mm
Volt	Head	Sanden#
12	SJ	4766



5361	300cc	R134a
Model	Mount	Clutch
7H15HD	Ear	8gr 119mm
Volt	Head	Sanden#
12	GQ	4705

SANDEN STYLE — COMPRESSORS

Listed in ascending order by part number (continued).

																																																			
5362 200cc R134a	5362S 300cc R134a	5363 300cc R134a	5363S 300cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Direct</td><td>6gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GSA</td><td>4731</td></tr></table>	Model	Mount	Clutch	7H15HD	Direct	6gr 125mm	Volt	Head	Sanden#	12	GSA	4731	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHDC</td><td>Direct</td><td>6gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GSA</td><td>4079/4376</td></tr></table>	Model	Mount	Clutch	7H15SHDC	Direct	6gr 125mm	Volt	Head	Sanden#	12	GSA	4079/4376	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JDA</td><td>4740/4713/4484</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 125mm	Volt	Head	Sanden#	12	JDA	4740/4713/4484	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHDC</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JDA</td><td>4392</td></tr></table>	Model	Mount	Clutch	7H15SHDC	Ear	2gr 125mm	Volt	Head	Sanden#	12	JDA	4392
Model	Mount	Clutch																																																	
7H15HD	Direct	6gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	GSA	4731																																																	
Model	Mount	Clutch																																																	
7H15SHDC	Direct	6gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	GSA	4079/4376																																																	
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	JDA	4740/4713/4484																																																	
Model	Mount	Clutch																																																	
7H15SHDC	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	JDA	4392																																																	
																																																			
5365 200cc R134a	5365S 300cc R134a	5366 200cc R134a	5366S 300cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Direct</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GQ</td><td>4759</td></tr></table>	Model	Mount	Clutch	7H15HD	Direct	8gr 119mm	Volt	Head	Sanden#	12	GQ	4759	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHDC</td><td>Dir</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GQ</td><td>4077/4368</td></tr></table>	Model	Mount	Clutch	7H15SHDC	Dir	8gr 119mm	Volt	Head	Sanden#	12	GQ	4077/4368	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>6gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GQ</td><td>4792</td></tr></table>	Model	Mount	Clutch	7H15	Direct	6gr 125mm	Volt	Head	Sanden#	12	GQ	4792	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHDC</td><td>Dir</td><td>6gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GQ</td><td>4080/4377</td></tr></table>	Model	Mount	Clutch	7H15SHDC	Dir	6gr 125mm	Volt	Head	Sanden#	12	GQ	4080/4377
Model	Mount	Clutch																																																	
7H15HD	Direct	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	GQ	4759																																																	
Model	Mount	Clutch																																																	
7H15SHDC	Dir	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	GQ	4077/4368																																																	
Model	Mount	Clutch																																																	
7H15	Direct	6gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	GQ	4792																																																	
Model	Mount	Clutch																																																	
7H15SHDC	Dir	6gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	GQ	4080/4377																																																	
																																																			
5367 300cc R134a	5370 300cc R134a	5371 300cc R134a	5373 200cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>KG</td><td>4739</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	8gr 119mm	Volt	Head	Sanden#	12	KG	4739	5370E ... Enhanced Version <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>6gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>WJ</td><td>4810</td></tr></table>	Model	Mount	Clutch	7H15	Direct	6gr 125mm	Volt	Head	Sanden#	12	WJ	4810	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>8gr 130mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>MJA</td><td>4885</td></tr></table>	Model	Mount	Clutch	7H15	Direct	8gr 130mm	Volt	Head	Sanden#	12	MJA	4885	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GQ</td><td>4426/4696</td></tr></table>	Model	Mount	Clutch	7H15	Ear	2gr 125mm	Volt	Head	Sanden#	12	GQ	4426/4696
Model	Mount	Clutch																																																	
7H15HD	Ear	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	KG	4739																																																	
Model	Mount	Clutch																																																	
7H15	Direct	6gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	WJ	4810																																																	
Model	Mount	Clutch																																																	
7H15	Direct	8gr 130mm																																																	
Volt	Head	Sanden#																																																	
12	MJA	4885																																																	
Model	Mount	Clutch																																																	
7H15	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	GQ	4426/4696																																																	
																																																			
5380 300cc R134a	5381 300cc R134a	5382 300cc R134a																																																	
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JD</td><td>4694</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 132mm	Volt	Head	Sanden#	12	JD	4694	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>8gr 130mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>KC</td><td>4700</td></tr></table>	Model	Mount	Clutch	7H15	Ear	8gr 130mm	Volt	Head	Sanden#	12	KC	4700	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>WV</td><td>4715, 4778</td></tr></table>	Model	Mount	Clutch	7H15	Direct	2gr 132mm	Volt	Head	Sanden#	12	WV	4715, 4778													
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	JD	4694																																																	
Model	Mount	Clutch																																																	
7H15	Ear	8gr 130mm																																																	
Volt	Head	Sanden#																																																	
12	KC	4700																																																	
Model	Mount	Clutch																																																	
7H15	Direct	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	WV	4715, 4778																																																	

COMPRESSORS — SANDEN STYLE

Listed in ascending order by part number (continued).



5383	300cc	R134a
Model	Mount	Clutch
7H15	Ear	8gr 130mm
Volt	Head	Sanden#
12	WV	4490/4716



5384	300cc	R134a
Model	Mount	Clutch
7H15	Ear	2gr 132mm
Volt	Head	Sanden#
12	WV	4717/4777/4893



5385	300cc	R134a
Model	Mount	Clutch
7H15	Direct	8gr 130mm
Volt	Head	Sanden#
12	WV	4493/4733/4892



5386	300cc	R134a
Model	Mount	Clutch
7H15HD	Direct	2gr 132mm
Volt	Head	Sanden#
12	JD	4699



5387	300cc	R134a
Model	Mount	Clutch
7H15HD	Direct	6gr 125mm
Volt	Head	Sanden#
12	WV	4494/4757



5387S	300cc	R134a
Model	Mount	Clutch
7H15SHDC		6gr 125mm
Volt	Head	Sanden#
12	WV	4085



5390	300cc	R134a
Model	Mount	Clutch
7H15	Direct	8gr 130mm
Volt	Head	Sanden#
12	KC	4823



5391	300cc	R134a
Model	Mount	Clutch
7H15SHD	Ear	1gr 138.5mm
Volt	Head	Sanden#
24	GK	4468/4604/8107



5392	175cc	R134a
Model	Mount	Clutch
7H15HD	Ear	2gr 125mm
Volt	Head	Sanden#
24	MD	4744



5393	300cc	R134a
Model	Mount	Clutch
7H15	Direct	8gr 119mm
Volt	Head	Sanden#
12	MJA	4418



5394	300cc	R134a
Model	Mount	Clutch
7H15	Direct	2gr 132mm
Volt	Head	Sanden#
12	KCA	4306/4428



5395	300cc	R134a
Model	Mount	Clutch
SHDC	Direct	8gr 119mm
Volt	Head	Sanden#
12	PK	4314



5396	300cc	R134a
Model	Mount	Clutch
SHDC	Direct	8gr 140mm
Volt	Head	Sanden#
12	GH	4082/4543



5397	300cc	R134a
Model	Mount	Clutch
SHDC	Direct	8gr 119mm
Volt	Head	Sanden#
12	MDA	4084/4808



5398	300cc	R134a
Model	Mount	Clutch
SHDC	Direct	8gr 140mm
Volt	Head	Sanden#
12	Spcl	4802



5399	300cc	R134a
Model	Mount	Clutch
SHDC	Direct	10gr 126mm
Volt	Head	Sanden#
12	Spcl	4804

SANDEN STYLE — COMPRESSORS

Listed in ascending order by part number (continued).

			 Sealed Super Heavy Duty																																																
5400 300cc R134a	5402 240cc R134a	5403 300cc R134a	5404 300cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>SD7E</td><td>Direct</td><td>10gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>Spc'l</td><td>4347</td></tr></table>	Model	Mount	Clutch	SD7E	Direct	10gr 119mm	Volt	Head	Sanden#	12	Spc'l	4347	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHD</td><td>Direct</td><td>12gr 126mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GQ</td><td>4078/4370</td></tr></table>	Model	Mount	Clutch	7H15SHD	Direct	12gr 126mm	Volt	Head	Sanden#	12	GQ	4078/4370	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>WJ</td><td>4307</td></tr></table>	Model	Mount	Clutch	7H15	Direct	8gr 119mm	Volt	Head	Sanden#	12	WJ	4307	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SSHD</td><td>Direct</td><td>8gr 180mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>WV</td><td>4326</td></tr></table>	Model	Mount	Clutch	7H15SSHD	Direct	8gr 180mm	Volt	Head	Sanden#	12	WV	4326
Model	Mount	Clutch																																																	
SD7E	Direct	10gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	Spc'l	4347																																																	
Model	Mount	Clutch																																																	
7H15SHD	Direct	12gr 126mm																																																	
Volt	Head	Sanden#																																																	
12	GQ	4078/4370																																																	
Model	Mount	Clutch																																																	
7H15	Direct	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	WJ	4307																																																	
Model	Mount	Clutch																																																	
7H15SSHD	Direct	8gr 180mm																																																	
Volt	Head	Sanden#																																																	
12	WV	4326																																																	
																																																			
5406 300cc R134a	5409 74cc R134a	5410 75cc R134a	5412 135cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHD</td><td>Direct</td><td>8gr 123mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GSA</td><td>4081/4398</td></tr></table>	Model	Mount	Clutch	7H15SHD	Direct	8gr 123mm	Volt	Head	Sanden#	12	GSA	4081/4398	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>8gr 120mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>-</td><td>4400, 4547</td></tr></table>	Model	Mount	Clutch	7H15	Direct	8gr 120mm	Volt	Head	Sanden#	12	-	4400, 4547	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>-</td><td>4342</td></tr></table>	Model	Mount	Clutch	7H15	Direct	8gr 119mm	Volt	Head	Sanden#	12	-	4342	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>2gr125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>KG</td><td>4709</td></tr></table>	Model	Mount	Clutch	7H15	Ear	2gr125mm	Volt	Head	Sanden#	12	KG	4709
Model	Mount	Clutch																																																	
7H15SHD	Direct	8gr 123mm																																																	
Volt	Head	Sanden#																																																	
12	GSA	4081/4398																																																	
Model	Mount	Clutch																																																	
7H15	Direct	8gr 120mm																																																	
Volt	Head	Sanden#																																																	
12	-	4400, 4547																																																	
Model	Mount	Clutch																																																	
7H15	Direct	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	-	4342																																																	
Model	Mount	Clutch																																																	
7H15	Ear	2gr125mm																																																	
Volt	Head	Sanden#																																																	
12	KG	4709																																																	
		 Kodiak Topkick Diesel V6 / 7.8L																																																	
5412A 135cc R134a	5413 135cc R134a	5700 74cc R134a	5701 300cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>2gr132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>KG</td><td>4272</td></tr></table>	Model	Mount	Clutch	7H15	Ear	2gr132mm	Volt	Head	Sanden#	12	KG	4272	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>CB</td><td>4710</td></tr></table>	Model	Mount	Clutch	7H15	Ear	8gr 119mm	Volt	Head	Sanden#	12	CB	4710	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>7gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>QC</td><td>4396</td></tr></table>	Model	Mount	Clutch	7H15	Direct	7gr 119mm	Volt	Head	Sanden#	12	QC	4396	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>7gr 130mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>SJA</td><td>4397/4754</td></tr></table>	Model	Mount	Clutch	7H15	Direct	7gr 130mm	Volt	Head	Sanden#	12	SJA	4397/4754
Model	Mount	Clutch																																																	
7H15	Ear	2gr132mm																																																	
Volt	Head	Sanden#																																																	
12	KG	4272																																																	
Model	Mount	Clutch																																																	
7H15	Ear	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	CB	4710																																																	
Model	Mount	Clutch																																																	
7H15	Direct	7gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	QC	4396																																																	
Model	Mount	Clutch																																																	
7H15	Direct	7gr 130mm																																																	
Volt	Head	Sanden#																																																	
12	SJA	4397/4754																																																	
																																																			
5702 150cc R134a	5703 210cc R134a	5704 270cc R134a	5705 240cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GH</td><td>7819</td></tr></table>	Model	Mount	Clutch	7H15	Ear	2gr 125mm	Volt	Head	Sanden#	12	GH	7819	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>5H14</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>M</td><td>4513/6631</td></tr></table>	Model	Mount	Clutch	5H14	Ear	2gr 132mm	Volt	Head	Sanden#	12	M	4513/6631	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>SJ</td><td>7803</td></tr></table>	Model	Mount	Clutch	7H15	Ear	2gr 125mm	Volt	Head	Sanden#	12	SJ	7803	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>7gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>SJA</td><td>4618</td></tr></table>	Model	Mount	Clutch	7H15	Ear	7gr 119mm	Volt	Head	Sanden#	12	SJA	4618
Model	Mount	Clutch																																																	
7H15	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	GH	7819																																																	
Model	Mount	Clutch																																																	
5H14	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	M	4513/6631																																																	
Model	Mount	Clutch																																																	
7H15	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	SJ	7803																																																	
Model	Mount	Clutch																																																	
7H15	Ear	7gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	SJA	4618																																																	

COMPRESSORS — SANDEN STYLE

Listed in ascending order by part number (continued).

			
5706 270cc R134a Model Mount Clutch 7H15 Ear 8gr 119mm Volt Head Sanden# 12 JDA/JD 4660/4711/8103	5707 300cc R134a Model Mount Clutch 7H15 Direct 8gr 119mm Volt Head Sanden# 12 KC 4666/4667	5707S 300cc R134a Model Mount Clutch 7H15SHDC Direct 8gr 119mm Volt Head Sanden# 12 KCA 4391	5708 270cc R134a Model Mount Clutch 7H15 Ear 8gr 130mm Volt Head Sanden# 12 KC 4659
			
5709 135cc R134a Model Mount Clutch 7H15 Ear 2gr 125mm Volt Head Sanden# 12 JD 4663	5710 240cc R134a Model Mount Clutch 7H15HD Direct 7gr 119mm Volt Head Sanden# 12 - 4362	5712 135cc R134a Model Mount Clutch 5H14 Ear 10gr 125mm Volt Head Sanden# 12 FL 4508/6656	5714 135cc R134a Model Mount Clutch 5H14 Ear 1gr 122mm Volt Head Sanden# 12 FL 4530/6674
	FORD 		
5715 240cc R134a Model Mount Clutch 5H14HD Ear 1var 158mm Volt Head Sanden# 12 FL 4515/6673/8114	5716 240cc R134a Model Mount Clutch 7H15 Direct 6gr 119mm Volt Head Sanden# 12 JD 4628/8105	5717 300cc R134a Model Mount Clutch 7H15SHD Ear 2gr 152mm Volt Head Sanden# 12 MD 4617	5719 240cc R134a Model Mount Clutch 5H14HD Ear 1var 158mm Volt Head Sanden# 12 C 4511/6671
 Replaced by #5764 when stock is depleted			
5720 210cc R134a Model Mount Clutch 5H14HD Ear 2gr 132mm Volt Head Sanden# 12 FL 4510/6664	5721 175cc R134a Model Mount Clutch 7H15HD Ear 1var 158mm Volt Head Sanden# 12 CB 4747	5725 240cc R134a Model Mount Clutch 7H15HD Ear 2gr 132mm Volt Head Sanden# 12 CB 4643	5726 300cc R134a Model Mount Clutch 7H15HD Direct 2gr 132mm Volt Head Sanden# 12 JD 4626/4780

SANDEN STYLE — COMPRESSORS

Listed in ascending order by part number (continued).

	 Deplete stock and reorder 5412A	 Deplete stock and reorder 5749A																																																	
5727 300cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JD</td><td>4627</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 125mm	Volt	Head	Sanden#	12	JD	4627	5730 135cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>5H14</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>KG</td><td>4536/6676</td></tr></table>	Model	Mount	Clutch	5H14	Ear	2gr 132mm	Volt	Head	Sanden#	12	KG	4536/6676	5731 135cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>5H14</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>KG</td><td>4537/6634</td></tr></table>	Model	Mount	Clutch	5H14	Ear	2gr 132mm	Volt	Head	Sanden#	24	KG	4537/6634	5735 175cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>1var 158mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>JD</td><td>4745</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	1var 158mm	Volt	Head	Sanden#	24	JD	4745
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	JD	4627																																																	
Model	Mount	Clutch																																																	
5H14	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	KG	4536/6676																																																	
Model	Mount	Clutch																																																	
5H14	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
24	KG	4537/6634																																																	
Model	Mount	Clutch																																																	
7H15HD	Ear	1var 158mm																																																	
Volt	Head	Sanden#																																																	
24	JD	4745																																																	
																																																			
5736 240cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>1var 158mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JD</td><td>4746</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	1var 158mm	Volt	Head	Sanden#	12	JD	4746	5737 175cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>5H14</td><td>Ear</td><td>7gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FL</td><td>4514/6629</td></tr></table>	Model	Mount	Clutch	5H14	Ear	7gr 119mm	Volt	Head	Sanden#	12	FL	4514/6629	5740 270cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHD</td><td>Ear</td><td>8gr 133mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>KC</td><td>4637</td></tr></table>	Model	Mount	Clutch	7H15SHD	Ear	8gr 133mm	Volt	Head	Sanden#	12	KC	4637	5741 135cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>6gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>MD</td><td>4641</td></tr></table>	Model	Mount	Clutch	7H15	Direct	6gr 119mm	Volt	Head	Sanden#	12	MD	4641
Model	Mount	Clutch																																																	
7H15HD	Ear	1var 158mm																																																	
Volt	Head	Sanden#																																																	
12	JD	4746																																																	
Model	Mount	Clutch																																																	
5H14	Ear	7gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	FL	4514/6629																																																	
Model	Mount	Clutch																																																	
7H15SHD	Ear	8gr 133mm																																																	
Volt	Head	Sanden#																																																	
12	KC	4637																																																	
Model	Mount	Clutch																																																	
7H15	Direct	6gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	MD	4641																																																	
																																																			
5743 175cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>CB</td><td>4743</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 125mm	Volt	Head	Sanden#	24	CB	4743	5745 300cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>7gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JDA</td><td>4645/4665</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	7gr 119mm	Volt	Head	Sanden#	12	JDA	4645/4665	5746 240cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>MJA</td><td>4646</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 132mm	Volt	Head	Sanden#	12	MJA	4646	5748 240cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>MD</td><td>7822</td></tr></table>	Model	Mount	Clutch	7H15	Ear	8gr 119mm	Volt	Head	Sanden#	12	MD	7822
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
24	CB	4743																																																	
Model	Mount	Clutch																																																	
7H15HD	Ear	7gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	JDA	4645/4665																																																	
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	MJA	4646																																																	
Model	Mount	Clutch																																																	
7H15	Ear	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	MD	7822																																																	
																																																			
5749 175cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>KG</td><td>4742</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 125mm	Volt	Head	Sanden#	24	KG	4742	5749A 175cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>KG</td><td>4269</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 132mm	Volt	Head	Sanden#	24	KG	4269	5752 270cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>JD</td><td>4652</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 125mm	Volt	Head	Sanden#	24	JD	4652	5752A 270cc R134a <table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>JD</td><td>4271</td></tr></table>	Model	Mount	Clutch	7H15HD	Ear	2gr 132mm	Volt	Head	Sanden#	24	JD	4271
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
24	KG	4742																																																	
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
24	KG	4269																																																	
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
24	JD	4652																																																	
Model	Mount	Clutch																																																	
7H15HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
24	JD	4271																																																	

COMPRESSORS — SANDEN STYLE

Listed in ascending order by part number (continued).

COMPRESSORS




5762 300cc R134a

Model	Mount	Clutch
7H15	Ear	8gr 119mm
Volt	Head	Sanden#
12	KG	4712



5764 300cc R134a


Model	Mount	Clutch
7H15HD	Ear	2gr 132mm
Volt	Head	Sanden#
12	JDA/JD	4644/4664



FORD- see note 1 and 2

5770 w/ clutch 300cc
5770NC ... w/o clutch R134a


Model	Mount	Clutch
7H15HD	Direct	8gr 119mm
Volt	Head	Sanden#
12	WH	7804



FORD- see note 1 and 2

5771 w/ clutch 300cc
5771NC ... w/o clutch R134a

Model	Mount	Clutch
7H15	Ear	2gr 132mm
Volt	Head	Sanden#
12	WJ	4603



FORD- see note 1 and 2

5772 w/ clutch 300cc
5772NC ... w/o clutch R134a

Model	Mount	Clutch
7H15	Direct	1gr 169mm
Volt	Head	Sanden#
12	WH	4602



5773NC ... w/o clutch 310cc R134a

Model	Mount	Clutch
510HD	Ear	-
Volt	Head	Sanden#
-	FQ	57093



Deplete stock and reorder 5752A

5774 210cc R134a

Model	Mount	Clutch
5H14HD	Ear	2gr 132mm
Volt	Head	Sanden#
24	FL	4506/6665



5775 210cc R134a

Model	Mount	Clutch
5H14HD	Ear	1var 158mm
Volt	Head	Sanden#
24	FL	4516/6672



Replaced by #5764 when stock is depleted

5785 210cc R134a

Model	Mount	Clutch
5H14	Ear	2gr 132mm
Volt	Head	Sanden#
12	FL	4509



5786 100cc R134a

Model	Mount	Clutch
5H09	Ear	2gr 125mm
Volt	Head	Sanden#
12	FL	5072



5788 100cc R134a

Model	Mount	Clutch
5H09	Ear	2gr 125mm
Volt	Head	Sanden#
24	FL	5073



Limited Availability

5902 135cc R12

Model	Mount	Clutch
709	Ear	2gr 125mm
Volt	Head	Sanden#
12	MD	7402



5903 135cc R12

Model	Mount	Clutch
510HD	Ear	2gr 132mm
Volt	Head	Sanden#
12	B	9103



5905 135cc R12

Model	Mount	Clutch
510HD	Ear	2gr 132mm
Volt	Head	Sanden#
24	B	9105



(Includes Adapter #5599)

5906 175cc R12


Model	Mount	Clutch
510HD	Ear	7gr 119mm
Volt	Head	Sanden#
12	QH	5706

NOTE 1:
 5770, 5771, 5772
 Uses Grey Ford Connector
 (It attaches to the white one coming off the rear head.)

NOTE 2:
 5770NC, 5771NC, 5772NC
 Uses White Connector since it does not have a clutch.

SANDEN STYLE — COMPRESSORS

Listed In ascending order by part number (continued).

																																																			
Limited Availability																																																			
5909 135cc R12	5911 175cc R12	5912 240cc R12	5914 207cc R12																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>709</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FC</td><td>7409</td></tr></table>	Model	Mount	Clutch	709	Ear	2gr 125mm	Volt	Head	Sanden#	12	FC	7409	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508</td><td>Ear</td><td>10gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>M</td><td>5411</td></tr></table>	Model	Mount	Clutch	508	Ear	10gr 125mm	Volt	Head	Sanden#	12	M	5411	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508</td><td>Ear</td><td>10gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FG</td><td>5415</td></tr></table>	Model	Mount	Clutch	508	Ear	10gr 125mm	Volt	Head	Sanden#	12	FG	5415	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508HD</td><td>Ear</td><td>1gr 122mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FG</td><td>9514</td></tr></table>	Model	Mount	Clutch	508HD	Ear	1gr 122mm	Volt	Head	Sanden#	12	FG	9514
Model	Mount	Clutch																																																	
709	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	FC	7409																																																	
Model	Mount	Clutch																																																	
508	Ear	10gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	M	5411																																																	
Model	Mount	Clutch																																																	
508	Ear	10gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	FG	5415																																																	
Model	Mount	Clutch																																																	
508HD	Ear	1gr 122mm																																																	
Volt	Head	Sanden#																																																	
12	FG	9514																																																	
																																																			
Limited Availability																																																			
5916 240cc R12	5919 135cc R12	5920 175cc R12	5922 135cc R12																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>709</td><td>Direct</td><td>6gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FC</td><td>7416</td></tr></table>	Model	Mount	Clutch	709	Direct	6gr 119mm	Volt	Head	Sanden#	12	FC	7416	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>1var 158mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>C</td><td>9119</td></tr></table>	Model	Mount	Clutch	510HD	Ear	1var 158mm	Volt	Head	Sanden#	12	C	9119	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FG</td><td>9120</td></tr></table>	Model	Mount	Clutch	510HD	Ear	2gr 132mm	Volt	Head	Sanden#	12	FG	9120	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>1var 158mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>C</td><td>9122</td></tr></table>	Model	Mount	Clutch	510HD	Ear	1var 158mm	Volt	Head	Sanden#	24	C	9122
Model	Mount	Clutch																																																	
709	Direct	6gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	FC	7416																																																	
Model	Mount	Clutch																																																	
510HD	Ear	1var 158mm																																																	
Volt	Head	Sanden#																																																	
12	C	9119																																																	
Model	Mount	Clutch																																																	
510HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	FG	9120																																																	
Model	Mount	Clutch																																																	
510HD	Ear	1var 158mm																																																	
Volt	Head	Sanden#																																																	
24	C	9122																																																	
																																																			
5925 135cc R12	5926 210cc R12	5930NC ... w/o clutch 310cc R12	5937 175cc R12																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>C</td><td>9114</td></tr></table>	Model	Mount	Clutch	510HD	Ear	2gr 132mm	Volt	Head	Sanden#	12	C	9114	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>M</td><td>9026</td></tr></table>	Model	Mount	Clutch	508HD	Ear	2gr 132mm	Volt	Head	Sanden#	12	M	9026	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510</td><td>Ear</td><td>-</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>WF</td><td>57303</td></tr></table>	Model	Mount	Clutch	510	Ear	-	Volt	Head	Sanden#	12	WF	57303	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508</td><td>Ear</td><td>7gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FG</td><td>9537</td></tr></table>	Model	Mount	Clutch	508	Ear	7gr 119mm	Volt	Head	Sanden#	12	FG	9537
Model	Mount	Clutch																																																	
510HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	C	9114																																																	
Model	Mount	Clutch																																																	
508HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	M	9026																																																	
Model	Mount	Clutch																																																	
510	Ear	-																																																	
Volt	Head	Sanden#																																																	
12	WF	57303																																																	
Model	Mount	Clutch																																																	
508	Ear	7gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	FG	9537																																																	
																																																			
5952 240cc R12	5956 100cc R12	5973 175cc R12	5974 175cc R12																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510SHD</td><td>Ear</td><td>1gr 138mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>QM</td><td>4519</td></tr></table>	Model	Mount	Clutch	510SHD	Ear	1gr 138mm	Volt	Head	Sanden#	24	QM	4519	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>505</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FL</td><td>9056</td></tr></table>	Model	Mount	Clutch	505	Ear	2gr 125mm	Volt	Head	Sanden#	12	FL	9056	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>FG</td><td>5407</td></tr></table>	Model	Mount	Clutch	508HD	Ear	2gr 132mm	Volt	Head	Sanden#	24	FG	5407	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>FG</td><td>9674</td></tr></table>	Model	Mount	Clutch	510HD	Ear	2gr 132mm	Volt	Head	Sanden#	24	FG	9674
Model	Mount	Clutch																																																	
510SHD	Ear	1gr 138mm																																																	
Volt	Head	Sanden#																																																	
24	QM	4519																																																	
Model	Mount	Clutch																																																	
505	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	FL	9056																																																	
Model	Mount	Clutch																																																	
508HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
24	FG	5407																																																	
Model	Mount	Clutch																																																	
510HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
24	FG	9674																																																	

COMPRESSORS — SANDEN STYLE

Listed in ascending order by part number (continued).

																																																			
5975 135cc R12	5976 135cc R12	5985 175cc R12	5989 135cc R12																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>1var 158mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FG</td><td>9675</td></tr></table>	Model	Mount	Clutch	510HD	Ear	1var 158mm	Volt	Head	Sanden#	12	FG	9675	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>1var 158mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>FG</td><td>9676</td></tr></table>	Model	Mount	Clutch	510HD	Ear	1var 158mm	Volt	Head	Sanden#	24	FG	9676	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FG</td><td>9285</td></tr></table>	Model	Mount	Clutch	508	Ear	2gr 132mm	Volt	Head	Sanden#	12	FG	9285	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>510HD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>QF</td><td>9689</td></tr></table>	Model	Mount	Clutch	510HD	Ear	2gr 132mm	Volt	Head	Sanden#	12	QF	9689
Model	Mount	Clutch																																																	
510HD	Ear	1var 158mm																																																	
Volt	Head	Sanden#																																																	
12	FG	9675																																																	
Model	Mount	Clutch																																																	
510HD	Ear	1var 158mm																																																	
Volt	Head	Sanden#																																																	
24	FG	9676																																																	
Model	Mount	Clutch																																																	
508	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	FG	9285																																																	
Model	Mount	Clutch																																																	
510HD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	QF	9689																																																	
																																																			
5990 175cc R12	5992 240cc R12	5995NC ... w/o clutch R12	5999 175cc R12																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>B</td><td>8390</td></tr></table>	Model	Mount	Clutch	508	Ear	2gr 132mm	Volt	Head	Sanden#	12	B	8390	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508HD</td><td>Ear</td><td>1gr 122mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>M</td><td>9592</td></tr></table>	Model	Mount	Clutch	508HD	Ear	1gr 122mm	Volt	Head	Sanden#	12	M	9592	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508</td><td>Ear</td><td>-</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>FQ</td><td>95943</td></tr></table>	Model	Mount	Clutch	508	Ear	-	Volt	Head	Sanden#	12	FQ	95943	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>508</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>B</td><td>8399</td></tr></table>	Model	Mount	Clutch	508	Ear	2gr 132mm	Volt	Head	Sanden#	24	B	8399
Model	Mount	Clutch																																																	
508	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	B	8390																																																	
Model	Mount	Clutch																																																	
508HD	Ear	1gr 122mm																																																	
Volt	Head	Sanden#																																																	
12	M	9592																																																	
Model	Mount	Clutch																																																	
508	Ear	-																																																	
Volt	Head	Sanden#																																																	
12	FQ	95943																																																	
Model	Mount	Clutch																																																	
508	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
24	B	8399																																																	
																																																			
SD4027 2007 AUTOCAR REFUSE TRUCK R134a	SD4028 2007 AUTOCAR REFUSE TRUCK R134a	SD4052 300 cc R134a	SD4066 300cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Direct</td><td>6gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GV</td><td>4027</td></tr></table>	Model	Mount	Clutch	7H15HD	Direct	6gr 125mm	Volt	Head	Sanden#	12	GV	4027	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Direct</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GV</td><td>4028</td></tr></table>	Model	Mount	Clutch	7H15HD	Direct	8gr 119mm	Volt	Head	Sanden#	12	GV	4028	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15E</td><td>Direct</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GV</td><td>4052</td></tr></table>	Model	Mount	Clutch	7H15E	Direct	2gr 132mm	Volt	Head	Sanden#	12	GV	4052	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>SD7E</td><td>Direct</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>24</td><td>GV</td><td>4066</td></tr></table>	Model	Mount	Clutch	SD7E	Direct	8gr 119mm	Volt	Head	Sanden#	24	GV	4066
Model	Mount	Clutch																																																	
7H15HD	Direct	6gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	GV	4027																																																	
Model	Mount	Clutch																																																	
7H15HD	Direct	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	GV	4028																																																	
Model	Mount	Clutch																																																	
7H15E	Direct	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	GV	4052																																																	
Model	Mount	Clutch																																																	
SD7E	Direct	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
24	GV	4066																																																	
																																																			
SD4070 BUS CHASSIS w/ ENHANCED COMP. R134a	SD4083 NAVISTAR FREIGHTLINER 300cc R134a	SD4087 PACCAR R134a	SD4088 FREIGHTLINER R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15E</td><td>Direct</td><td>12gr 126mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JDA</td><td>4070</td></tr></table>	Model	Mount	Clutch	7H15E	Direct	12gr 126mm	Volt	Head	Sanden#	12	JDA	4070	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>WH</td><td>4083/4548</td></tr></table>	Model	Mount	Clutch	7H15	Direct	8gr 119mm	Volt	Head	Sanden#	12	WH	4083/4548	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>SHDC</td><td>Direct</td><td>7gr 126mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GSA</td><td>4379/4087</td></tr></table>	Model	Mount	Clutch	SHDC	Direct	7gr 126mm	Volt	Head	Sanden#	12	GSA	4379/4087	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>SHDC</td><td>Direct</td><td>12gr 126mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>MDA</td><td>4088</td></tr></table>	Model	Mount	Clutch	SHDC	Direct	12gr 126mm	Volt	Head	Sanden#	12	MDA	4088
Model	Mount	Clutch																																																	
7H15E	Direct	12gr 126mm																																																	
Volt	Head	Sanden#																																																	
12	JDA	4070																																																	
Model	Mount	Clutch																																																	
7H15	Direct	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	WH	4083/4548																																																	
Model	Mount	Clutch																																																	
SHDC	Direct	7gr 126mm																																																	
Volt	Head	Sanden#																																																	
12	GSA	4379/4087																																																	
Model	Mount	Clutch																																																	
SHDC	Direct	12gr 126mm																																																	
Volt	Head	Sanden#																																																	
12	MDA	4088																																																	

SANDEN STYLE — COMPRESSORS

Listed in ascending order by part number (continued).

																																																			
SD4308 135cc R134a	SD4384 300cc R134a	HT-6 Replacement SD4440 300cc R134a	NEW HOLLAND SD4673 270cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>SD7H15</td><td>Ear</td><td>2gr -mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GV</td><td>4308</td></tr></table>	Model	Mount	Clutch	SD7H15	Ear	2gr -mm	Volt	Head	Sanden#	12	GV	4308	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHD</td><td>Direct</td><td>10gr 126mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GQ</td><td>4384</td></tr></table>	Model	Mount	Clutch	7H15SHD	Direct	10gr 126mm	Volt	Head	Sanden#	12	GQ	4384	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15HD</td><td>Direct</td><td>6gr 130mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GT</td><td>4440</td></tr></table>	Model	Mount	Clutch	7H15HD	Direct	6gr 130mm	Volt	Head	Sanden#	12	GT	4440	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHD</td><td>Ear</td><td>2gr 132mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>KC</td><td>4673</td></tr></table>	Model	Mount	Clutch	7H15SHD	Ear	2gr 132mm	Volt	Head	Sanden#	12	KC	4673
Model	Mount	Clutch																																																	
SD7H15	Ear	2gr -mm																																																	
Volt	Head	Sanden#																																																	
12	GV	4308																																																	
Model	Mount	Clutch																																																	
7H15SHD	Direct	10gr 126mm																																																	
Volt	Head	Sanden#																																																	
12	GQ	4384																																																	
Model	Mount	Clutch																																																	
7H15HD	Direct	6gr 130mm																																																	
Volt	Head	Sanden#																																																	
12	GT	4440																																																	
Model	Mount	Clutch																																																	
7H15SHD	Ear	2gr 132mm																																																	
Volt	Head	Sanden#																																																	
12	KC	4673																																																	
																																																			
NAVISTAR w/CAT eng. R134a SD4678	SD4693 240cc R134a	CASE #9847944 R134a SD4738	SD4775 210cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>12gr 126mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JDA</td><td>4678</td></tr></table>	Model	Mount	Clutch	7H15	Direct	12gr 126mm	Volt	Head	Sanden#	12	JDA	4678	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>6gr 120mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>SJ</td><td>4693</td></tr></table>	Model	Mount	Clutch	7H15	Direct	6gr 120mm	Volt	Head	Sanden#	12	SJ	4693	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15SHD</td><td>Ear</td><td>8gr 133mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>JD</td><td>4738</td></tr></table>	Model	Mount	Clutch	7H15SHD	Ear	8gr 133mm	Volt	Head	Sanden#	12	JD	4738	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>8gr 119mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GH</td><td>4775</td></tr></table>	Model	Mount	Clutch	7H15	Direct	8gr 119mm	Volt	Head	Sanden#	12	GH	4775
Model	Mount	Clutch																																																	
7H15	Direct	12gr 126mm																																																	
Volt	Head	Sanden#																																																	
12	JDA	4678																																																	
Model	Mount	Clutch																																																	
7H15	Direct	6gr 120mm																																																	
Volt	Head	Sanden#																																																	
12	SJ	4693																																																	
Model	Mount	Clutch																																																	
7H15SHD	Ear	8gr 133mm																																																	
Volt	Head	Sanden#																																																	
12	JD	4738																																																	
Model	Mount	Clutch																																																	
7H15	Direct	8gr 119mm																																																	
Volt	Head	Sanden#																																																	
12	GH	4775																																																	
																																																			
SD4785 210cc R134a	SD4825 300cc R134a	SD5077 100cc R134a	SD7170 100cc R134a																																																
<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Direct</td><td>7gr 130mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GF</td><td>4785</td></tr></table>	Model	Mount	Clutch	7H15	Direct	7gr 130mm	Volt	Head	Sanden#	12	GF	4785	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7H15</td><td>Ear(swing)</td><td>6gr 130mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>GRA</td><td>4825</td></tr></table>	Model	Mount	Clutch	7H15	Ear(swing)	6gr 130mm	Volt	Head	Sanden#	12	GRA	4825	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>5H09</td><td>Ear</td><td>2gr 125mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>K</td><td>5077</td></tr></table>	Model	Mount	Clutch	5H09	Ear	2gr 125mm	Volt	Head	Sanden#	12	K	5077	<table><tr><th>Model</th><th>Mount</th><th>Clutch</th></tr><tr><td>7B10</td><td>Ear(swing)</td><td>2gr 115mm</td></tr><tr><th>Volt</th><th>Head</th><th>Sanden#</th></tr><tr><td>12</td><td>Spec'l</td><td>7170</td></tr></table>	Model	Mount	Clutch	7B10	Ear(swing)	2gr 115mm	Volt	Head	Sanden#	12	Spec'l	7170
Model	Mount	Clutch																																																	
7H15	Direct	7gr 130mm																																																	
Volt	Head	Sanden#																																																	
12	GF	4785																																																	
Model	Mount	Clutch																																																	
7H15	Ear(swing)	6gr 130mm																																																	
Volt	Head	Sanden#																																																	
12	GRA	4825																																																	
Model	Mount	Clutch																																																	
5H09	Ear	2gr 125mm																																																	
Volt	Head	Sanden#																																																	
12	K	5077																																																	
Model	Mount	Clutch																																																	
7B10	Ear(swing)	2gr 115mm																																																	
Volt	Head	Sanden#																																																	
12	Spec'l	7170																																																	

Sanden Compressors – Pressure Relief Valves (Also see Pressure Relief Valve Section)

5685
3/8"-24 (R12 & R134a)
Universal

5686
3/8"-24 Compressor Pop-Off Valve
for Sanden - Bleeds off at 500-600 p.s.i.

5686A
3/8"-24 Sanden New Style
Aluminum Low Profile w/HNBR O-ring.



COMPRESSORS — SANDEN (FLX7 Universal Style)

IMPORTANT: FLX7 Compressors are equipped with a GV style rear pad head - MANIFOLD REQUIRED.



1 GROOVE - EAR MOUNT

Diameter	Volt	Part#
138mm/5.50"	12v	5292
138mm/5.50"	24v	5293
158mm/6.25"	12v	5295
158mm/6.25"	24v	5296



2 GROOVE - EAR MOUNT

Diameter	Volt	Part#
125mm/4.9"	12v	5286 *1
125mm/4.9"	24v	5287
132mm/5.25"	12v	5290
132mm/5.25"	24v	5291
152mm/6.0"	24v	5294




2 GROOVE - DIRECT MOUNT

Diameter	Volt	Part#
125mm/4.9"	12v	5288 *2
132mm/5.25"	12v	5297



8 GROOVE - EAR MOUNT

Diameter	Volt	Part No.
119mm/4.6"	12v	5282 *3
119mm/4.6"	24v	5283
119mm/4.6"	12v	5284



8 & 10 GROOVE - DIRECT MOUNT

Diameter	Volt	Part#
119mm/4.6"	10 gr 12v	5285 *4
119mm/4.6"	8 gr 24v	SD4327 *5
119mm/4.6"	10 gr 12v	5306



10 GROOVE - EAR MOUNT

Diameter	Volt	Part#
125mm/4.9"	12v	5289
125mm/4.9"	24v	SD4309

*1 Can substitute **5286E** Enhanced Version

*2 Can substitute **5288E** Enhanced Version

*3 Can substitute **5282E** Enhanced Version

*4 Can substitute **5285E** Enhanced Version

*5 **SD 4327** Enhanced Version

MANIFOLD - REQUIRED (choose correct style for above compressors)

Made from forged steel.



5201
Vertical 3/4" x 7/8"



5202
Horizontal 3/4" x 7/8"



5203
Vertical 1"-14 Tube-O



5204
Horizontal 1"-14 Tube-O




5205
Vertical Flare

LEAD WIRE

Use when replacing clutch with 2 wires.

1545
Clutch Lead Wire

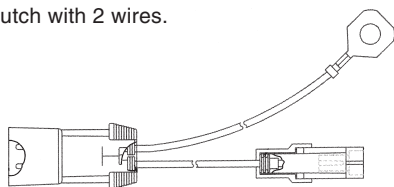

Compressor with Clutch

+ Plus Manifold

= Compressor Assembly



FLX7
(used #0121 o-rings)
GV Style Rear Pad Head

SANDEN FLX7 (R134a) — COMPRESSORS

TIPS FOR SANDEN FLX7 COMPRESSORS

1. FLX7 compressors can be used to replace most R12 and R134a Sanden and Seltec type models, due to their design which incorporates a pad style head using a bolt-on manifold. In some cases the manifold is not required (where the OE compressor is a pad style). The FLX7 compressor is available in 7 different clutch styles, in both 12 & 24 volt. Although the FLX7 is supplied with a single wire coil connection, a FLX7 wiring harness (1545) is available to convert the compressor to a double wire style.
2. If an application requires such, the FLX7 can be rotated 90° degrees left or right to properly “clock” the QV pad on the rear head (ear mount only). Just remember the oil plug must not be facing downward after it is rotated to its final position.
3. The FLX7 will outperform the SD508, SD510, and SD5H14 Sanden models, as well as Seltec models TM15, and TM16.
4. The overall length of the FLX7 compressor with an attached manifold may be longer than the OE compressor it will replace, especially if the original has a one piece aluminum rear head (non manifold type). In most cases the additional length will not present a problem. For extremely tight fit applications, check length before ordering.

Description:

FLX7 with Vertical Manifold 10 3/16” (overall length incl. clutch & manifold)

FLX7 with Horizontal Manifold 10 1/2” (overall length incl. clutch & manifold)

SUBSTITUTION CHART (NOT A DIRECT INTERCHANGE)

Sanden original equipment compressors interchange to FLX7 plus hose port manifolds

SANDEN Number	PART# “FLX7” +	Manifold Number	SANDEN Number	PART# “FLX7” +	Manifold Number	SANDEN Number	PART# “FLX7” +	Manifold Number	SANDEN Number	PART# “FLX7” +	Manifold Number
4428	5288	plus 5202	4665	5282	plus 5201	6671	5295	plus 5203	9103	5190	plus 5205
4501	5196	plus 5203	4666	5285	plus 5202	6672	5296	plus 5201	9105	5191	plus 5205
4502	5195	plus 5203	4706	5286	plus 5203	6673	5295	plus 5201	9108	5190	plus 5201
4506	5291	plus 5201	4707	5282	-	6675	5282	plus 5204	9114	5190	plus 5203
4507	5291	plus 5201	4708	5286	-	6676	5290	plus 5202	9119	5195	plus 5203
4508	5289	plus 5201	4709	5286	plus 5202	6677	5290	plus 5203	9120	5190	plus 5201
4509	5290	plus 5201	4710	5282	plus 5203	6678	5290	plus 5203	9122	5196	plus 5203
4510	5290	plus 5201	4711	5282	plus 5201	6679	5294	plus 5201	9125	5190	plus 5204
4511	5295	plus 5203	4712	5282	plus 5202	6680	5291	plus 5202	9133	5191	plus 5204
4513	5290	plus 5204	4741	5287	plus 5201	7401	5186	plus 5203	9137	5191	plus 5203
4514	5282	plus 5201	4742	5287	plus 5202	7402	5186	plus 5204	9143	5191	plus 5201
4515	5295	plus 5201	4743	5287	plus 5203	7409	5186	plus 5201	9263	5190	plus 5203
4516	5296	plus 5201	4744	5287	plus 5204	7427	5182	plus 5203	9264	5190	plus 5204
4517	5190	plus 5204	4745	5296	plus 5201	7492	5182	plus 5201	9265	5191	plus 5204
4518	5191	plus 5204	4746	5295	plus 5201	7621	5186	plus 5201	9279	5190	plus 5204
4519	5193	-	4747	5295	plus 5203	7819	5286	plus 5204	9283	5182	plus 5205
4521	5291	plus 5204	4762	5283	plus 5201	7822	5282	plus 5204	9285	5190	plus 5201
4522	5282	plus 5204	4763	5283	plus 5203	7824	5287	plus 5201	9505	5191	plus 5203
4523	5282	plus 5204	4764	5283	plus 5204	7825	5290	plus 5201	9513	5189	plus 5205
4525	5290	plus 5203	4765	5283	plus 5202	7862	5290	plus 5202	9515	5186	plus 5201
4526	5289	plus 5202	4779	5286	plus 5201	7864	5282	plus 5202	9519	5190	plus 5203
4527	5291	plus 5203	5407	5191	plus 5201	7865	5282	plus 5201	9537	5182	plus 5201
4529	5290	plus 5203	5411	5189	plus 5204	7866	5287	plus 5201	9540	5182	plus 5204
4532	5294	plus 5201	5413	5191	plus 5201	7867	5290	plus 5201	9546	5182	plus 5203
4536	5290	plus 5202	5415	5189	plus 5201	7877	5290	plus 5204	9563	5190	-
4537	5291	plus 5202	5425	5195	plus 5201	8017	5287	plus 5201	9565	5182	plus 5205
4604	5293	-	5754	5193	-	8018	5290	plus 5201	9570	5182	plus 5204
4608	5292	-	6626	5290	plus 5201	8019	5290	plus 5204	9589	5192	plus 5204
4626	5297	plus 5201	6627	5291	plus 5201	8023	5286	plus 5202	9663	5182	plus 5201
4626	5288	plus 5201	6629	5282	plus 5201	8025	5282	plus 5202	9672	5190	plus 5201
4627	5286	plus 5201	6630	5290	plus 5202	8026	5282	plus 5201	9674	5191	plus 5201
4637	5284	plus 5202	6631	5290	plus 5204	8061	5287	plus 5201	9675	5195	plus 5201
4641	5285	plus 5204	6632	5291	plus 5204	8062	5290	plus 5201	9676	5196	plus 5201
4643	5290	plus 5203	6634	5291	plus 5202	8103	5282	plus 5201	9685	5192	-
4646	5290	plus 5204	6642	5290	plus 5203	8104	5290	plus 5201	9689	5190	-
4647	5290	plus 5201	6655	5282	plus 5204	8390	5190	plus 5205			
4652	5287	plus 5201	6656	5289	plus 5204	8396	5194	plus 5205			
4656	5293	-	6664	5290	plus 5201	8399	5191	plus 5205			
4657	5292	-	6665	5291	plus 5201	9005	5190	plus 5203			
4663	5286	plus 5201	6667	5291	plus 5203	9026	5190	plus 5204			
4664	5290	plus 5201	6670	5289	plus 5202	9040	5190	plus 5201			

BENEFITS

- Reduced Part Numbers
- Reduced Inventory Costs
- Expanded Product Configurations

COMPRESSORS — SANDEN STYLE

**Dodge, Cadillac,
Chev / GMC Truck,
Oldsmobile**



“NEW” Sanden OEM replacement compressors for the following passenger and light truck applications!

MAKE	MODEL	ENGINE	DESCRIPTION	PART NO. #
DODGE				
2002 - 1995	Dakota	3.7L	PV7, 130mm Dia.	SD4785
2003 - 2001	Durango	4.7L (w/single evap)	PV6, 130mm Dia.	SD4825
DODGE PICKUP				
2003 - 1996	T-300 RAM	5.9L, 8.0L Diesel	PV8, 119 mm Dia.	SD4775
2002 - 1995	T-300 RAM	5.9L, 8.0L Gas	PV7, 130mm Dia.	SD4785
GM Passenger Car and Light Truck (Sanden NEW Compressor)				
USE to REPLACE Delphi HT-6 on the following GM vehicles)				
2000 - 1999	Cadillac Escalade	5.7L	PV6, 130mm Dia.	SD4440
1998 - 1996	Blazer, Jimmy	4.3L	PV6, 130mm Dia.	SD4440
1999 - 1996	C/K, Sierra 1500	4.3, 5.0, 5.7L	PV6, 130mm Dia.	SD4440
2000 - 1996	C/K, Sierra 2500,3500	5.0, 5.7L	PV6, 130mm Dia.	SD4440
1999 - 1996	Suburban 1500,2500	5.0, 5.7L	PV6, 130mm Dia.	SD4440
1999 - 1996	P30, 3500 Van	4.3, 5.7L	PV6, 130mm Dia.	SD4440
1998 - 1996	S10, Sonoma	4.3L	PV6, 130mm Dia.	SD4440
2000 - 1996	Tahoe, Yukon	5.7L	PV6, 130mm Dia.	SD4440
1998 - 1996	Oldsmobile Bravada	4.3L	PV6, 130mm Dia.	SD4440