

Basic Information

Receiver Driers, Accumulators and In-Line Filters are canisters used to filter debris and remove moisture to protect the a/c system. Various inlet and outlet fitting types and sizes are used. Many also have system protection devices, moisture indicators, charge ports, sight glass, fuse plugs, high pressure relief valves, mounting brackets depending on the requirements from the original equipment manufacturer.

Receiver Driers are usually located on the high side of the a/c system before the expansion valve. The receiver drier “receives” liquid refrigerant from the condenser, stores it, filters out contaminants from the a/c system, and removes moisture. A/C systems using a receiver drier use an expansion valve to control the refrigerant flow.

Accumulators are similar to that of the receiver drier. It is usually mounted on the low side, at the outlet of the evaporator. The accumulator “accumulates” or stores excess refrigerant, filters and dries the refrigerant. Accumulators are used on CCOT (Cycling Clutch Orifice Tube) or FFOT (Ford Fixed Orifice Tube) systems. These systems use an orifice tube instead of an expansion valve to control the refrigerant flow.

In-Line Filters are designed to be used in the liquid line in a/c systems with the orifice tube located in the evaporator. Placing the in-line filter “up stream” of the orifice eliminates the need to flush most systems, because the impurities are trapped before they reach the orifice tube. These filters are designed to hold up to 90 grams of debris, without a substantial penalty to the system’s flow. The screens and filter pads inside the canister, catch particles and filters the refrigerant oil.



RECEIVER DRIERS

RECEIVER DRIERS

ACCUMULATORS

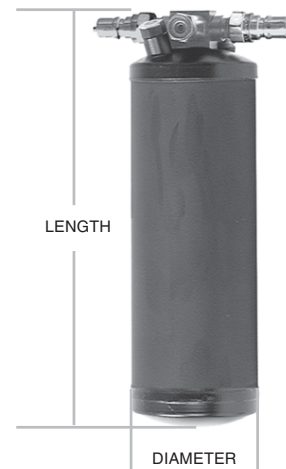
Specification Chart 406
 Visual Numerical Section 409

RECEIVER DRIERS

Specification Charts 400
 Barb Type (Push on) 405
 Block, Manifold, Pad or Slimline Type 400
 Flare Type 404
 In-Line Filters 404
 O-Ring Type 400
 Quick Disconnect Type 403
 Visual Numerical Section 409

NOTE Filter Drier manufacturers have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

DRIER MEASUREMENTS



Related Items

Moisture Indicators 408
 Mounting Bracket Kits 425
 O-Rings & Seals 390
 Quick Disconnect Fittings 408
 Typical Drier System 405
 Typical Accumulator System 407

RECEIVER DRIERS

Moisture can be harmful to air conditioning systems components and to the a/c system's operation. For this reason, any time the a/c system is opened, the receiver drier / accumulator needs to be replaced. A good preventative maintenance practice is to replace the receiver drier or the accumulator and orifice tube at regular intervals or at least once per year. When replacing a compressor, the a/c compressor manufacturer's warranty will be void without proof of flushing the system, and also replacement of the receiver drier.

Moisture Indicator - a litmus paper device which turns colors to designate condition of the refrigerant. Blue - Normal, Pink - Moisture in system, White - Very Wet, Grayish - oil contamination. Manufactures have discontinued using moisture indicators. We will supply until stock is exhausted.

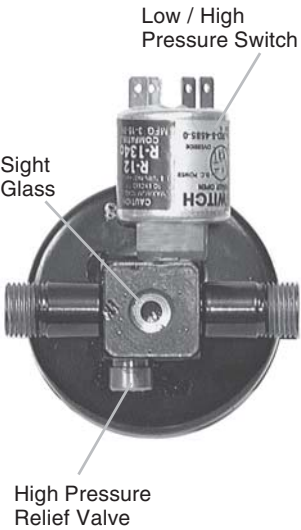
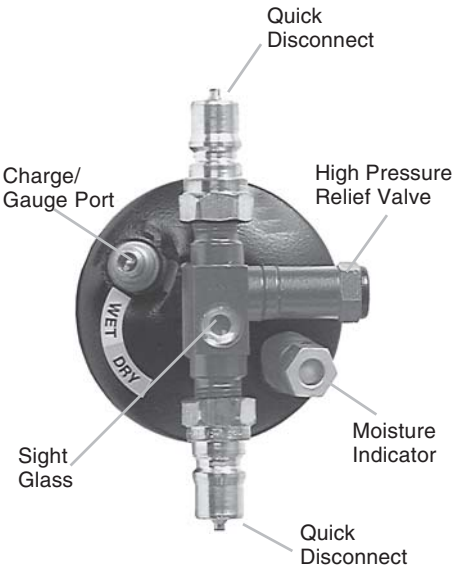
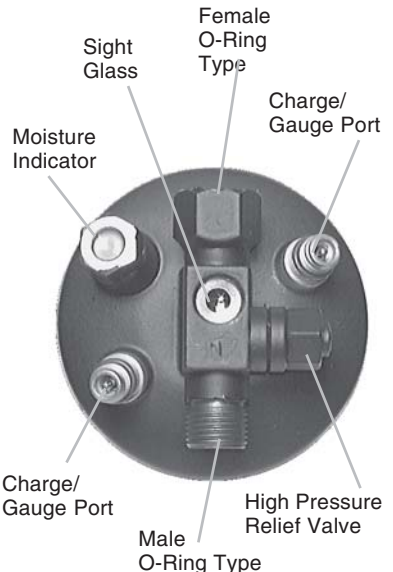

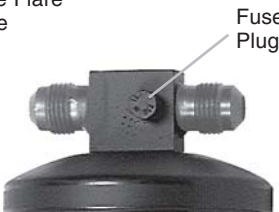




Pressure Relief Valve / Fuse Plug - A protection device designed to open and "bleed off" excessive pressure that may occur. The Fuse Plug is a bi-metal device which will "melt down" to release excess pressure.

Sightglass - a "window" for observing the condition of the refrigerant.

Schrader Valve - a gauge or charge port which allows access to the system, for charging or checking the pressures.

Switch Port - Low / High Pressure Switches - a switch port allows for a male or female pressure switch to be added to the drier. If low charge is detected, the low pressure switch opens electronically and stops the compressor operation. Similarly, as pressure increases, the high pressure switch will dis-engage the clutch and re-engage when pressure normalizes.

Typical Examples: Moisture indicator is not required and may not be supplied on drier.

| | | |
|---|--|---|
|  <p>Low / High Pressure Switch Sight Glass High Pressure Relief Valve</p> |  <p>Quick Disconnect Charge/Gauge Port High Pressure Relief Valve Sight Glass Moisture Indicator Quick Disconnect</p> |  <p>Sight Glass Female O-Ring Type Charge/Gauge Port Moisture Indicator Charge/Gauge Port Male O-Ring Type High Pressure Relief Valve</p> |
| <p>Slimline Manifold - Block Type</p>  | <p>Male Flare Type</p>  <p>Fuse Plug</p> | <p>Female Springlock Type</p>  |
| <p>Barb Type</p>  | <p>Male O-Ring Type</p>  <p>Female O-Ring Type</p> | <p>Male Springlock Type</p>  |

TECH TIP Metric Schrader Valve uses green o-ring seals.

RECEIVER DRIERS

Listed in ascending order by Diameter x Length by Fitting Type and Size

Pad Type, Block, SlimLine, Springlock or Manifold Style Fittings

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge R134a |
|---------|---------|------------------------|--------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|----------------------------|--------------|
| 1 5/8" | 11 5/8" | Pad Type | | 7557 | | | | | | | | Sprinter 680-013634AA | |
| 3" | 10" | SlimLine | | 7197 | | 2 M10 | | | | Top | | ABPN83-319744 | |
| 3" | 10 1/4" | SlimLine (#0126 seals) | | 7198 | | 2 M10 | | | Top | | | ABPN83-319534 | |
| 3" | 10 1/2" | Pad /Block | | 7545 | | 16mm | | | | | | Volvo OffRoad 11104567 | |
| 3" | 11" | Manifold Style | | 7393 | | | | | | | | Kenworth F37-6000 | |
| 3" | 14.35" | 3/8" #6 Springlock | | 7564 | | | | | | | | New Holland 89154-00 | |
| 3 7/16" | 9 1/2" | Pad Type | | 7415 | | | | | | | | Navistar 3542577C2 | |
| 4" | 7" | Block Style | | 7559 | | | | | | | | A22-63992-000; -001 | |
| 4" | 7" | Block Style | | 7566 | | | | | | | | A22-63994-001 | |
| 4" | 7" | Pad Type | | 7556 | | | | | | | | Sprinter 051-03570AA | |
| 4" | 7" | Pad Type | | 7561 | | | | | | | | Freightliner A22-63993-001 | |



Filter Drier manufacturers have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

RECEIVER DRIERS

2 1/2" Diameter - 3/8" Male O-Ring INLET

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|--------|---------|------------|-------------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|---------------------------|-----------|
| 2 1/2" | 5 1/8" | 3/8" #6 | FOR 3/8" #6 | 7181 | Top | | Bottom | | | | | Internal Fuse Plug | R12/R134a |
| 2 1/2" | 6" | 3/8" #6 | 3/8" #6 | 7532 | | | Side | | | | | 3/8" Port | R12/R134a |
| 2 1/2" | 6 5/16" | 3/8" #6 | Q.D. M12 | 7513 | Top | | Top | | | | | (1) Top M10; 33-0038A | R12/R134a |
| 2 1/2" | 6 5/16" | Q.D. M18 | Q.D. M12 | 7514 | Top | | Top | | | | | (1) Top M10; 33-0382A | R12/R134a |
| 2 1/2" | 6 5/16" | Q.D. M18 | Q.D. M18 | 7515 | Top | | Top | | | | | (1) Top M10; 33-0383A | R12/R134a |
| 2 1/2" | 6 5/16" | M18 | Q.D. Male | 7519 | | Top | | | | | | M10 Switch Port | R12/R134a |
| 2 1/2" | 6 5/16" | M18 | M18 | 7524 | | Top | | | | | | M10 Switch Port | R12/R134a |
| 2 1/2" | 6 5/8" | 3/8" Flare | 3/8" Flare | 7158 | Top | | Side | | | | | Male Flare | |
| 2 1/2" | 6 3/4" | 3/8" #6 | MOR 1/2" #8 | 7140 | | | | | | | | In-Line Design | R12/R134a |
| 2 1/2" | 6 3/4" | M18 | MOR M20 | 7503 | | | | | | | | In-Line Drier; 15982368 | R12/R134a |
| 2 1/2" | 7 1/2" | 3/8" #6 | 3/8" #6 | 7376 | | | | | | | | Single Bracket | R12/R134a |
| 2 1/2" | 8" | 3/8" #6 | 3/8" #6 | 7118 | Top | Top | | | | | | A22-14425-2 | R12/R134a |
| 2 1/2" | 8" | 3/8" #6 | 3/8" #6 | 7120 | Top | | | | | | Top | 7118, 1430 (3/8"-24 Male) | R12/R134a |
| 2 1/2" | 8" | 3/8" Male | QD | 7563 | | | | | | | | Motorhome 54-00011 | R134a |
| 2 1/2" | 8 1/4" | 3/8" #6 | 3/8" #6 | 7480 | Top | | | 1/4" Top | | | | Bracket | R12/R134a |
| 2 1/2" | 9 1/2" | 3/8" #6 | 3/8" #6 | 7207 | | | | | | | | Single Bracket | R12/R134a |
| 2 1/2" | 9 1/2" | 3/8" #6 | 3/8" #6 | 7219 | | | | | | | | Single Bracket | R12/R134a |
| 2 1/2" | 9 3/4" | 3/8" #6 | 3/8" #6 | 7360 | | | | | | | | Bracket w/Nuts | R12/R134a |
| 2 1/2" | 10" | 1/2" #8 | 1/2" #8 | 7502 | | | | | | | | | R12/R134a |

RECEIVER DRIERS

Listed in ascending order by Diameter x Length by Fitting Type and Size

2 3/4" Diameter - 3/8" Male O-Ring *INLET* x 3/8" Male O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|--------|--------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|----------------------------|-----------|
| 2 3/4" | 10" | 3/8" #6 | 3/8" #6 | 7154 | Top | | | | | Side | Side | | R12/R134a |
| 2 3/4" | 10" | 3/8" #6 | 3/8" #6 | 7155 | Top | | | 1/4" Side | | Side | | Mack 221RD328; 7156 + 8900 | R12/R134a |
| 2 3/4" | 10" | 3/8" #6 | 3/8" #6 | 7156 | Top | Side | | | | Side | | | R12/R134a |
| 2 3/4" | 10" | 3/8" #6 | 3/8" #6 | 7157 | Top | | | | | Side | | w/ Trinary Switch - Side | R12/R134a |
| 2 3/4" | 10" | 3/8" #6 | 3/8" #6 | 7388 | Side | Top | | | | Side | | Kenworth K251-263 | R12/R134a |
| 2 3/4" | 10" | 3/8" #6 | 3/8" #6 | 7389 | Side | | | Top | | | | 7388 + 8900 | R12/R134a |
| 2 3/4" | 10" | 3/8" #6 | 3/8" #6 | 7390 | Side | | | | | Side | | w/ Trinary Switch - Top | R12/R134a |

3" Diameter - 3/8" Male O-Ring *INLET* x 3/8" Male O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|------|---------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|---------------------------|-----------|
| 3" | 6" | 3/8" #6 | 3/8" #6 | 7125 | Top | Side | | | | Side | | | R12/R134a |
| 3" | 6 1/4" | 3/8" #6 | 3/8" #6 | 7124 | Top | | Side | | | | | | R12/R134a |
| 3" | 6 1/4" | 3/8" #6 | 3/8" #6 | 7129 | Top | | Side | | | | | | R12/R134a |
| 3" | 6 1/2" | 3/8" #6 | 3/8" #6 | 7123 | Top | Side | | | Top | Side | | | R12/R134a |
| 3" | 6 1/2" | 3/8" #6 | 3/8" #6 | 7126 | Top | | | 1/4" Side | | Side | | | R12/R134a |
| 3" | 6 1/2" | 3/8" #6 | 3/8" #6 | 7127 | Top | | Side | | | | | Binary (Side) | R12/R134a |
| 3" | 6 1/2" | 3/8" #6 | 3/8" #6 | 7128 | Top | | Side | | | | | Trinary (Side) | R12/R134a |
| 3" | 6 1/2" | 3/8" #6 | 3/8" #6 | 7555 | Top | | | | Top | Side | | RD5-9419-0 | R134a |
| 3" | 8" | 3/8" #6 | 3/8" #6 | 7161 | Top | | Side | (2) 1/4" | | | | (2) 1/4" Ports | R12/R134a |
| 3" | 8 1/4" | 3/8" #6 | 3/8" #6 | 7133 | Top | Top | | | Top | Side | | | R12/R134a |
| 3" | 8 1/4" | 3/8" #6 | 3/8" #6 | 7141 | Side | Top | | | | | | | R12/R134a |
| 3" | 8 1/4" | 3/8" #6 | 3/8" #6 | 7143 | Top | | Side | 1/4" Side | Top | | | | R12/R134a |
| 3" | 8 1/2" | 3/8" #6 | 3/8" #6 | 7229 | Top | Female | Side | Side | | Side | Side | Includes Low Press Switch | R12/R134a |
| 3" | 8 1/2" | 3/8" #6 | 3/8" #6 | 7180 | | | | Top (2) | | | | (2) M10 x 1.25mm | R12/R134a |
| 3" | 9" | 3/8" #6 | 3/8" #6 | 7159 | Top | | | 1/4" Top | Top | Side | | | R12/R134a |
| 3" | 9" | 3/8" #6 | 3/8" #6 | 7164 | Top | Side | | | Top | Side | | 1/8"-27NPT Port | R12/R134a |
| 3" | 9" | 3/8" #6 | 3/8" #6 | 7174 | | | | | Top | Side | | | R12/R134a |
| 3" | 9" | 3/8" #6 | 3/8" #6 | 7185 | | | | | Top | Top | | Inlet - Right Angle | R12/R134a |
| 3" | 9 3/4" | 3/8" #6 | 3/8" #6 | 7346 | Top | | | | | | | | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7193 | Top | | Top | 1/4" Side | | | | Wester Star | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7132 | Side | Top | | | Side | Side | | | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7134 | Top | Top | | | Top | Side | | | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7165 | Top | | | 1/4" Top | Top | Top | | | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7166 | Top | | | M10 Top | Top | Top | | M10 x 1.25mm | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7167 | Side | Top | Side | | Top | | | Mack Trk 221RD331 | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7175 | Side | | | | | | | | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7189 | Top | | | | Top | | | w/side mounting bracket | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7190 | Top | | | | Top | | | w/side mounting bracket | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7191 | Top | | | | | | | w/side & top mntg brkts | R12/R134a |
| 3" | 10 1/2" | 3/8" #6 | 3/8" #6 | 7171 | | | | (2) 1/4" | | | | (2) 1/4" Ports | R12 |

RECEIVER DRIERS

Listed in ascending order by Diameter x Length by Fitting Type and Size

3" Diameter - 3/8" Male O-Ring *INLET* x 3/8" Female O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|------|--------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|--------------------|-----------|
| 3" | 8" | 3/8" #6 | 3/8" #6 | 7135 | Top | | | (2) 1/4" | Top | Side | | | R12/R134a |
| 3" | 8" | 3/8" #6 | 3/8" #6 | 7170 | Top | | | (2) M10 | Top | Side | | (M10 x 1.25mm) | R12/R134a |
| 3" | 8 1/4" | 3/8" #6 | 3/8" #6 | 7172 | Top | | | (2) 1/4" | Top | Top | | Peterbilt 18-03638 | R12 |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7160 | Top | | | (2) 1/4" | Top | Side | | similar to #7135 | R12/R134a |
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7169 | Top | | | (2) M10 | | | | | R12/R134a |

3" Diameter - 3/8" Female O-Ring *INLET* x 3/8" Female O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|------|--------|-----------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|-------------------------------|-----------|
| 3" | 8 1/4" | 11/16" #6 | 3/8" #6 | 7107 | Top | | | | | | | alternate #7130; Kysor 402567 | R12/R134a |
| 3" | 10" | 11/16" #6 | 3/8" #6 | 7131 | Top | | Top | | Top | Side | | 7/16" Female Inlet | R12/R134a |
| 3" | 10" | 11/16" #6 | 3/8" #6 | 7130 | Top | | Top | | | | | alternate #7131 | R12/R134a |
| 3" | 10" | 11/16" #6 | 3/8" #6 | 7230 | Top | | | | | Top | | ParkerType; IHC 1693117C1 | R134a |

3" Diameter - 3/8" Female O-Ring *INLET* x 3/8" Male O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|------|--------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|------------------------------|-----------|
| 3" | 10" | 3/8" #6 | 3/8" #6 | 7387 | Side | | | | Top | | | K251-459, K251-571, K251-566 | R12/R134a |



Filter Drier manufacturers have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

4" Diameter - 3/8" Male O-Ring *INLET* x 3/8" Male O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|------|--------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|---------------------------|-----------|
| 4" | 5 1/4" | 3/8" #6 | 3/8" #6 | 7214 | Top | | Side | | | | | | R12/R134a |
| 4" | 6 1/2" | 3/8" #6 | 3/8" #6 | 7394 | Top | | Side | | | | | w/mounting bracket | R12/R134a |
| 4" | 6 3/4" | 3/8" #6 | 3/8" #6 | 7565 | Side | | | | | | | Volvo RD5-6075-0 | R134a |
| 4" | 7" | 3/8" #6 | 3/8" #6 | 7481 | | | Side | | | | | Ford Tractor E4NN-19825AA | R12/R134a |
| 4" | 7" | 3/8" #6 | 3/8" #6 | 7232 | Top | | Side | | | | | Opposite Side Inlet | R12/R134a |
| 4" | 7 3/4" | 3/8" #6 | 3/8" #6 | 7391 | Top | | | | Top | Side | Side | | R134a |
| 4" | 8 1/2" | 3/8" #6 | 3/8" #6 | 7234 | Top | | Side | | Top | | | | R12/R134a |

RECEIVER DRIERS

Listed in ascending order by Diameter x Length by Fitting Type and Size

4" Diameter - 3/8" Female O-Ring *INLET* x 3/8" Male O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|------|--------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|----------------------------|-----------|
| 4" | 7" | 3/8" #6 | 3/8" #6 | 7223 | Side | | Side | | | | | R12/R134a | |
| 4" | 7 1/2" | 3/8" #6 | 3/8" #6 | 7233 | (2) | | | | | | | | R12/R134a |
| 4" | 8 3/4" | 3/8" #6 | 3/8" #6 | 7392 | Side | | | | Top | | | JDDeere AT162848; AT151981 | R12/R134a |

4" Diameter - 3/8" Male O-Ring *INLET* x 3/8" Female O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|------|--------|----------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|---------------------|-----------|
| 4" | 7 1/2" | 5/8" -18 | 3/8" #6 | 7243 | (2) | | | | | | | John Deere RE491969 | R12/R134a |
| 4" | 7 3/4" | 3/8" #6 | 3/8" #6 | 7395 | | | | | | | | | R12/R134a |

4" Diameter - 3/8" Female O-Ring *INLET* x 3/8" Female O-Ring *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Note | Charge |
|------|--------|------------|------------|-------------|-------------|-------------|-----------|----------------|--------------------|---------------------------|-----------|
| 4" | 9" | 3/8"FOR #6 | 3/8"FOR #6 | 7396 | | | | | | Ford Tractor E2NN-19825AA | R12/R134a |

Quick Disconnect Type

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|--------|---------|-----------|--------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|----------------------------------|-----------|
| 2 1/2" | 6" | QD | QD | 7173 | | | | | | | | In-Line Drier; Peterbilt 18-3841 | R134a |
| 2 1/2" | 6" | QD | QD | 7176 | Top | | | (1) M10 | | | | (1) M10 x 1.25mm - Top | R12/R134a |
| 2 1/2" | 6 5/16" | 3/8" #6 | QD | 7513 | Top | | | (1) M10 | | | | (1) Top M10 Male | R12/R134a |
| 2 1/2" | 6 5/16" | M18 QD | QD | 7514 | Top | | | (1) M10 | | | | (1) M10; 33-0382A | R12/R134a |
| 2 1/2" | 6 5/16" | M18 QD | M18 QD | 7515 | Top | | | (1) M10 | | | | (1) M10; 33-0383A | R12/R134a |
| 2 1/2" | 7 3/4" | QD | QD | 7145 | Side | | | | | | | Encl. Orifice Tube 13.88" OAL | R134a |
| 2 1/2" | 8" | 3/8" Male | QD | 7563 | | | | | | | | Motorhome 54-00011 | R134a |
| 3" | 9 5/8" | QD | QD | 7199 | Top | | | (2) M10 | | | | ABP N83 319524; 088470-01 | R134a |
| 3" | 10" | QD | QD | 7163 | Top | | | (2) 1/4" | Top | | | 2 Schrader Vlvs (1/4" Top) | R134a |
| 3" | 10" | QD | QD | 7168 | Top | | | (2) M10 | Top | | | (2) M10 x 1.25mm (Top) | R134a |
| 3" | 10" | QD | QD | 7179 | Top | | | 16mm | Top | Side | | R134a Service Port | R134a |
| 3" | 10" | QD | QD | 7386 | Side | | | | Top | | | | R134a |
| 4" | 8 1/2" | QD | QD | 7236 | Top | | | | Top | Side | Side | | R134a |

RECEIVER DRIERS

Listed in ascending order by Diameter x Length by Fitting Type and Size
In-Line Filters / Driers

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Moisture Indicator | Note | Charge |
|---------|----------|-----------------------|----------------------|-------------|-------------|--------------------|------------------------------------|-----------|
| 1 3/4" | 20 1/4" | 3/8" #6 Male Flare | 3/8" #6 Male Flare | 7142 | Side | | In-Line Design | R12 |
| 2 3/4" | 8 1/2" | 1/2" #8 Male O-ring | 1/2" #8 Male O-ring | 7541 | | Side | Carrier# 14-00288-00 | R134a |
| 2 3/4" | 8 1/2" | 1/2" #8 Flare O-ring | 1/2" #8 Flare O-ring | 7542 | | Side | WSG164FO | R134a |
| 2 7/16" | 2 11/16" | #6 Compression | #6 Compression | 7530 | | | In-Line Filter | R12/R134a |
| 2 7/16" | 2 11/16" | #8 Compression | #8 Compression | 7531 | | | In-Line Filter | R12/R134a |
| 2 7/16" | 3" | #8 Male Insert O-ring | #8 Female O-ring | 7527 | | | In-Line Filter | R12/R134a |
| 2 7/16" | 5" | #8 Male Springlock | #8 Female Springlock | 7526 | | | In-Line Filter | R12/R134a |
| 2 7/16" | 5" | #6 Male Springlock | #6 Female Springlock | 7525 | | | In-Line Orifice Filter Kit | R12/R134a |
| 2 1/2" | 6" | QD | QD | 7173 | | | In-Line Drier; Peterbilt 18-3841 | R134a |
| 2 1/2" | 6 3/4" | 3/8" #6 Male O-ring | 1/2" #8 Male O-ring | 7140 | | | In-Line Design | R12/R134a |
| 2 1/2" | 6 3/4" | M18 Male O-ring | M20 Male O-ring | 7503 | | | In-Line Drier; GMC 15982368 | R12/R134a |
| 2 1/2" | 7" | 1/2" #8 Male Flare | 1/2" #8 Male Flare | 7500 | | | In-Line Drier; WAH164FO | R12/R134a |
| 2 1/2" | 7" | 1/2" Male Flare | 1/2" Male Flare | 7504 | | | 16 cu in. In-Line Drier; WAH164 | R12/R134a |
| 2 1/2" | 7 3/4" | QD | QD | 7145 | Side | | Enclosed Orifice Tube 13.88" OAL | R134a |
| 2 1/2" | 10" | 1/2" #8 Male O-ring | 1/2" #8 Male O-ring | 7502 | | | In-Line Drier | R12/R134a |
| 2 1/2" | 11" | 1/2" SAE | 1/2" SAE | 7548 | Side | | 30cu in., 1/2" SAE; Carrier WSG304 | R134a |
| 2 5/8" | 7 1/2" | 3/8" #6 Female O-ring | 3/8" #6 Male O-ring | 7562 | | | PRV, 16cu in. dessicant, Kysor | R134a |
| 2 3/4" | 6 3/4" | 3/8" #6 Male Flare | 3/8" #6 Male Flare | 7501 | | | In-Line Drier WAH 163 | R12/R134a |
| 3" | 10" | Flare | 1/2" Male Flare | 7540 | | | In-Line Drier | R12/R134a |
| 3" | 10 1/2" | 5/8" SAE | 5/8" SAE | 7551 | | | 30cu in., 5/8" SAE; Carrier WAH305 | R134a |
| 3 3/4" | 10 3/4" | Flare 1/2" | Flare 1/2" | 7517 | | | In-Line Drier, TransAir | R12/R134a |
| 3" | 11 1/2" | 1/2" #8 Male O-ring | 1/2" #8 Male O-ring | 7549 | Side | | 30cu in., 1/2" MO; Carrier ADK304 | R134a |

RECEIVER DRIERS



Filter Drier manufacturers have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

Flare End Fittings - Male *INLET* and Male *OUTLET*

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|--------|---------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|---------------------------------|-----------|
| 1 3/4" | 20 1/4" | 3/8" #6 | 3/8" #6 | 7142 | Side | | | | | | | In-Line Design | R12 |
| 2 1/2" | 6 5/8" | Flare | Flare | 7158 | Top | | Side | | | | | w/Fuse Plug | R12/R134a |
| 2 1/2" | 8" | 3/8" #6 | 3/8" #6 | 7152 | Top | | | | | | | | R12/R134a |
| 2 1/2" | 8 1/4" | 3/8" #6 | 3/8" #6 | 7218 | Top | Side | | | | | Top | 7120 w/Flare Adptr (4913 +1430) | R12/R134a |
| 2 3/4" | 6 3/4" | 3/8" #6 | 3/8" #6 | 7501 | | | | | | | | In-Line Design | R12/R134a |
| 3" | 6 1/4" | 3/8" #6 | 3/8" #6 | 7124 | Top | | Side | | | | | w/Fuse Plug | R12/R134a |
| 3" | 10" | Flare | Flare | 7540 | | | | | | | | In-Line Drier | R12/R134a |
| 4" | 7 3/4" | 3/8" #6 | 3/8" #6 | 7235 | Top | | Side | | | | | w/Fuse Plug | R12/R134a |
| 4" | 7" | 3/8" #6 | 3/8" #6 | 7211 | Side | | Side | | | | | w/Fuse Plug | R12/R134a |
| 4" | 7" | 3/8" #6 | 3/8" #6 | 7242 | Top | Side | Side | | | | | w/Fuse Plug | R12/R134a |

RECEIVER DRIERS

Listed in ascending order by Diameter x Length by Fitting Type and Size


Barb End Fittings (Push On)

| Dia. | LENGTH | INLET | OUTLET | PART NUMBER | Sight Glass | Switch Port | Fuse Plug | Schrader Valve | Moisture Indicator | Pressure Relief Valve | Low Pressure Switch | Note | Charge |
|--------|--------|---------|---------|-------------|-------------|-------------|-----------|----------------|--------------------|-----------------------|---------------------|------|--------|
| 2 1/2" | 8" | 3/8" #6 | 3/8" #6 | 7111 | Top | | | | | | | | R12 |



Filter Drier manufacturers have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

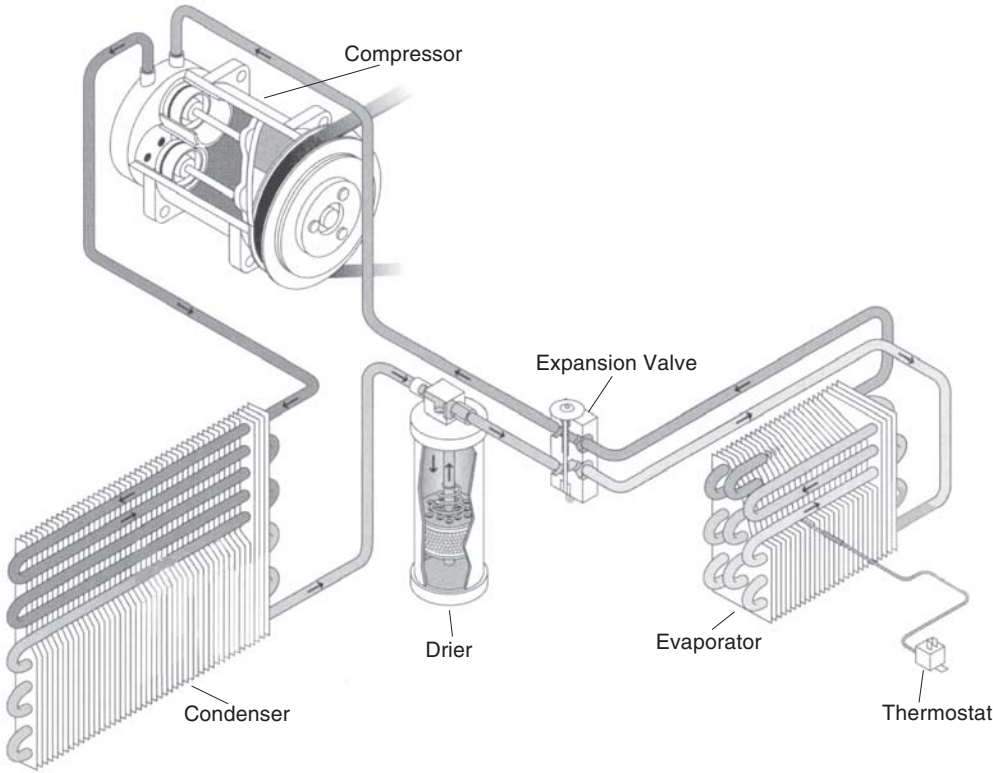Typical Drier System



RECEIVER DRIERS

RECEIVER DRIERS (ACCUMULATORS)

3 1/2" Diameter Accumulators

Listed in ascending order by Diameter x Length by Fitting Type and Size

| Length | Inlet Type | Inlet Size | Outlet Type | Outlet Size | PART NUMBER | Note |
|----------|--------------------|------------|--------------------|-------------|--------------|---|
| 8" | Female O-ring | M27 | Male Insert O-ring | M27 | 7444 | (1) M12 Port, GM 15-1739 |
| 8" | Female O-ring | 3/4" #12 | Female O-ring | 3/4" #12 | 7406 | Universal Type Accumulator; GM |
| 8" | Male Insert O-ring | 5/8" #10 | Male Insert O-ring | 3/4" #12 | 7483 | (2) 1/4" Ports, Ford F4TZ-19C836A |
| 8 1/8" | Male Insert O-ring | 1/2" #8 | Male Insert O-ring | 3/4" #12 | 7493F | Sterling F6HZ-19C836A (factory type) |
| 8 1/8" | Male Insert O-ring | 1/2" #8 | Male Insert O-ring | 3/4" #12 | 7493G | Sterling F6HZ-19C836A (aftermarket type) |
| 8 1/2" | Female O-ring | 3/4" #12 | Female O-ring | 3/4" #12 | 7407 | Universal Type Accumulator GM |
| 8 3/4" | Male Springlock | 5/8" #10 | Male Springlock | 5/8" #10 | 7478 | (1) Switch Port, Ford YF1747 |
| 8 3/4" | Male Springlock | 5/8" #10 | Male Springlock | 5/8" #10 | 7482 | (1) Switch Port, Ford, f4uz-19c836a |
| 9" | Female Insert o.r. | 1/2" #8 | Female Insert o.r. | 3/4" #12 | 7486 | Ford F65Z-19C1836AA |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7427 | 2724802, 3090492 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7428 | 1131394, 2724260 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7431 | (2) 1/4" Ports; 1131506, 3059317, 27248336 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7435 | (1) 1/4" Service Port; 2724707, 2724708 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7447 | (1) 1/4" Port, GM 15-1595, 15-1577, 2724690 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7448 | (2) Service Ports; 1131409, 2724263, 2724194 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7450 | (2) Serv Ports; 1131404, 2724265, 2724266, 2724199 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7459 | (2) 1/4" Ports; GM 1131475, 2724877, 3057034, 3058262 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7461 | 15-1309, 15-1651, 3059108, 3090896, 3092026, 3059239 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7462 | GM 1131428, 2724273, 2724813 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7468 | (2) 1/4" Ports, GM 15-1397, 15-1662, 1131507 |
| 9" | Female O-ring | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7432 | GM 1131645, 2724410, 2724411, 3092267 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7430 | w/13mm R134a Port; 2724885, 2724665 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7434 | w/R134a Port and R12 Port; 2724845, 1131960 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7446 | (1) M12 Port, GM 15-1612, 2724817 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7439 | (1) M12 Port (1) M13 Port, GM 15-1684, 2724902 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7440 | (1) M12 Port (1) M13 Port, GM 15-1637, 2724847 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7466 | w/M12 Port; GM 15-1490, 15-1677, 2724475 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7466M | w/M12 Port 1 3/4" below Fittings, GM 2724899 |
| 9" | Female O-ring | M27 | Male Insert O-ring | M27 | 7469 | (1) M12 Port (1) M13 Port, GM 15-1652 |
| 9" | Female Springlock | 3/4" #12 | Male Springlock | 3/4" #12 | 7383 | E69Z-19C836B, YF1861, YF2123 |
| 9" | Male Insert O-ring | 3/4" #12 | Male Insert O-ring | 5/8" #10 | 7454 | Ford E3TZ-19C836B, E7TZ-19C836A; YF1119, YF1429 |
| 9" | Male Springlock | 3/4" #12 | Female Springlock | 3/4" #12 | 7485 | (1) M12 Port (1) M13 Port, Ford E49Z-19C836C |
| 9 1/2" | Female O-ring | 1 1/16" | Female O-ring | 1 1/16" | 7409 | Peterbilt 18-03837; 700001 |
| 9 1/2" | Female O-ring | 1 1/16" | Female O-ring | 1 1/16" | 7543 | (Steel) Caterpillar 1018789 |
| 9 3/4" | Female Springlock | 5/8" #10 | Male Insert O-ring | 5/8" #10 | 7381 | E3TZ-19C836C, E4TZ-19C836A; YF1850, YF1852 |
| 9 3/4" | Female Springlock | 3/4" #12 | Male Insert O-ring | 3/4" #12 | 7479 | E6VY-19C836A |
| 9 13/16" | - | - | - | - | 7544 | Caterpillar 197-6218, 089320-00 |
| 10" | Female Springlock | 5/8" #10 | Female Springlock | 5/8" #10 | 7162 | Two (2) Schrader Valves 1 Side, 1 Top; Fuse Plug - Side |
| 10" | Male Insert O-ring | 3/4" #12 | Male Insert O-ring | 3/8" #6 | 7369 | E0VY- E1VY- E0AZ, and E1AZ-19C836A; YF1045 |
| 10" | Male Insert O-ring | 5/8" #10 | Male Insert O-ring | 3/4" #12 | 7477 | (2) 1/4" Ports; Ford E2TZ-19C836A |
| 11 1/2" | Female Springlock | 5/8" #10 | Male Insert O-ring | 5/8" #10 | 7209 | F1TZ-19C836B |
| 12" | Male Springlock | 5/8" #10 | Male Springlock | 3/4" #12 | 7476 | E8UZ-19C836A |
| 12.3 | Male O-ring | 7/8" | Male O-ring | 7/8" | 7385 | w/R134a Service Port; Ford F4HZ-19C836A, 089248-00 |
| - | - | - | - | - | 7561 | Coronado A22-63993-000 |
| - | - | - | - | - | 7487 | Ford F75Z-19C836AA |
| - | - | - | - | - | 7488 | Ford F7UZ-19C836BB |
| - | - | - | - | - | 7489 | Ford F75Z-19C836BA |
| - | - | - | - | - | 7490 | Ford XL3Z-19C836AA |

(ACCUMULATORS) RECEIVER DRIERS

3 1/2" Diameter Accumulators (continued)


Listed in ascending order by Diameter x Length by Fitting Type and Size

| Length | Inlet Type | Inlet Size | Outlet Type | Outlet Size | PART NUMBER | Note |
|--------|------------|------------|-------------|-------------|-------------|---|
| - | - | - | - | - | 7494 | Ford XL3Z-19C836BA |
| - | - | - | - | - | 7495 | Ford E Series 2C2Z-19C836BA |
| - | - | - | - | - | 7552 | Ford w/diesel 4C2Z-19C836AA |
| - | - | - | - | - | 7553 | Ford w/gas 2C2Z-19C836AA; 5C2Z-19C836AA |
| - | - | - | - | - | 7554 | Topkick/Kodiak 1132813 |
| - | - | - | - | - | 7416 | Navistar Prostar 3666273-C1 |

Pad Type Accumulators

| Dia. | Length | Inlet Type | Inlet Size | Outlet Type | Outlet Size | PART NUMBER | Note |
|--------|---------|------------|------------|----------------------|-------------|-------------|-----------------------------------|
| 2 1/2" | 7" | Pad Type | - | - | - | 7547 | CAT 113-3497 |
| 2 1/2" | 10" | Pad Type | - | - | - | 7546 | Komatsu 20Y-979-320, CAT 176-1902 |
| 3 1/2" | 8 7/8" | Pad Type | - | Female Insert O-ring | 3/4" #12 | 7496 | Ford F81Z-19C836AA |
| 3 1/2" | 8 7/8" | | | | | 7496A | Ford F250/350, 6C3Z-19C836A |
| 3 1/2" | 9" | Pad Type | - | Male Insert O-ring | M27 | 7457 | (1) M12 Port (1) M13 Port, GM |
| 3 1/2" | 9 1/8" | Pad Type | #12 | | #12 | 7408 | Peterbilt 18-04171; 700075 |
| 4" | 10 1/4" | Pad Type | - | Female Insert O-ring | 3/4" #12 | 7498 | Ford F85Z-19C836AB |

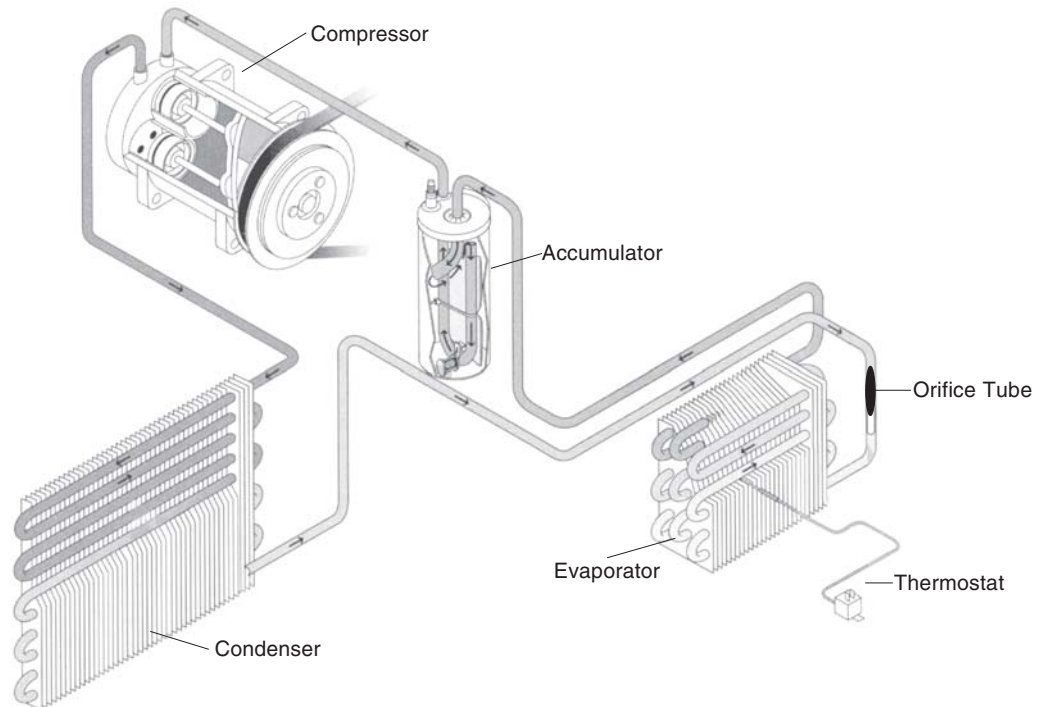Typical Accumulator System



RECEIVER DRIERS

Quick Disconnect Fittings



4138
Quick Disconnect For IHC Applications



4139
For All Quick Disconnect Type Driers

Moisture Indicators

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"



4150
3/8" Male O-ring
3/8" Female O-ring



4153
3/8" Male O-ring
3/8" Female O-ring
Female Switch Port



4157
3/8" Male O-ring
3/8" Female O-ring
High Pressure Relief Valve
Male Schrader Port



4158
3/8" Male O-ring
3/8" Female O-ring
Switch Port (use 4155)



4159
3/8" Male O-ring
3/8" Male O-ring



4160
1/2" Male Flare
1/2" Female Flare

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|---|--|--|
|  <p>7107 Dia. - 3" Lgth. - 8 1/4" In - 11/16" Female O-ring Out - 3/8" Female O-ring Top Sight Glass</p> |  <p>7111 Dia. - 2 1/2" Lgth. - 8" In/Out - 3/8" x 3/8" Top Sight Glass Push-on Barb; R12 Only</p> |  <p>7118 Dia. - 2 1/2" Lgth. - 8" 3/8" x 3/8" Male O-ring Top Sight Glass Female Switch Port, 1/4" Male Switch Port Freightliner A22-14425-2</p> |
|  <p>7120 Dia. - 2 1/2" Lgth. - 8" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Low Pressure Switch</p> |  <p>7123 Dia. - 3" Lgth. - 6 1/2" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass, Side Switch Port P.R.V. & Moisture Indicator</p> |  <p>7124 Dia. - 3" Lgth. - 6 1/4" In/Out - 3/8" x 3/8" Male Flare Top Sight Glass, Fuse Plug</p> |
|  <p>7125 Dia. - 3" Lgth. - 6" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass, Side Switch Port High Pressure Relief Valve</p> |  <p>7126 Dia. - 3" Lgth. - 6 1/2" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass, Side Schrader Valve High Pressure Relief Valve</p> |  <p>7127 Dia. - 3" Lgth. - 6 1/2" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Side Binary Switch, Fuse Plug</p> |
|  <p>7128 Dia. - 3" Lgth. - 6 1/2" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Side Trinary Switch, Fuse Plug</p> |  <p>7129 Dia. - 3" Lgth. - 6" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass, Fuse Plug</p> |  <p>7130 Dia. - 3" Lgth. - 10" In - 11/16" Female O-ring Out - 3/8" Female O-ring Top Sight Glass Pressure Relief Plug</p> |

RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

RECEIVER DRIERS

| | | |
|--|--|---|
|   <p>7131 Dia. - 3" Lgth. - 10" In - 11/16" Female O-ring Out - 3/8" Female O-ring Charge Port 3/16" Moisture Indicator Pressure Relief Valve</p> |   <p>7132 Dia. - 3" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Side Sight Glass Top Schrader Valve Moisture Indicator Pressure Relief Valve</p> |   <p>7133 Dia. - 3" Lgth. - 8 1/4" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Top Switch Port Moisture Indicator Pressure Relief Valve</p> |
|   <p>7134 Dia. - 3" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Top Switch Port Moisture Indicator Pressure Relief Valve</p> |   <p>7135 Dia. - 3" Lgth. - 8" In - 3/8" Male O-ring Out - 3/8" Female O-ring Top Sight Glass 2 Schrader Valves Moisture Indicator Pressure Relief Valve</p> |   <p>7140 Dia. - 2 1/2" Lgth. - 6 3/4" In - 3/8" Male O-ring Out - 1/2" Male O-ring In-Line Design</p> |
|   <p>7141 Dia. - 3" Lgth. - 8 1/4" In/Out - 3/8" x 3/8" Male O-ring Side Sight Glass, Top Switch Port</p> |   <p>7142 Dia. - 1 3/4" Lgth. - 20 1/4" In/Out - 3/8" x 3/8" Male Flare Side Sight Glass In-Line Design; R12 Only</p> |   <p>7143 Dia. - 3" Lgth. - 8 1/4" In/Out - 3/8" x 3/8" Male O'ring Schrader Valve, Fuse Plug Moisture Indicator</p> |
|   <p>7145 Dia. - 2 1/2" Lgth. - 7 3/4" (13.88" OAL) Quick Disconnect Enclosed Orifice Tube Moisture Indicator; 134a Only</p> |   <p>7152 Dia. - 2 1/2" Lgth. - 8" In/Out - 3/8" x 3/8" Male Flare Top Sight Glass</p> | |

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|---|---|---|
|  <p>7154 Dia. - 2 3/4" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Side Pressure Switch Pressure Relief Valve</p> |  <p>7155 Dia. - 2 3/4" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Side Schrader Valve Pressure Relief Valve</p> |  <p>7156 Dia. - 2 3/4" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Side Switch Port Pressure Relief Valve</p> |
|  <p>7157 Dia. - 2 3/4" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Side Trinary Switch Pressure Relief Valve</p> |  <p>7158 Dia. - 2 1/2" Lgth. - 6 5/8" In/Out - 3/8" x 3/8" Male Flare w/ Fuse Plug Top Sight Glass</p> <p>085022-01</p> |  <p>7159 Dia. - 3" Lgth. - 9" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Top Schrader Valve Moisture Indicator Pressure Relief Valve</p> |
|  <p>7160 Dia. - 3" Lgth. - 10" In - 3/8" Male O-ring Out - 3/8" Female O-ring Top Sight Glass 2 Schrader Valves Moisture Indicator Pressure Relief Valve</p> <p>ABPN83-319714</p> |  <p>7161 Dia. - 3" Lgth. - 8" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass 2 Schrader Valves Fuse Plug</p> |  <p>7162 Dia. - 3 1/2" Lgth. - 10" Spring Lock 2 Schrader Valves</p> |
|  <p>7163 Dia. - 3" Lgth. - 10" Quick Disconnect Top Sight Glass (2) 1/4" Schrader Valves Moist Indicator; R134a Only</p> |  <p>7164 Dia. - 3" Lgth. - 9" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Pressure Relief Valve Side Switch Port Moisture Indicator</p> |  <p>7165 Dia. - 3" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Schrader Valve Pressure Relief Valve</p> |

RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

RECEIVER DRIERS



7166
Dia. - 3"
Lgth. - 10"
3/8" x 3/8" Male O-ring
Top Sight Glass
Pressure Relief Valve
Moisture Indicator
Metric Schrader Valve (M10)



7167
Dia. - 3"
Lgth. - 10"
3/8" x 3/8" Male O-ring
Gauge Port, Fuse Plug,
Moisture Indicator, Side Sight Glass



7168
Dia. - 3"
Lgth. - 10"
Quick Disconnect
Top Sight Glass
2 Schrader Valves - M10
Moisture Indicator; R134a Only



7169
Dia. - 3"
Lgth. - 10"
In - 3/8" Male O-ring
Out - 3/8" Female O-ring
Top Sight Glass
2 Schrader Valves - M10



7170
Dia. - 3"
Lgth. - 8"
In - 3/8" Male O-ring
Out - 3/8" Female O-ring
Top Sight Glass
Pressure Relief Valve
Moisture Indicator
2 Schrader Valves - M10



7171
Dia. - 3"
Lgth. - 10 1/2"
3/8" x 3/8" Male O-ring
Contains 80cc of Mineral Oil
2 Schrader Valves - R12 Only



7172
Dia. - 3"
Lgth. - 8 1/4"
In - 3/8" Male O'ring
Out - 3/8" Female O'ring
Top Sight Glass
High Pressure Relief Valve
2 Schrader Valves - R12 Only



7173
In-Line Drier; R134a Only
Dia. - 2 1/2"
Lgth. - 6" (9.6" overall)
Quick Disconnect



7174
Dia. - 3"
Lgth - 9"
3/8" x 3/8" Male O-ring
Pressure Relief Valve
Moisture Indicator



7175
Dia. - 3"
Lgth. - 10"
In/Out - 3/8" x 3/8" Male O-ring
Side Sight Glass



7176
Dia. - 2 1/2"
Lgth - 6"
Quick Disconnect
Top Sight Glass
1 Schrader Valve - M10

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|--|---|---|
|  <p>7179 Dia. - 3" Lgth. - 10" Quick Disconnect Top Sight Glass Pressure Relief Valve R134a Service Port; R134a Only</p> |  <p>7180 Dia. - 3" Lgth. - 8" In/Out - 3/8" x 3/8" Male O-ring 2 Schrader Valves - M10 PH088340-01</p> |  <p>7181 Dia. - 2 1/2" Lgth. - 5 1/8" Top Sight Glass Manifold/Gasket Internal Fuse Plug</p> |
|  <p>7185 Dia. - 3" Lgth. - 9" In/Out - 3/8" x 3/8" Male O-ring Moisture Indicator Pressure Relief Valve</p> |  <p>7189 Dia. - 3" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Moisture Indicator</p> |  <p>7190 Dia. - 3" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Moisture Indicator</p> |
|  <p>7191 Dia. - 3" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass</p> |  <p>7193 Dia. - 3" Lgth. - 10" In - 3/8" Male O-ring Out - 3/8" Male O-ring Top Sightglass Fuse Plug, (1) 1/4" Port Western Star</p> |  <p>7197 Dia. - 3" Lgth. - 10" Slimline Connect (2) M10 Switch Ports Pressure Relief Plug ABPN83-319744</p> |
|  <p>7198 (SlimLine Connection) Dia. - 3" Lgth. - 10 1/4" In/Out - 3/8" x 3/8" SlimLine use #0126 Seal (2) M10 Switch Ports Moisture Indicator, R134a Only ABPN83-319534</p> |  <p>7199 Dia. - 3" Lgth. - 9 5/8" In - QD (side) Out - QD (top) Top Sight Glass Quick Disconnect 60mm (2 3/8") ABPN83-319524; 088470-01</p> |  <p>7207 Dia. - 2 1/2" Lgth. - 9 1/2" In/Out - 3/8" x 3/8" Male O-ring</p> |

RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

RECEIVER DRIERS

| | | |
|---|---|--|
|  <p>7209 Ford Accumulator Dia. - 3 1/2" Lgth. - 11" In - 5/8" Male O-ring Out - 5/8" Female Springlock (2) 1/4" Ports F1TZ-19C836B</p> |  <p>7211 Dia. - 4" Lgth. - 7" In/Out - 3/8" x 3/8" Male Flare Top Sight Glass, Fuse Plug</p> |  <p>7214 Dia. - 4" Lgth. - 5 1/4" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Fuse Plug</p> |
|  <p>7218 Dia. - 2 1/2" Lgth. - 8" In/Out - 3/8" x 3/8" Male Flare Top Sight Glass Low Pressure Switch</p> |  <p>7219 Dia. - 2 1/2" Lgth. - 9 1/2" In/Out - 3/8" x 3/8" Male O-ring</p> |  <p>7223 Dia. - 4" Lgth. - 7" In - 3/8" Female O-ring Out - 3/8" Male O-ring Sight Glass, Fuse Plug</p> |
|  <p>7229 Dia. - 3" Lgth. - 8 1/2" 3/8" x 3/8" Male O-ring Top Sight Glass Male Schrader Port Female Switch Port Low Pressure Switch Pressure Relief Valve</p> |  <p>7230 Dia. - 3" Lgth. - 10" In - 11/16" Female O-ring Out - 3/8" Female O-ring Top Sight Glass Pressure Relief Valve 16mm Service Port; R134a Only</p> |  <p>7232 Dia. - 4" Lgth. - 7" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Fuse Plug</p> |
|  <p>7233 Dia. - 4" Lgth. - 7 1/2" In/Out - 3/8" x 3/8" Female / Male O-ring (2) Side Sight Glass</p> |  <p>7234 Dia. - 4" Lgth. - 8 1/2" In/Out - 3/8" x 3/8" Male Insert O-ring Moisture Indicator Switch Port Fuse Plug</p> | |

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|--|---|---|
|  <p>7235 Dia. - 4" Lgth. - 7 3/4" In/Out - 3/8" x 3/8" Male Flare Top Sight Glass Fuse Plug</p> |  <p>7236 Dia. - 4" Lgth. - 8 1/2" Quick Disconnect Top Sight Glass Moisture Indicator Low Pressure Switch Pressure Relief Valve; R134a Only</p> |  <p>7242 Dia. - 4" Lgth. - 7" In/Out - 3/8" x 3/8" Male Flare Off Road Equipment with Side Female Switch Port, Top Sight Glass, & Fuse Plug 3500-1</p> |
|  <p>7243 Dia. - 4" Lgth. - 7 1/2" 5/8" -18 Male x Female Insert O-ring (2) Side Sight Glasses; John Deere RE 491969</p> |  <p>7346 Dia. - 3" Lgth. - 9 3/4" Sight Glass In/Out - 3/8" x 3/8" Male O-ring</p> |  <p>7360 Dia. - 2 1/2" Lgth. - 9 3/4" In/Out - 3/8" x 3/8" Male O-ring Nuts Welded to Bracket</p> |
|  <p>7369 Accumulator Ford Dia. - 3 1/2" Lgth. - 10" In - 3/4" Male O-ring Out - 3/4" Male O-ring (2) R12 Ports E1VY-19C836A, YF1045</p> |  <p>7376 Dia. - 2 1/2" Lgth. - 7 1/2" In/Out - 3/8" x 3/8" Male O-ring</p> |  <p>7381 Accumulator Ford Dia. - 3 1/2" Lgth. - 9 3/4" In - 5/8" Male O-ring Out - 5/8" Female Springlock (2) 1/4" Ports E3TZ-19C936C, E4TZ-19C936A, YF1850, YF1852</p> |
|  <p>7383 Accumulator Ford Dia. - 3 1/2" Lgth. - 9" In - 3/4" Male Springlock Out - 3/4" and 5/8" Female Springlock (2) 1/4" Ports E69Z-19C836B</p> |  <p>7385 Accumulator Dia. - 3 1/2" Lgth. - 12.3" In - 7/8" Male Out - 7/8" Male M12 Switch Port, R134a Charge Port 089248-00, F4HZ-19C836A</p> |  <p>7386 Dia. - 3" Lgth. - 10" Quick Disconnect Side Sight Glass Moisture Indicator; R134a Only</p> |

RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"


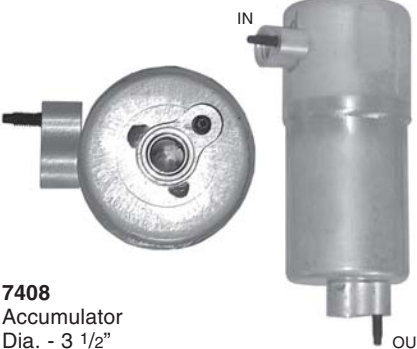







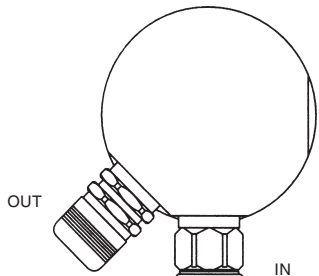


RECEIVER DRIERS

| | | |
|--|--|---|
|  <p>7387 Dia. - 3" Lgth. - 10" In - 3/8" Female O-ring Out - 3/8" Male O-ring Moisture Indicator Side Sight Glass</p> |  <p>7388 Dia. - 2 3/4" Lgth. - 10" 3/8" x 3/8" Male O-ring Side Sight Glass Top Switch Port Pressure Relief Valve</p> |  <p>7389 Dia. - 2 3/4" Lgth. - 10" 3/8" x 3/8" Male O-ring Side Sight Glass Top Schrader Valve Pressure Relief Valve</p> |
|  <p>7390 Dia. - 2 3/4" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Side Sight Glass Top Trinary Switch Pressure Relief Valve</p> |  <p>7391 Dia. - 4" Lgth. - 7 3/4" 3/8" x 3/8" Male O-ring Top Sight Glass Moisture Indicator Side Low Pressure Switch Pressure Relief Valve; R134a Only</p> |  <p>7392 Dia. - 4" Lgth. - 8 3/4" In - 3/8" Female O-ring Out - 3/8" Male O-ring Top Sight Glass Side Sight Glass Moisture Indicator</p> <p>John Deere AT151981, AT162848</p> |
|  <p>7393 Dia. - 3" Lgth. - 11" Manifold connection type R134a Only Kenworth T2000, F37-6000</p> |  <p>7394 Dia. - 4" Lgth. - 6 1/2" In/Out - 3/8" x 3/8" Male O-ring Top Sight Glass Fuse Plug</p> |  <p>7395 Dia. - 4" Lgth. - 7 3/4" In - 3/8" Female O-ring Out - 3/8" Male O-ring</p> |
|  <p>7396 Dia. - 4" Lgth. - 6" Horizontal Type In - 3/8" Female Piloted O-ring Fitting Out - 3/8" Female Piloted O-ring Fitting</p> |  <p>7406 Universal Accumulator Dia. - 3 1/2" Lgth. - 8" In - 3/4" Female O-ring Out - 3/4" Female O-ring (2) R12 Ports</p> | |

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|--|---|--|
|  <p>7407 Universal Accumulator Dia. - 3 1/2" Lgth. - 8" In - 3/4" Female O-ring Out - 3/4" Female O-ring (2) R12 Ports</p> |  <p>7408 Accumulator Dia. - 3 1/2" Lgth. - 9 1/8" uses (2) #0017 o-rings, #4589SR fitting</p> <p>Peterbilt Pad 18-04171</p> |  <p>7409 Dia. - 3 1/2" Lgth. - 9 1/8" In - 1 1/16" Female O-ring Out - 1 1/16" Female O-ring Peterbilt 18-03837</p> |
|  <p>7415 Dia. - 3 7/16" Lgth. - 9 1/2" Pad Mount Navistar 3542577C2; BOA80-323-00-139</p> |  <p>7416 Accumulator Assy. 2008 Navistar Prostar 3666273-C1</p> |  <p>7427 Accumulator GM Dia. - 3 1/2" Lgth. - 9" In - 3/4" Female O-ring Out - 3/4" Male O-ring (2) 1/4" Ports</p> <p>2724802, 3090492</p> |
|  <p>7428 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In - 3/4" Female O-ring Out- 3/4" Male O-ring (2) 1/4" Ports</p> <p>1131394, 2724260</p> |  <p>7430 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In - M27 x 2 5/8" Female O-ring Out - M27 x 2 5/8" Male Insert O-ring (1) M12 Port; (1) M13 R134a Port</p> <p>2724665, 2724885</p> |  <p>7431 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In - 3/4" Female O-ring Out - 3/4" Male Insert O-ring (2) 1/4" Ports</p> <p>1131506, 3059317</p> |
|  <p>7432 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In - 3/4" Female O-ring Out - 3/4" Male Insert O-ring</p> <p>2724411, 3092267</p> |  <p>7434 Accumulator GM Dia. - 3 1/2"; Lgth. - 8" In - 3/4" Female O-ring Out- 3/4" Male O-ring (1) 1/4" Port</p> <p>1131843, 2724542, 2724689</p> |  <p>7435 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In - 3/4" Female O-ring Out - 3/4" Male Insert O-ring (1) 1/4" Port</p> <p>2724707, 2724708</p> |

RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"




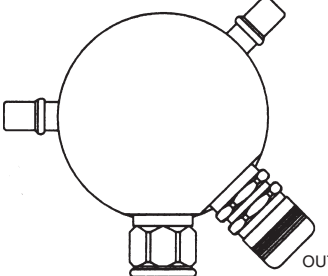
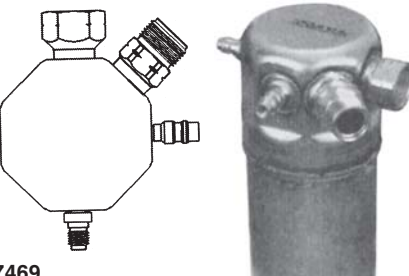







RECEIVER DRIERS

| | | |
|--|--|---|
|  <p>7439 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -M27 Female O-ring Out -M27 Male O-ring (1) M12 Port; (1) M13 R134a Port</p> <p>15-1684, 2724902</p> |  <p>7440 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -M27 Female O-ring Out -M27 Male O-ring (1) M12 Port; (1) M13 R134a Port</p> <p>15-1637, 2724847</p> |  <p>7444 Accumulator GM Dia. - 3 1/2"; Lgth. - 8" In -M27 Female O-ring Out -M27 MIO (1) M12 Port</p> <p>15-1739, 15-1740, 15-1741, 15-1784</p> |
|  <p>7446 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -M27 Female O-ring Out -M27 Male O-ring (1) M12 Port</p> <p>15-1612, 2724817</p> |  <p>7447 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -3/4" Female O-ring Out -3/4" Male Insert O-ring (1) 1/4" Port</p> <p>15-1595, 15-1577, 2724690</p> |  <p>7448 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -3/4" Female O-ring Out -3/4" Male Insert O-ring (2) 1/4" Ports</p> <p>15-1331, 15-1648, 2724194</p> |
|  <p>7450 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -3/4" Female O-ring Out -3/4" Male O-ring (2) 1/4" Ports</p> <p>15-1333, 15-1679, 2724804</p> |  <p>7454 Accumulator Ford Dia. - 3 1/2"; Lgth. - 10" In -5/8" Male Insert O-ring Out -3/4" Male Insert O-ring (2) 1/4" Ports</p> <p>YF1119, YF1429, E7TZ-19C836A</p> |  <p>7457 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In - Pad Type Out -M27 Male Insert O-ring (1) M12 Port (1) M13 R134a Port</p> |
|  <p>7459 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -3/4" Female O-ring Out -3/4" Male Insert O-ring (2) 1/4" Ports</p> <p>15-1374, 15-1681, 2724877</p> |  <p>7461 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In -3/4" Female O-ring Out -3/4" Male Insert O-ring (2) 1/4" Ports</p> <p>15-1399, 15-1651, 2724865</p> | |

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|--|--|--|
|  <p>7462 Accumulator GM Dia. - 3 1/2"; Lgth. - 9" In - 3/4" Female O-ring Out - 3/4" Male Insert O-ring (2) 1/4" Ports</p> |  <p>7466 Accumulator GM Dia. - 3 1/2" Lgth. - 9" In - 3/4" Female O-ring Out - 3/4" Male Insert O-ring (1) M12 Port 1 3/4" below Fittings</p> |  <p>7466M Accumulator GM Dia. - 3 1/2" Lgth. - 9" In - M27 Female O-ring Out - M27 Male Insert O-ring (1) M12 Port 1 3/4" below Fittings</p> |
|  <p>7468 Accumulator GM Dia. - 3 1/2" Lgth. - 9" In - 3/4" Female O-ring Out - 3/4" Male Insert O-ring (2) 1/4" Ports</p> |  <p>7469 Accumulator GM Dia. - 3 1/2" Lgth. - 9" In - M27 Female O-ring Out - M27 Male Insert O-ring (1) M12 Port; (1) M13 R134a Port</p> |  <p>7470 Strap Bracket For driers up to 2 1/2" in diameter</p> |
|  <p>7471 Universal Drier Bracket For driers 2 1/4" to 3" in diameter</p> |  <p>7472 Heavy Duty Drier Bracket For driers 3" in diameter</p> |  <p>7473 Heavy Duty Compact Bracket For driers up to 4" in diameter</p> |
|  <p>7476 Accumulator Ford Dia. - 3 1/2" Lgth. - 12" In - 3/4" Male Springlock Out - 3/4" Male Springlock (1) 1/4" Port</p> <p>E8UZ-19C836A</p> |  <p>7477 Accumulator Ford Dia. - 3 1/2" Lgth. - 10" In - 5/8" Male Insert O-ring Out - 3/4" Male Insert O-ring (2) 1/4" Ports</p> <p>#10 Male</p> <p>E2TZ-19C836A</p> |  <p>7478 Accumulator Ford Dia. - 3 1/2" Lgth. - 8 3/4" In - 5/8" Male Springlock Out - 5/8" Male Springlock</p> <p>YF1747</p> |

RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.













#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|---|--|--|
|  <p>7479 Accumulator Ford Dia. - 3 1/2" Lgth. - 9 3/4" In - 3/4" Male Insert O-ring Out - 3/4" Female Springlock (2) 1/4" Ports</p> <p>E6VY-19C836A</p> |  <p>7480 Dia. - 2 1/2" Lgth. - 8 1/4" 3/8" x 3/8" Male O-ring Top Sight Glass Switch Port</p> |  <p>7481 Dia. - 4" Lgth. - 7" In - 3/8" Male O-ring Out - 3/8" Male O-ring Fuse Plug; Bracket Ford Tractor E4NN-19825AA</p> |
|  <p>7482 Accumulator Ford Dia. - 3 1/2" Lgth. - 8 3/4" In - 5/8" Male Springlock Out - 5/8" Male Springlock (1) Switchport</p> <p>F4UZ-19C836A</p> |  <p>7483 Accumulator Ford Dia. - 3" Lgth. - 8" In - 5/8" Male Insert O-ring Out - 3/4" Male Insert O-ring (2) M12 Ports</p> <p>F4TZ-19C836A</p> |  <p>7485 Accumulator Ford Dia. - 3 1/2" Lgth. - 9" In - 3/4" Male Springlock Out - 3/4" Female Springlock (1) M12 Port (1) M13 R134a Port</p> <p>E49Z-19C836C</p> |
|  <p>7486 Accumulator Ford Dia. - 3 1/2" Lgth. - 9" In - 1/2" #8 Female Insert O-ring Out - 3/4" #12 Female Insert O-ring</p> <p>F65Z-19C836AA</p> |  <p>7487 Accumulator Ford F75Z-19C836AA</p> |  <p>7488 Accumulator Ford F-Series F7UZ-19C836BB</p> |
|  <p>7489 Accumulator Ford F75Z-19C836BA</p> |  <p>7490 Accumulator Ford XL3Z-19C836AA</p> |  <p>7493F O.E. Style Ford Accumulator Dia. - 3 1/2" Lgth. - 8 1/8" In - 1/2" #8 MIO Out - 3/4" #12 MIO</p> <p>F6HZ-19C836A, F7HH-19E647AB, 4C4H-19C808AA</p> |

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators. We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|--|--|---|
|  <p>7493G Aftermarket Style Ford Accumulator Dia. - 3 1/2" Lgth. - 8 1/8" In - 1/2" #8 MIO Out - 3/4" #12 MIO</p> <p>F6HZ-19C836A, YF2236</p> |  <p>7494 Accumulator Ford XL3Z-19C836BA YF2582</p> |  <p>7495 Accumulator Ford Truck E Series 2C2Z-19C836BA</p> |
| <p>Plastic housing not included. Must reuse old housing or use #7496A which includes the housing.</p>  <p>7496 Accumulator Ford Dia. - 3 1/2" Lgth. - 8 7/8" In - PAD Out - 3/4" #12 Female Insert O'ring F81Z-19C836AA</p> |  <p>7496A Accumulator (includes plastic housing) Dia. - 3 1/2" Lgth. - 8 7/8" Ford F250/350 6C3Z-19C836A</p> |  <p>7498 Accumulator Ford Dia. - 4" Lgth. - 10 1/4" In - PAD Out - 3/4" #12 Female Insert O'ring F85Z-19C836AB</p> |
|  <p>1/2" F.O.</p> <p>uses special #0170 o-rings</p> <p>7500 Dia. - 2 1/2" Lgth. - 7" WAH 164FO In-Line 1/2" Flare/O-ring</p> <p>1/2" F.O.</p> |  <p>OUT</p> <p>7501 Dia. - 2 1/2" Lgth. - 6 3/4" In/Out - 3/8" x 3/8" Male Flare WAH163</p> <p>IN</p> |  <p>OUT</p> <p>7502 Dia. - 2 1/2" Lgth. - 10" In/Out - 3/8" x 3/8" Male O-ring Red Dot remote condenser</p> <p>IN</p> |
|  <p>OUT</p> <p>7503 Dia. - 2 1/2" Lgth. - 6 3/4" M18 Inlet x M20 Outlet Male O-ring In-line Design</p> <p>IN</p> |  <p>7504 Dia. - 2 1/2" Lgth. - 7" 16 cu. in. In-Line Drier WAH 164, 1/2" Male Flare</p> |  <p>OUT IN</p> <p>course thread check valve</p> <p>7513 Dia. - 2 1/2" Lgth. - 6 5/16" In - 3/8" Male O-ring Out - Quick Disconnect Fitting (1) M10 Port; Top Sight Glass 33-0038A</p> |



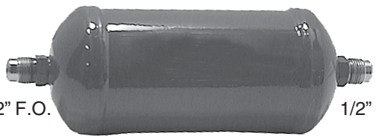





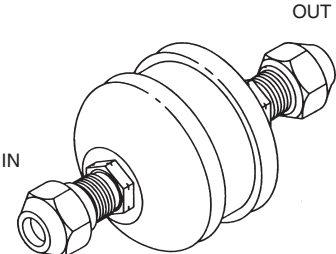



RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

RECEIVER DRIERS

| | | |
|--|--|--|
|  <p>7514 Dia. - 2 1/2" Lgth. - 6 5/16" In - M18 Male Out - Quick Disconnect Fitting (1) M10 Port; Top Sight Glass 33-0382A</p> |  <p>7515 Dia. - 2 1/2" Lgth. - 6 5/16" In - M18 Male Out - M18 Male (1) M10 Port; Top Sight Glass 33-0383A</p> |  <p>7517 Dia. - 3 3/4" Lgth. - 10 3/4" 1/2" Flare, 41 ci.in. dessicant TYPE AH414 In-LineDrier/TransAir A/C</p> |
|  <p>7519 Dia. - 2 1/2" Lgth. - 6.32" In - M18 Male Out - M12 Male Adapter M10 Switch Port GM Chasis Motor Home# 085686</p> |  <p>7524 Dia. - 2 1/2" Lgth. - 6.32" In - M18 Male Out - M18 Male M10 Switch Port 085722</p> |  <p>7525 Dia. - 2 7/16" Lgth. - 5" In - 3/8" Female Springlock Out - 3/8" Male Springlock</p> |
|  <p>7526 Dia. - 2 7/16" Lgth. - 5 1/4" In - 1/2" Female Springlock Out - 1/2" Male Springlock</p> |  <p>7527 Dia. - 2 7/16" Lgth. - 3" In - 1/2" Female O-ring Out - 1/2" Male Insert O-ring</p> |  <p>7530 3/8" x 3/8" Compression 7531 1/2" x 1/2" Compression Dia. - 2 7/16" Lgth. - 2 11/16"</p> |
|  <p>7532 Dia. - 2 1/2" Lgth. - 5.9" Side Fuse Plug Port 3/8" O-ring In/Out - 3/8" x 3/8" Male O-ring 085428-00</p> |  <p>7540 In-Line Drier Dia. - 3" Lgth. - 10" In - Flare Out - Flare, 1/2" Male Flare EK 304</p> |  <p>7541 In-Line Drier w/sight glass Dia. - 2 3/4" Lgth. - 8 1/2" In/Out - 1/2" Male O-ring CARRIER #14-00288-00 uses #0013 o-rings</p> |

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|---|---|---|
|  <p>IN OUT</p> <p>uses special #0170 o-rings</p> <p>7542 In-Line Drier w/sight glass Dia. - 2 3/4" Lgth. - 8 1/2" In/Out - 1/2" Flare O-ring WSG164FO</p> |  <p>IN OUT</p> <p>7543 Dia. - 3 1/2" Lgth. - 9 1/8" In - 1 1/16" Female O-ring Out - 1 1/16" Female O-ring Accumulator/Caterpillar O.E.# 1018789 (Steel)</p> |  <p>OUT IN</p> <p>7544 Dia. - 3 1/2" Lgth. - 9 13/16" CATERPILLAR 089320-00; 197-6218</p> |
|  <p>7545 Dia. - 3" Lgth. - 10 1/2" Pad Type Drier w/16mm port VOLVO OFF-ROAD 11104567</p> |  <p>7546 Dia. - 2 1/2" Lgth. - 10" Pad Type Accumulator Komatsu 20Y-979-320 Caterpillar 176-1902</p> |  <p>7547 Dia. - 2 1/2" Lgth. - 7" Pad Type Accumulator Caterpillar 113-3497</p> |
|  <p>IN OUT</p> <p>7548 Dia. - 2 1/2" Lgth. - 11" In-line Filter Drier w/sight glass 30 cu. in., 1/2" SAE Carrier WSG304</p> |  <p>IN OUT</p> <p>7549 Dia. - 3" Lgth. - 11 1/2" In-line Filter Drier w/sight glass 30 cu. in., 1/2" Male O-ring Carrier ADK304, WSG304MOI</p> |  <p>IN OUT</p> <p>7551 Dia. - 3" Lgth. - 10 1/2" In-line Filter Drier 30 cu. in., 5/8" SAE Carrier WAH305</p> |
|  <p>7552 Accumulator Ford 2006-2004 E-Series w/diesel eng. 4C2Z-19C836AA</p> |  <p>7553 Accumulator Ford 2006-2004 E-Series w/gas eng. 2C2Z-19C836AA, 5C2Z-19C836AA</p> |  <p>7554 Accumulator 2006-2003 Topkick/Kodiak 1132813</p> |

RECEIVER DRIERS

RECEIVER DRIERS

NOTE: Drier mfg's have discontinued using moisture indicators.
We will supply moisture indicators where applicable while supply lasts.

#6 = 3/8" #8 = 1/2" #10 = 5/8" #12 = 3/4"

| | | |
|--|---|--|
|  <p>7555 Dia. - 3" Lgth. - 6 1/2" 3/8" x 3/8" Male O'Ring Top Sight Glass, P.R.V. & Moisture Indicator RD5-9419-0</p> |  <p>7556 Pad Style 2003-06 Sprinter Van, 2.7TD 051-03570AA</p> |  <p>7557 Dia. - 1 5/8" Lgth. - 11 5/8" Pad Style 2007-08 Sprinter Van 680-013634AA</p> |
|  <p>7559 Dia. - 4" Lgth. - 7" Freightliner Columbia, M2 A22-63992-000, A22-63992-001</p> |  <p>7560 Dia. - 2 1/2" Lgth. - 7 3/4" (13.88" OAL) MIO fittings with orifice tube Caterpillar</p> | <p>Photo Not Available</p> |
|  <p>7562 Dia. - 2 5/8" Lgth. - 7 1/2" In - 3/8" #6 Male O-ring Out - 3/8" #6 Female O-ring Pressure Relief Valve 16 cu. in. dessicant Kysor 402618</p> |  <p>7563 Dia. - 2 1/2" Lgth. - 8" 3/8" Male O'ring x Male Q.D. Motorhome 054-00011</p> |  <p>7564 Dia. - 3.05" Lgth. - 14.35" Spring Lock Connections Ford New Holland 89154-00</p> |
|  <p>7565 Dia. - 4" Lgth. - 6 3/4" 3/8" x 3/8" Male O'ring Side Sight Glass Volvo Off Road VRE RD5-6075-0</p> |  <p>7566 Dia. - 4" Lgth. - 7" Freightliner Coronado A22-63994-001</p> |  <p>7567 Dia. - 3" Lgth. - 10" Port 1/4" SAE In - 1/2" #6 Male O-ring Out - 3/8" #6 Male O-ring</p> |

Drier Brackets

| | | | |
|--|--|--|---|
|  <p>7470 Strap Bracket For driers up to 2 1/2" in diameter</p> |  <p>7471 Universal Drier Bracket For driers 2 1/4" to 3" in diameter</p> |  <p>7472 Heavy Duty Drier Bracket For driers 3" in diameter</p> |  <p>7473 Heavy Duty Compact Bracket For driers up to 4" in diameter</p> |
|--|--|--|---|